

**DATASHEET
FOR
128M BIT SPI NOR FLASH**

BY25FQ128EL

Features

- **Serial Peripheral Interface**
 - Standard SPI: SCLK, /CS, SI, SO, /WP, /HOLD
 - Dual SPI: SCLK, /CS, IO0, IO1, /WP, /HOLD
 - Quad SPI: SCLK, /CS, IO0, IO1, IO2, IO3
 - QPI: SCLK, /CS, IO0, IO1, IO2, IO3
- **Read**
 - Normal Read (Serial): 100MHz clock rate
 - Fast Read (Serial): 133MHz clock rate with 30PF load
 - Dual I/O data transfer up to 266Mbits/S
 - Quad I/O data transfer up to 532Mbits/S
 - QPI data transfer up to 532Mbits/S
 - Allows XIP (execute in place) Operation: Continuous Read with 8/16/32/64-byte Wrap
- **Program**
 - Serial-input Page Program up to 256bytes
 - Program Suspend and Resume
- **Erase**
 - Block Erase (64/32 KB)
 - Sector Erase (4 KB)
 - Chip Erase
 - Erase Suspend and Resume
- **Program/Erase Speed**
 - Page Program time: 0.3ms typical
 - Sector Erase time: 20ms typical
 - Block Erase time: 0.06/0.1s typical
 - Chip Erase time: 25s typical
- **Flexible Architecture**
 - Sector of 4K-byte
 - Block of 32/64K-byte
- **Low Power Consumption**
 - 4mA typical active current
 - 3.3uA typical standby current
 - 0.6uA typical power down current
- **Software/Hardware Write Protection**
 - 3x1024-Byte Security Registers with OTP Locks
 - Discoverable Parameters (SFDP) register
 - Enable/Disable protection with WP Pin
 - Write protect all/portion of memory via software
 - Top or Bottom, Sector or Block selection
- **Single Supply Voltage**
 - Full voltage range: 1.65~2.0V
- **Temperature Range**
 - Commercial (-40°C to +85°C)
 - Industrial (-40°C to +85°C)
 - Industrial (-40°C to +105°C)
 - Industrial (-40°C to +125°C)
- **Cycling Endurance/Data Retention**
 - Typical 100k Program-Erase cycles on any sector
 - Typical 20-year data retention

Contents

| | |
|---|-----------|
| 1. Description | 5 |
| 2. Signal Description | 7 |
| 2.1 Input/Output Summary | 7 |
| 2.2 Chip Select (/CS) | 7 |
| 2.3 Serial Clock (SCLK) | 7 |
| 2.4 Serial Input (SI)/IO0 | 7 |
| 2.5 Serial Data Output (SO)/IO1 | 8 |
| 2.6 Write Protect (/WP)/IO2 | 8 |
| 2.7 HOLD (/HOLD) /RESET /IO3 | 8 |
| 2.8 VCC Power Supply | 8 |
| 2.9 VSS Ground | 8 |
| 3. Block/Sector Addresses | 9 |
| 4. SPI Operation | 10 |
| 4.1 Standard SPI Instructions | 10 |
| 4.2 Dual SPI Instructions | 10 |
| 4.3 Quad SPI Instructions | 10 |
| 4.4 QPI Instructions | 10 |
| 4.5 Switch between SPI and QPI operation | 11 |
| 5. Operation Features | 12 |
| 5.1 Supply Voltage | 12 |
| 5.1.1 Operating Supply Voltage | 12 |
| 5.1.2 Power-up Conditions | 12 |
| 5.1.3 Device Reset | 12 |
| 5.1.4 Power-down | 12 |
| 5.2 Active Power and Standby Power Modes | 12 |
| 5.3 Hold Condition | 13 |
| 5.4 Software Reset & Hardware RESET | 14 |
| 5.4.1 Software Reset | 14 |
| 5.4.2 Hardware Reset (/HOLD pin) | 14 |
| 5.5 Write Protect Features | 15 |
| 5.6 Status Register | 16 |
| 5.6.1 Status Register Table | 16 |
| 5.6.2 The Status and Control Bits | 17 |
| 5.7 Array Memory Protection | 20 |
| 5.7.1 Block Protect Table | 20 |
| 6. Device Identification | 22 |
| 7. Instructions Description | 23 |
| 7.1 Configuration and Status Instructions | 29 |
| 7.1.1 Write Enable (06H) | 29 |
| 7.1.2 Write Enable for Volatile Status Register (50H) | 30 |
| 7.1.3 Write Disable (04H) | 31 |
| 7.1.4 Read Status Register (05H or 35H or 15H) | 32 |
| 7.1.5 Write Status Register (01H or 31H or 11H) | 33 |
| 7.1.6 Enter QPI Mode (38H) | 35 |
| 7.1.7 Exit QPI Mode (FFH) | 35 |
| 7.1.8 Enable Reset (66H) and Reset Device (99H) | 36 |
| 7.2 Read Instructions | 37 |
| 7.2.1 Read Data (03H) | 37 |
| 7.2.2 Fast Read (0BH) | 38 |
| 7.2.3 Dual Output Fast Read (3BH) | 39 |
| 7.2.4 Quad Output Fast Read (6BH) | 40 |
| 7.2.5 Dual I/O Fast Read (BBH) | 41 |
| 7.2.6 Quad I/O Fast Read (EBH) | 43 |
| 7.2.7 Quad I/O Word Fast Read (E7H) | 46 |
| 7.2.8 Set Burst with Wrap (77H) | 48 |
| 7.2.9 Set Read Parameters (C0H) | 49 |
| 7.2.10 Burst Read with Wrap (0CH) | 50 |

| | |
|---|-----------|
| 7.3 ID and Security Instructions | 51 |
| 7.3.1 Read Manufacture ID/ Device ID (90H) | 51 |
| 7.3.2 Dual I/O Read Manufacture ID/ Device ID (92H) | 52 |
| 7.3.3 Quad I/O Read Manufacture ID/ Device ID (94H) | 53 |
| 7.3.4 Read JEDEC ID (9FH) | 54 |
| 7.3.5 Read Unique ID Number (4Bh) | 55 |
| 7.3.6 Deep Power-Down (B9H) | 56 |
| 7.3.7 Release from Deep Power-Down/Read Device ID (ABH) | 57 |
| 7.3.8 Read Security Registers (48H) | 59 |
| 7.3.9 Erase Security Registers (44H) | 60 |
| 7.3.10 Program Security Registers (42H) | 61 |
| 7.3.11 Read Serial Flash Discoverable Parameter (5AH) | 62 |
| 7.4 Program and Erase Instructions | 67 |
| 7.4.1 Page Program (02H) | 67 |
| 7.4.2 Quad Page Program (32H) | 68 |
| 7.4.3 Sector Erase (20H) | 69 |
| 7.4.4 32KB Block Erase (52H) | 70 |
| 7.4.5 64KB Block Erase (D8H) | 71 |
| 7.4.6 Chip Erase (60/C7H) | 72 |
| 7.4.7 Program/Erase Suspend (75H) | 73 |
| 7.4.8 Program/Erase Resume (7AH) | 75 |
| 8. Electrical Characteristics | 76 |
| 8.1 Absolute Maximum Ratings | 76 |
| 8.2 Operating Ranges | 76 |
| 8.3 Latch Up Characteristics | 77 |
| 8.4 Power-up Timing | 77 |
| 8.5 DC Electrical Characteristics | 78 |
| 8.6 AC Measurement Conditions | 81 |
| 8.7 AC Electrical Characteristics | 81 |
| 9. Package Information | 88 |
| 9.1 Package 8-Pin SOP 208-mil | 88 |
| 9.2 Package 8-Pin SOP8 150mil | 89 |
| 9.3 Package 8-Pad WSON8 5X6mm | 90 |
| 9.4 Package 8-Pad USON8 4X4mm | 91 |
| 10. Order Information | 92 |
| 10.1 Valid part Numbers and Top Side Marking | 93 |
| 10.2 Minimum Packing Quantity (MPQ) | 94 |
| 11. Document Change History | 95 |

1. Description

The BY25FQ128EL is 128M-bit Serial Peripheral Interface (SPI) Flash memory and support the standard Serial Peripheral Interface (SPI), Dual/Quad I/O SPI as well as 2-clocks instruction cycle Quad Peripheral Interface (QPI): Serial Clock, Chip Select, Serial Data I/O0 (DI), I/O1 (DO), I/O2 (/WP), and I/O3 (/HOLD). SPI clock frequencies of up to 133MHz are supported allowing equivalent clock rates of 266MHz (133MHz x 2) for Dual I/O and 532MHz (133MHzx4) for Quad I/O when using the Fast Read Dual/Quad and QPI instructions. These transfer rates can outperform standard Asynchronous 8 and 16-bit Parallel Flash memories. The Continuous Read Mode allows for efficient memory access with as few as 8-clocks of instruction-overhead to read a 24-bit address, allowing true XIP (execute in place) operation. The device uses a single low voltage power supply, ranging from 1.65 Volt to 2.0 Volt.

Additionally, the device supports JEDEC standard manufacturer and device ID and three 1024bytes Security Registers.

BYTe Semiconductor offers 8-pin SOP 150mil/208mil, 8-pad WSON 6x5-mm,8-pad USON 4x4-mm, and other special-order packages, please contact BYTe Semiconductor for ordering information.

Figure 1. Logic diagram

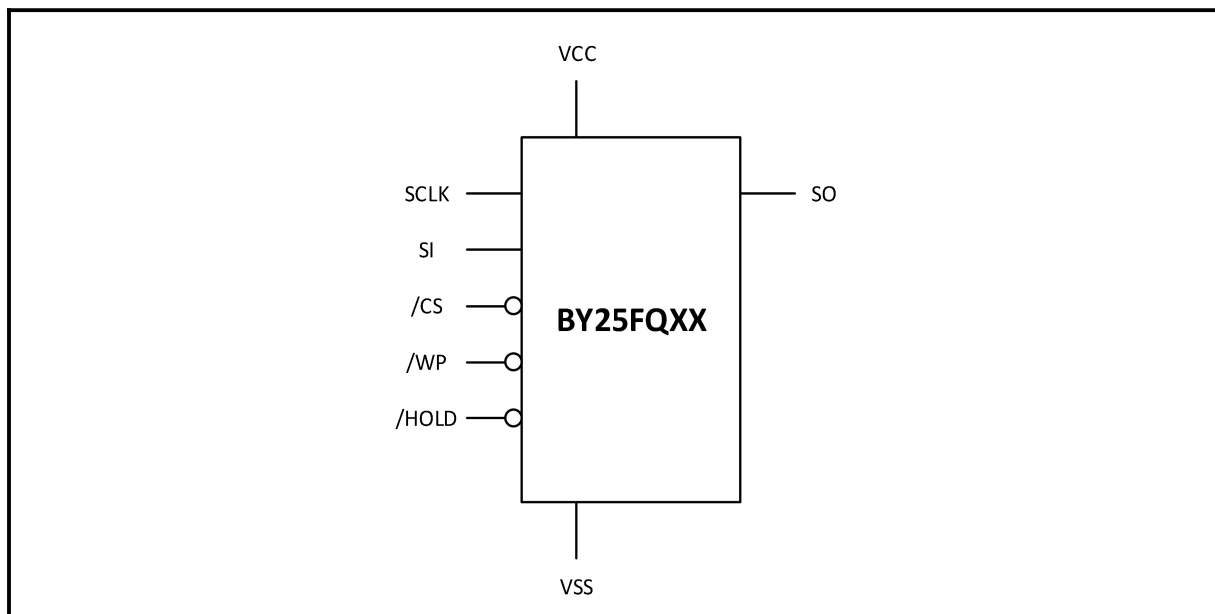


Figure 2. Pin Configuration SOP8 150mil/208 mil


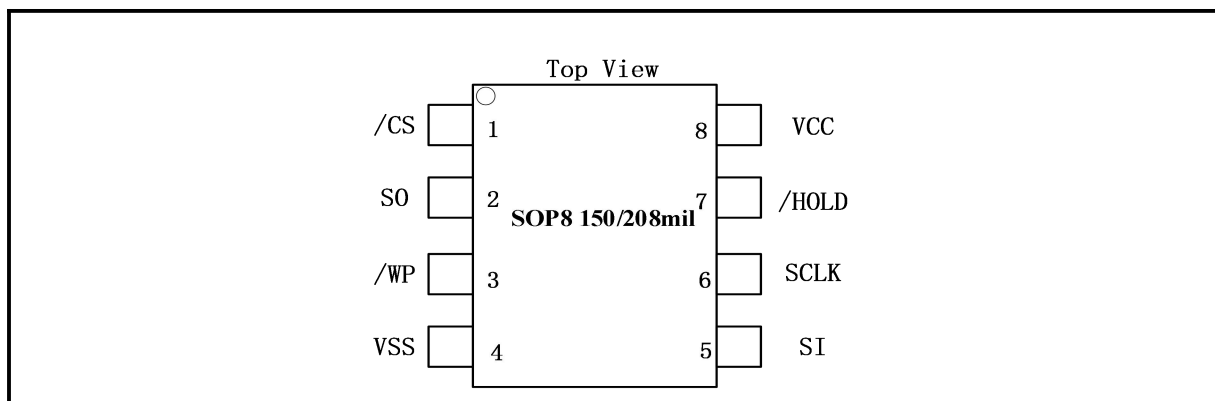


Figure 3. Pin Configuration WSON8 5X6mm and USON8 4X4mm

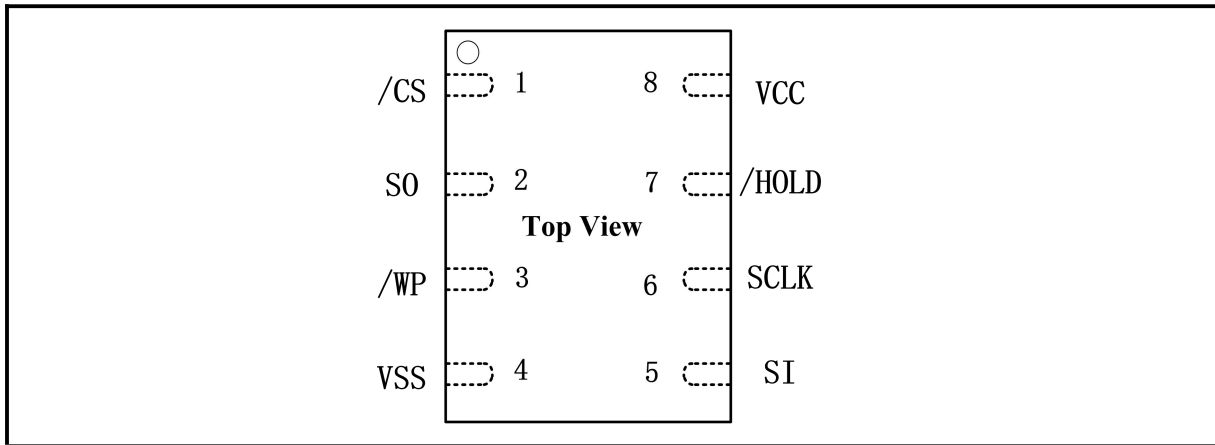

2. Signal Description

During all operations, VCC must be held stable and within the specified valid range: VCC (min) to VCC (max).

All of the input and output signals must be held High or Low (according to voltages of VIH, VOH, VIL or VOL, see **DC Electrical Characteristics**). These signals are described next.

2.1 Input/Output Summary

Table 1. Signal Names

| Pin Name | I/O | Description |
|-------------|-----|---|
| /CS | I | Chip Select |
| SO (IO1) | I/O | Serial Output for single bit data Instructions. IO1 for Dual or Quad Instructions |
| /WP (IO2) | I/O | Write Protect in single bit or Dual data Instructions. IO2 in Quad mode. The signal has an internal pull-up resistor and may be left unconnected in the host system if not used for Quad Instructions |
| VSS | | Ground |
| SI (IO0) | I/O | Serial Input for single bit data Instructions. IO0 for Dual or Quad Instructions |
| SCLK | I | Serial Clock |
| /HOLD (IO3) | I/O | Hold (pause) serial transfer in single bit or Dual data Instructions. IO3 in Quad-I/O. The signal has an internal pull-up resistor and may be left unconnected in the host system if not used for Quad Instructions |
| VCC | | Core and I/O Power Supply |

2.2 Chip Select (/CS)

The chip select signal indicates when an instruction for the device is in process and the other signals are relevant for the memory device. When the /CS signal is at the logic high state, the device is not selected, and all input signals are ignored and all output signals are high impedance. Unless an internal Program, Erase or Write Status Registers embedded operation is in progress, the device will be in the Standby Power mode. Driving the /CS input to logic low state enables the device, placing it in the Active Power mode. After Power Up, a falling edge on /CS is required prior to the start of any instruction.

2.3 Serial Clock (SCLK)

This input signal provides the synchronization reference for the SPI interface. Instructions, addresses, or data input are latched on the rising edge of the SCLK signal. Data output changes after the falling edge of SCLK.

2.4 Serial Input (SI)/IO0

This input signal is used to transfer data serially into the device. It receives instructions, addresses, and data to be programmed. Values are latched on the rising edge of serial SCLK clock signal.

SI becomes IO0 an input and output during Dual and Quad Instructions for receiving instructions, addresses, and data to be programmed (values latched on rising edge of serial SCLK clock signal) as well as shifting out data (on the falling edge of SCLK).

2.5 Serial Data Output (SO)/IO1

This output signal is used to transfer data serially out of the device. Data is shifted out on the falling edge of the serial SCLK clock signal.

SO becomes IO1 an input and output during Dual and Quad Instructions for receiving instructions, addresses, and data to be programmed (values latched on rising edge of serial SCLK clock signal) as well as shifting out data (on the falling edge of SCLK).

2.6 Write Protect (/WP)/IO2

When /WP is driven Low (VIL), while the Status Register Protect bits (SRP1 and SRP0) of the Status Registers (SR2[0] and SR1[7]) are set to 0 and 1 respectively, it is not possible to write to the Status Registers. This prevents any alteration of the Status Registers. As a consequence, all the data bytes in the memory area that are protected by the Block Protect, BP4, BP3 bits in the status registers, are also hardware protected against data modification while /WP remains Low. The /WP function is not available when the Quad mode is enabled (QE) in Status Register 2 (SR2[1]=1).

The /WP function is replaced by IO2 for input and output during Quad mode for receiving addresses, and data to be programmed (values are latched on rising edge of the SCLK signal) as well as shifting out data (on the falling edge of SCLK). /WP has an internal pull-up resistance; when unconnected; /WP is at VIH and may be left unconnected in the host system if not used for Quad mode.

2.7 HOLD (/HOLD) /RESET /IO3

The /HOLD function is only available when QE=0, which can be configured either as a /HOLD pin or as a /RESET pin depending on Status Register setting. If QE=1, the /HOLD function is disabled, the pin acts as dedicated data I/O pin, and the /HOLD or /RESET function is not available.

When QE=0 and HOLD/RST= 0, the /HOLD signal goes low to stop any serial communications with the device, but doesn't stop the operation of write status register, programming, or erasing in progress.

The operation of HOLD, need /CS keep low, and starts on falling edge of the /HOLD signal, with SCLK signal being low (if SCLK is not being low, HOLD operation will not start until SCLK being low). The HOLD condition ends on rising edge of /HOLD signal with SCLK being low (If SCLK is not being low, HOLD operation will not end until SCLK being low).

2.8 VCC Power Supply

VCC is the supply voltage. It is the single voltage used for all device functions including read, program, and erase.

2.9 VSS Ground

VSS is the reference for the VCC supply voltage.

3. Block/Sector Addresses

Table 2. Block/Sector Addresses of BY25FQ128EL

| Memory Density | Big Block (8M bit) | Block (64k byte) | Block (32k byte) | Sector No. | Sector Size(KB) | Address range | |
|----------------|--------------------|------------------|------------------|----------------|-----------------|------------------|-----------------|
| 128Mbit | Big Block 0 | Block 0 | Half block 0 | Sector 0 | 4 | 000000h-000FFFh | |
| | | | | : | : | : | |
| | | | | Sector 7 | 4 | 007000h-007FFFh | |
| | | | Half block 1 | Sector 8 | 4 | 008000h-008FFFh | |
| | | | | : | 4 | : | |
| | | | | Sector 15 | 4 | 00F000h-00FFFFh | |
| | | : | : | : | : | : | : |
| | | Block 15 | Half block 30 | Sector 240 | 4 | 0F0000h-0F0FFFh | |
| | | | | : | : | : | |
| | | | | Sector 247 | 4 | 0F7000h-0F7FFFh | |
| | | | Half block 31 | Sector 248 | 4 | 0F8000h-0F8FFFh | |
| | | | | : | : | : | |
| | | | | Sector 255 | 4 | 0FF000h-0FFFFFFh | |
| | | : | : | : | : | : | : |
| | | Big Block 15 | Block 240 | Half block 480 | Sector 3840 | 4 | F00000h-F00FFFh |
| | : | | | | : | : | |
| | Sector 3847 | | | | 4 | F07000h-F07FFFh | |
| | Half block 481 | | | Sector 3848 | 4 | F08000h-F08FFFh | |
| | | | | : | : | : | |
| | | | | Sector 3855 | 4 | F0F000h-F0FFFFh | |
| | : | | : | : | : | : | : |
| | Block 255 | | Half block 510 | Sector 4080 | 4 | FF0000h-FF0FFFh | |
| | | | | : | : | : | |
| | | | | Sector 4087 | 4 | FF7000h-FF7FFFh | |
| | | | Half block 511 | Sector 4088 | 4 | FF8000h-FF8FFFh | |
| | | | | : | : | : | |
| | | | | Sector 4095 | 4 | FFF000h-FFFFFFh | |

Notes:

1. Big Block = Uniform Big Block, and the size is 8M bits.
2. Block = Uniform Block, and the size is 64K bytes.
3. Half block = Half Uniform Block, and the size is 32k bytes.
4. Sector = Uniform Sector, and the size is 4K bytes.

4. SPI Operation

4.1 Standard SPI Instructions

The BY25FQ128EL features a serial peripheral interface on 4 signals bus: Serial Clock (SCLK), Chip Select (/CS), Serial Data Input (SI) and Serial Data Output (SO). Both SPI bus mode 0 and 3 are supported. Input data is latched on the rising edge of SCLK, and data shifts out on the falling edge of SCLK.

4.2 Dual SPI Instructions

The BY25FQ128EL supports Dual SPI operation when using the “Dual Output Fast Read” (3BH), “Dual I/O Fast Read” (BBH) and “Read Manufacture ID/Device ID Dual I/O” (92H) instructions. These instructions allow data to be transferred to or from the device at two times the rate of the standard SPI. When using the Dual SPI instruction, the SI and SO pins become bidirectional I/O pins: IO0 and IO1.

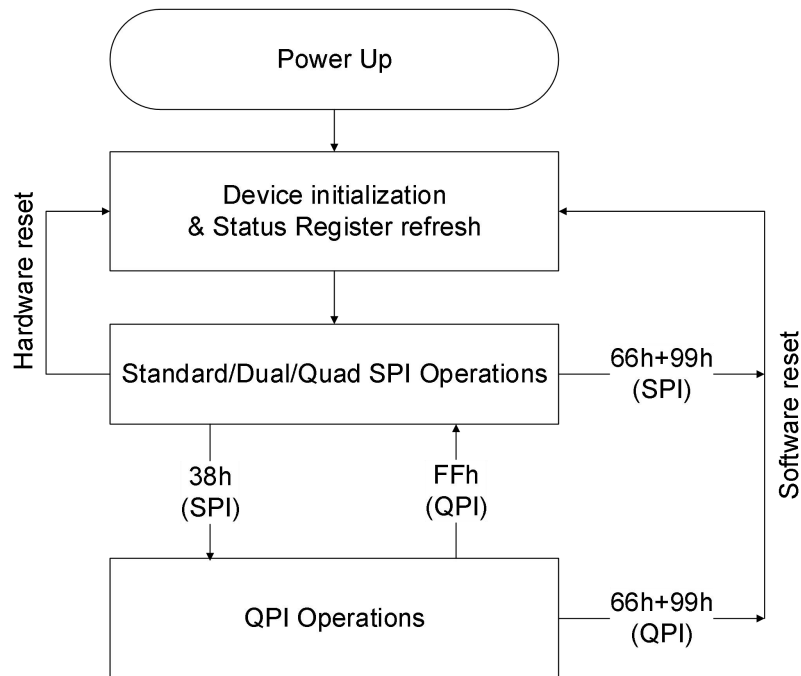
4.3 Quad SPI Instructions

The BY25FQ128EL supports Quad SPI operation when using the “Quad Output Fast Read” (6BH), “Quad I/O Fast Read” (EBH), “Quad I/O word Fast Read”(E7H), “Read Manufacture ID/Device ID Quad I/O”(94H) and “Quad Page Program”(32H) instructions. These instructions allow data to be transferred to or from the device at four times the rate of the standard SPI. When using the Quad SPI instruction, the SI and SO pins become bidirectional I/O pins: IO0 and IO1, and /WP and /HOLD pins become IO2 and IO3. Quad SPI instructions require the non-volatile Quad Enable bit (QE) in Status Register to be set.

4.4 QPI Instructions

The BY25FQ128EL supports Quad Peripheral Interface (QPI) operations only when the device is switched from Standard/Dual/Quad SPI mode to QPI mode using the “Enter QPI (38h)” instruction. The typical SPI protocol requires that the byte-long instruction code being shifted into the device only via DI pin in eight serial clocks. The QPI mode utilizes all four IO pins to input the instruction code, thus only two serial clocks are required. This can significantly reduce the SPI instruction overhead and improve system performance in an XIP environment. Standard/Dual/Quad SPI mode and QPI mode are exclusive. Only one mode can be active at any given time. “Enter QPI (38h)” and “Exit QPI (FFh)” instructions are used to switch between these two modes. Upon power-up or after a software reset using “Enable Reset (66h)” and “Reset (99h)” instruction, the default state of the device is Standard/Dual/Quad SPI mode. To enable QPI mode, the non-volatile Quad Enable bit (QE) in Status Register-2 is required to be set to 1. When using QPI instructions, the DI and DO pins become bidirectional IO0 and IO1, and the /WP and /HOLD pins become IO2 and IO3 respectively.

4.5 Switch between SPI and QPI operation



5. Operation Features

5.1 Supply Voltage

5.1.1 Operating Supply Voltage

Prior to selecting the memory and issuing instructions to it, a valid and stable VCC voltage within the specified [VCC(min), VCC(max)] range must be applied (see **Electrical Characteristics**). In order to secure a stable DC supply voltage, it is recommended to decouple the VCC line with a suitable capacitor (usually of the order of 10nF to 100nF) close to the VCC/VSS package pins. This voltage must remain stable and valid until the end of the transmission of the instruction and, for a Write instruction, until the completion of the internal write cycle (tW).

5.1.2 Power-up Conditions

When the power supply is turned on, VCC rises continuously from VSS to VCC. During this time, the Chip Select (/CS) line is not allowed to float but should follow the VCC voltage, it is therefore recommended to connect the /CS line to VCC via a suitable pull-up resistor.

In addition, the Chip Select (/CS) input offers a built-in safety feature, as the /CS input is edge sensitive as well as level sensitive: after power-up, the device does not become selected until a falling edge has first been detected on Chip Select (/CS). This ensures that Chip Select (/CS) must have been High, prior to going Low to start the first operation.

5.1.3 Device Reset

In order to prevent inadvertent, write operations during power-up (continuous rise of VCC), a power on reset (POR) circuit is included. At Power-up, the device does not respond to any instruction until VCC has reached the power on reset threshold voltage (this threshold is lower than the minimum VCC operating voltage defined in **Power-up Timing**).

When VCC is lower than V_{WI} , the device is reset.

5.1.4 Power-down

At Power-down (continuous decrease in VCC), as soon as VCC drops from the normal operating voltage to below the power on reset threshold voltage (V_{WI}), the device stops responding to any instruction sent to it. During Power-down, the device must be deselected (Chip Select (/CS) should be allowed to follow the voltage applied on VCC) and in Standby Power mode (that is there should be no internal Write cycle in progress).

5.2 Active Power and Standby Power Modes

When Chip Select (/CS) is Low, the device is selected, and in the Active Power mode. The device consumes ICC.


When Chip Select (/CS) is High, the device is deselected. If a Write cycle is not currently in progress, the device then goes into the Standby Power mode, and the device consumption drops to ICC1.

5.3 Hold Condition

When $QE=0$, $HOLD/RST=0$, the Hold (/HOLD) signal is used to pause any serial communications with the device without resetting the clocking sequence. During the Hold condition, the Serial Data Output (SO) is high impedance, and Serial Data Input (SI) and Serial Clock (SCLK) are Don't Care. To enter the Hold condition, the device must be selected, with Chip Select (/CS) Low. Normally, the device is kept selected, for the whole duration of the Hold condition. Deselecting the device while it is in the Hold condition, has the effect of resetting the state of the device, and this mechanism can be used if it is required to reset any processes that had been in progress.

The Hold condition starts when the Hold (/HOLD) signal is driven Low at the same time as Serial Clock (SCLK) already being Low (as shown in **Figure 4**). The Hold condition ends when the Hold (HOLD) signal is driven High at the same time as Serial Clock (C) already being Low. **Figure 4** also shows what happens if the rising and falling edges are not timed to coincide with Serial Clock (SCLK) being Low.

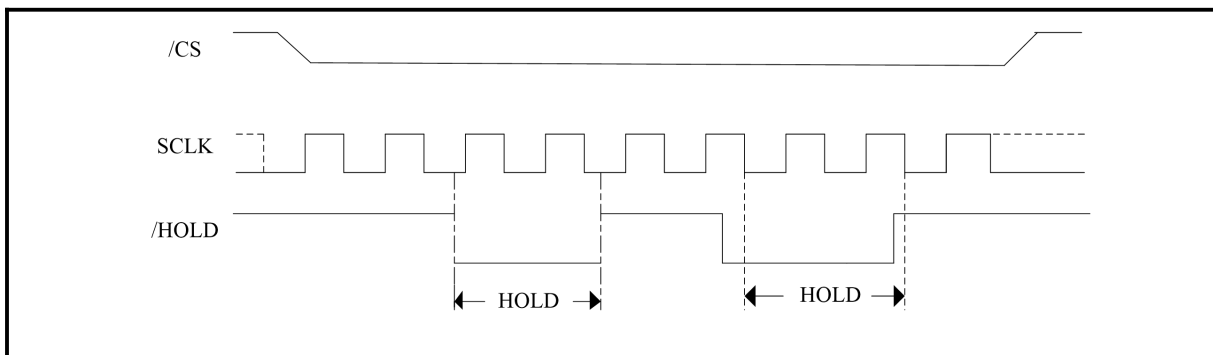Figure 4. Hold condition activation



5.4 Software Reset & Hardware RESET

5.4.1 Software Reset

The BY25FQ128EL can be reset to the initial power-on state by a software reset sequence. This sequence must include two consecutive instructions: Enable Reset (66h) & Reset (99h). If the instruction sequence is successfully accepted, the device will take approximately tRST to reset. No instruction will be accepted during the reset period.

5.4.2 Hardware Reset (/HOLD pin)

The BY25FQ128EL can also be configured to utilize hardware /RESET pin. The HOLD/RST bit in the Status Register-3 is the configuration bit for /HOLD pin function or /RESET pin function. When HOLD/RST=0 (factory default), the pin acts as a /HOLD pin as described above; when HOLD/RST=1, the pin acts as a /RESET pin. Drive the /RESET pin low for a minimum period of ~1us (tRESET⁽¹⁾) will reset the device to its initial power-on state. Any on-going Program/Erase operation will be interrupted, and data corruption may happen. While /RESET is low, the device will not accept any instruction input.

If QE bit is set to 1, the /HOLD or /RESET function will be disabled, the pin will become one of the four data I/O pin.

Hardware /RESET pin has the highest priority among all the input signals. Drive /RESET low for a minimum period of ~1us (tRESET⁽¹⁾) will interrupt any on-going external/internal operations, regardless the status of other SPI signals (/CS, CLK, IOs, /WP and /HOLD).

Notes:

1. While a faster /RESET pulse (as short as a few hundred nanoseconds) will often reset the device, a 1us minimum pulse is recommended to ensure reliable operation.

5.5 Write Protect Features

1. Software Protection (Memory array):
 - The Block Protect (BP4, BP3, BP2, BP1, BP0) bits define the section of the memory array that can be read but not change.
2. Hardware Protection (Status register): /WP going low to protect the writable bits of Status Register.
3. Deep Power-Down: In Deep Power-Down Mode, all instructions are ignored except the Release from deep Power-Down Mode instruction.
4. Device resets when VCC is below threshold: Upon power-up or at power-down, the BY25FQ128EL will maintain a reset condition while VCC is below the threshold value of V_{W1} . While reset, all operations are disabled, and no instructions are recognized.
5. Time delay write disable after Power-up: During power-up and after the VCC voltage exceeds $V_{CC (min)}$, all program and erase related instructions are further disabled for a time delay of t_{VSL} . This includes the Write Enable, Page Program, Sector Erase, Block Erase, Chip Erase and the Write Status Register instructions.
6. Write Enable: The Write Enable instruction is set the Write Enable Latch bit. The WEL bit will return to reset by following situation:
 - Power –up
 - Write Disable
 - Write Status Register (Whether the SR is protected, WEL will return to reset)
 - Page Program (Whether the program area is protected, WEL will return to reset)
 - Sector Erase/Block Erase/Chip Erase (Whether the erase area is protected, WEL will return to reset)
 - Software Reset
 - Hardware Reset
7. One Time Program (OTP) write protection for array and Security Registers using Status Register.

5.6 Status Register

5.6.1 Status Register Table

See **Table 3** for detail description of the Status Register bits.

Table 3. Status Register

| SR3 | | | | | | | | |
|------------------------|----------|------|------|----------|----------|----------|-----|-----|
| | S23 | S22 | S21 | S20 | S19 | S18 | S17 | S16 |
| | HOLD/RST | DRV1 | DRV0 | Reserved | Reserved | Reserved | DC1 | DC0 |
| Default ⁽¹⁾ | 0 | 1 | 0 | × | × | × | 0 | 0 |

| SR2 | | | | | | | | |
|------------------------|-----------|-----|-----|-----|-----|-----------|----|------|
| | S15 | S14 | S13 | S12 | S11 | S10 | S9 | S8 |
| | SUS1 | CMP | LB3 | LB2 | LB1 | SUS2 | QE | SRP1 |
| Default ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Read Only | | OTP | OTP | OTP | Read Only | | |

| SR1 | | | | | | | | |
|------------------------|------|-----|-----|-----|-----|-----|-----------|-----------|
| | S7 | S6 | S5 | S4 | S3 | S2 | S1 | S0 |
| | SRP0 | BP4 | BP3 | BP2 | BP1 | BP0 | WEL | WIP |
| Default ⁽¹⁾ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | | | | | | | Read Only | Read Only |

Notes:

1. The default value is set by Manufacturer during wafer sort, Marked as Default in following text

5.6.2 The Status and Control Bits

5.6.2.1 WIP bit

The Write in Progress (WIP) bit indicates whether the memory is busy in program/erase/write status register progress. When WIP bit sets to 1, means the device is busy in program/erase/write status register progress, when WIP bit sets 0, means the device is not in program/erase/write status register progress.

5.6.2.2 WEL bit

The Write Enable Latch (WEL) bit indicates the status of the internal Write Enable Latch. When set to 1 the internal Write Enable Latch is set, when set to 0 the internal Write Enable Latch is reset and no Write Status Register, Program or Erase, etc. instruction is accepted.

5.6.2.3 BP4, BP3, BP2, BP1, BP0 bits

The Block Protect (BP4, BP3, BP2, BP1, BP0) bits are non-volatile. They define the size of the area to be software protected against Program and Erase instructions. These bits are written with the Write Status Register instruction. When WPS=0, and the Block Protect (BP4, BP3, BP2, BP1, BP0) bits are set to 1, the relevant memory area (as defined in **Table 6-Table 7**).becomes protected against Page Program, Sector Erase and Block Erase instructions. The Block Protect (BP4, BP3, BP2, BP1, BP0) bits can be written provided that the Hardware Protected mode has not been set. The Chip Erase instruction is executed, if the Block Protect (BP2, BP1, BP0) bits are 0 and CMP=0 or The Block Protect (BP2, BP1, BP0) bits are 1 and CMP=1.

5.6.2.4 SRP1, SRP0 bits

The Status Register Protect (SRP1 and SRP0) bits are non-volatile Read/Write bits in the status register. The SRP bits control the method of write protection: software protection, hardware protection, power supply lock-down or one-time programmable protection.

Table 4. Status Register protect table

| SRP1 | SRP0 | /WP | Status Register | Description |
|------|------|-----|---------------------------------------|--|
| 0 | 0 | X | Software Protected | The Status Register can be written to after a Write Enable instruction, WEL=1.(Factory Default) |
| 0 | 1 | 0 | Hardware Protected | /WP=0, the Status Register locked and cannot be written. |
| 0 | 1 | 1 | Hardware Unprotected | /WP=1, the Status Register is unlocked and can be written to after a Write Enable instruction, WEL=1. |
| 1 | 0 | X | Power Supply Lock-Down ⁽¹⁾ | Status Register is protected and cannot be written to again until the next Power-Down, Power-Up cycle. |
| 1 | 1 | X | One Time Program ⁽²⁾ | Status Register is permanently protected and cannot be written to. |

Notes:

1. When SRP1, SRP0= (1, 0), a Power-Down, Power-Up cycle will change SRP1, SRP0 to (0, 0) state.
2. The One-time Program feature is available upon special order. Please contact BY Technology for details.

5.6.2.5 QE bit

The Quad Enable (QE) bit is a non-volatile Read/Write bit in the Status Register that allows Quad SPI and QPI operation. When the QE bit is set to 0 (Default) the /WP pin and /HOLD pin are enable. When the QE pin is set to 1, the Quad IO2 and IO3 pins are enabled. (The QE bit should never be set to 1 during standard SPI or Dual SPI operation if the /WP or /HOLD pins directly to the power supply).

QE bit is required to be set to 1 before issuing an “Enter QPI (38h)” instruction to switch the device from Standard/Dual/Quad SPI mode to QPI mode; otherwise, the command (38h) will be ignored. When the device is in QPI mode, QE bit will remain to be 1. A “Write Status Register” command in QPI mode cannot change QE bit from 1 to 0.

5.6.2.6 LB3/LB2/LB1 bits

The Security Register Lock (LB3/LB2/LB1) bits are non-volatile One Time Program (OTP) bits in Status Register (S13–S11) that provide the write protect control and status to the Security Registers. The default state of LB is 0, the security registers are unlocked. LB can be set to 1 individually using the Write Register instruction. LB is One Time Programmable, once they are set to 1, the Security Registers will become read-only permanently.

5.6.2.7 CMP bit

The Complement Protect (CMP) bit is a non-volatile Read/Write bit in the Status Register (S14). It is used in conjunction the BP4-BP0 bits to provide more flexibility for the array protection. Please see the Status Registers Memory Protection table for details. The default setting is CMP=0.

5.6.2.8 SUS1/SUS2 bits

The Suspend Status (SUS1 and SUS2) bits are read only bits in the status register2 (S15 and S10) that are set to 1 after executing a Program/Erase Suspend (75H) instruction (The Erase Suspend will set SUS1 to 1, and the Program Suspend will set the SUS2 to 1). The SUS1 and SUS2 bits are cleared to 0 by Program/Erase Resume (7AH) instruction as well as a power-down, power-up cycle.

5.6.2.9 DC1/DC0 bit

The Dummy Configuration (DC) bit is non-volatile, which selects the number of dummy cycles between the end of address and the start of read data output. Dummy cycles provide additional latency that is needed to complete the initial read access of the flash array before data can be returned to the host system. Some read commands require additional dummy cycles as the SCLK frequency increases.

The following dummy cycle tables provide different dummy cycle settings that are configured.

| Instruction | DC bit | Numbers of Dummy Cycles | Freq.(MHz) |
|-------------|-------------|-------------------------|------------|
| BBH | 00(default) | 4 | 108 |
| | 01 | 8 | 133 |
| | 10 | 4 | 108 |
| | 11 | 8 | 133 |
| EBH | 00(default) | 6 | 108 |
| | 01 | 8 | 133 |
| | 10 | 10 | 133 |
| | 11 | 14 | 133 |

5.6.2.10 HOLD/RST bit

The /HOLD or /RESET Pin Function (HOLD/RST) bit is used to determine whether /HOLD or /RESET function should be implemented on the hardware pin. When HOLD/RST=0 (factory default), the pin acts as /HOLD; when HOLD/RST=1, the pin acts as /RESET. However, /HOLD or /RESET functions are only available when QE=0. If QE is set to 1, the /HOLD and /RESET functions are disabled, the pin acts as a dedicated data I/O pin.

5.6.2.11 DRV1/DRV0 bits

The Output Driver Strength (DRV1&DRV0) bits are used to determine the output driver strength for the Read instruction.

Table 5. The Output Driver Strength

| DRV1,DRV0 | Driver Strength |
|-----------|-----------------|
| 00 | 100% |
| 01 | 75% |
| 10 | 50%(default) |
| 11 | 25% |

5.7 Array Memory Protection

5.7.1 Block Protect Table

Table 6. BY25FQ128EL Block Memory Protection (CMP=0)

| Status Register Content | | | | | Memory Content | | | |
|-------------------------|-----|-----|-----|-----|----------------|-----------------|---------|--------------|
| BP4 | BP3 | BP2 | BP1 | BP0 | Blocks | Addresses | Density | Portion |
| X | X | 0 | 0 | 0 | NONE | NONE | NONE | NONE |
| 0 | 0 | 0 | 0 | 1 | 252 to 255 | FC0000H-FFFFFFH | 256KB | Upper 1/64 |
| 0 | 0 | 0 | 1 | 0 | 248 to 255 | F80000H-FFFFFFH | 512KB | Upper 1/32 |
| 0 | 0 | 0 | 1 | 1 | 240 to 255 | F00000H-FFFFFFH | 1MB | Upper 1/16 |
| 0 | 0 | 1 | 0 | 0 | 224 to 255 | E00000H-FFFFFFH | 2MB | Upper 1/8 |
| 0 | 0 | 1 | 0 | 1 | 192 to 255 | C00000H-FFFFFFH | 4MB | Upper 1/4 |
| 0 | 0 | 1 | 1 | 0 | 128 to 255 | 800000H-FFFFFFH | 8MB | Upper 1/2 |
| 0 | 1 | 0 | 0 | 1 | 0 to 3 | 000000H-03FFFFH | 256KB | Lower 1/64 |
| 0 | 1 | 0 | 1 | 0 | 0 to 7 | 000000H-07FFFFH | 512KB | Lower 1/32 |
| 0 | 1 | 0 | 1 | 1 | 0 to 15 | 000000H-0FFFFFH | 1MB | Lower 1/16 |
| 0 | 1 | 1 | 0 | 0 | 0 to 31 | 000000H-1FFFFFH | 2MB | Lower 1/8 |
| 0 | 1 | 1 | 0 | 1 | 0 to 63 | 000000H-3FFFFFH | 4MB | Lower 1/4 |
| 0 | 1 | 1 | 1 | 0 | 0 to 127 | 000000H-7FFFFFH | 8MB | Lower 1/2 |
| X | X | 1 | 1 | 1 | 0 to 255 | 000000H-FFFFFFH | 16MB | ALL |
| 1 | 0 | 0 | 0 | 1 | 255 | FF0000H-FFFFFFH | 4KB | Top Block |
| 1 | 0 | 0 | 1 | 0 | 255 | FFE000H-FFFFFFH | 8KB | Top Block |
| 1 | 0 | 0 | 1 | 1 | 255 | FFC000H-FFFFFFH | 16KB | Top Block |
| 1 | 0 | 1 | 0 | X | 255 | FF8000H-FFFFFFH | 32KB | Top Block |
| 1 | 0 | 1 | 1 | 0 | 255 | FF8000H-FFFFFFH | 32KB | Top Block |
| 1 | 1 | 0 | 0 | 1 | 0 | 000000H-000FFFH | 4KB | Bottom Block |
| 1 | 1 | 0 | 1 | 0 | 0 | 000000H-001FFFH | 8KB | Bottom Block |
| 1 | 1 | 0 | 1 | 1 | 0 | 000000H-003FFFH | 16KB | Bottom Block |
| 1 | 1 | 1 | 0 | X | 0 | 000000H-007FFFH | 32KB | Bottom Block |
| 1 | 1 | 1 | 1 | 0 | 0 | 000000H-007FFFH | 32KB | Bottom Block |

Table 7. BY25FQ128EL Block Memory Protection (CMP=1)

| Status Register Content | | | | | Memory Content | | | |
|-------------------------|-----|-----|-----|-----|----------------|------------------|---------|-------------|
| BP4 | BP3 | BP2 | BP1 | BP0 | Blocks | Addresses | Density | Portion |
| X | X | 0 | 0 | 0 | 0 to 255 | 000000H-FFFFFFH | ALL | ALL |
| 0 | 0 | 0 | 0 | 1 | 0 to 251 | 000000H-FBFFFFH | 16128KB | Lower 63/64 |
| 0 | 0 | 0 | 1 | 0 | 0 to 247 | 000000H-F7FFFFH | 15872KB | Lower 31/32 |
| 0 | 0 | 0 | 1 | 1 | 0 to 239 | 000000H-EFFFFFH | 15KB | Lower 15/16 |
| 0 | 0 | 1 | 0 | 0 | 0 to 223 | 000000H-DFFFFFH | 14MB | Lower 7/8 |
| 0 | 0 | 1 | 0 | 1 | 0 to 191 | 000000H-BFFFFFH | 12MB | Lower 3/4 |
| 0 | 0 | 1 | 1 | 0 | 0 to 127 | 000000H-7FFFFFH | 8MB | Lower 1/2 |
| 0 | 1 | 0 | 0 | 1 | 4 to 255 | 040000H-FFFFFFH | 16128KB | Upper 63/64 |
| 0 | 1 | 0 | 1 | 0 | 8 to 255 | 080000H-FFFFFFH | 15872KB | Upper 31/32 |
| 0 | 1 | 0 | 1 | 1 | 16 to 255 | 100000H-FFFFFFH | 15KB | Upper 15/16 |
| 0 | 1 | 1 | 0 | 0 | 32 to 255 | 200000H-FFFFFFH | 14MB | Upper 7/8 |
| 0 | 1 | 1 | 0 | 1 | 64 to 255 | 400000H-FFFFFFH | 12MB | Upper 3/4 |
| 0 | 1 | 1 | 1 | 0 | 128 to 255 | 800000H-FFFFFFH | 8MB | Upper 1/2 |
| X | X | 1 | 1 | 1 | NONE | NONE | NONE | NONE |
| 1 | 0 | 0 | 0 | 1 | 0 to 255 | 000000H-FFEFFFFH | 16380KB | L-4095/4096 |
| 1 | 0 | 0 | 1 | 0 | 0 to 255 | 000000H-FFDFFFFH | 16376KB | L-2047/2048 |
| 1 | 0 | 0 | 1 | 1 | 0 to 255 | 000000H-FFBFFFFH | 16368KB | L-1023/1024 |
| 1 | 0 | 1 | 0 | X | 0 to 255 | 000000H-FF7FFFFH | 16352KB | L-511/512 |
| 1 | 0 | 1 | 1 | 0 | 0 to 255 | 000000H-FF7FFFFH | 16352KB | L-511/512 |
| 1 | 1 | 0 | 0 | 1 | 0 to 255 | 001000H-FFFFFFH | 16380KB | U-4095/4096 |
| 1 | 1 | 0 | 1 | 0 | 0 to 255 | 002000H-FFFFFFH | 16376KB | U-2047/2048 |
| 1 | 1 | 0 | 1 | 1 | 0 to 255 | 004000H-FFFFFFH | 16368KB | U-1023/1024 |
| 1 | 1 | 1 | 0 | X | 0 to 255 | 008000H-FFFFFFH | 16352KB | U-511/512 |
| 1 | 1 | 1 | 1 | 0 | 0 to 255 | 008000H-FFFFFFH | 16352KB | U-511/512 |

6. Device Identification

Three legacy Instructions are supported to access device identification that can indicate the manufacturer, device type, and capacity (density). The returned data bytes provide the information as shown in the below table.

Table 8. BY25FQ128EL ID Definition table

| Operation Code | M7-M0 | ID15-ID8 | ID7-ID0 |
|----------------|-------|----------|---------|
| 9FH | 68 | 60 | 18 |
| 90H/92H/94H | 68 | | 17 |
| ABH | | | 17 |

7. Instructions Description

All instructions, addresses and data are shifted in and out of the device, beginning with the most significant bit on the first rising edge of SCLK after /CS is driven low. Then, the one-byte instruction code must be shifted in to the device, most significant bit first on SI, each bit being latched on the rising edges of SCLK.

See **Table 9**, every instruction sequence starts with a one-byte instruction code. Depending on the instruction, this might be followed by address bytes, or by data bytes, or by both or none. /CS must be driven high after the last bit of the instruction sequence has been shifted in. For the instruction of Read, Fast Read, Read Status Register or Release from Deep Power Down, and Read Device ID, the shifted-in instruction sequence is followed by a data out sequence. /CS can be driven high after any bit of the data-out sequence is being shifted out.

For the instruction of Page Program, Sector Erase, Block Erase, Chip Erase, Write Status Register, Write Enable, Write Disable or Deep Power-Down instruction, etc. /CS must be driven high exactly at a byte boundary, otherwise the instruction is rejected, and is not executed. That is /CS must drive high when the number of clock pulses after /CS being driven low is an exact multiple of eight. For Page Program, if at any time the input byte is not a full byte, nothing will happen and WEL will not be reset.

Table 9. Instruction Set Table

 Instruction Set Table 1 (Standard/Dual/Quad SPI Instructions)⁽¹⁾

| Instruction Name | Byte 1 | Byte 2 | Byte 3 | Byte 4 | Byte 5 | Byte 6 |
|--|---------|--------------------------|------------|--------------------------|--------------------------|--------------------------|
| Write Enable | 06h | | | | | |
| Volatile SR Write Enable | 50h | | | | | |
| Write Disable | 04h | | | | | |
| Read Status Register-1 | 05h | (S7-S0) ⁽²⁾ | | | | |
| Write Status Register-1 ⁽⁴⁾ | 01h | (S7-S0) ⁽⁴⁾ | | | | |
| Read Status Register-2 | 35h | (S15-S8) ⁽²⁾ | | | | |
| Write Status Register-2 | 31h | (S15-S8) | | | | |
| Read Status Register-3 | 15h | (S23-S16) ⁽²⁾ | | | | |
| Write Status Register-3 | 11h | (S23-S16) | | | | |
| Chip Erase | C7h/60h | | | | | |
| Erase/Program Suspend | 75h | | | | | |
| Erase/Program Resume | 7Ah | | | | | |
| Power-down | B9h | | | | | |
| Release Power-down / ID | ABh | Dummy | Dummy | Dummy | (ID7-ID0) ⁽²⁾ | |
| Manufacturer/Device ID | 90h | Dummy | Dummy | 00h | (MF7-MF0) | (ID7-ID0) ⁽²⁾ |
| JEDEC ID | 9Fh | (MF7-MF0) | (ID15-ID8) | (ID7-ID0) ⁽²⁾ | | |
| Enter QPI Mode | 38h | | | | | |
| Enable Reset | 66h | | | | | |
| Reset Device | 99h | | | | | |
| Read Serial Flash Discoverable Parameter | 5Ah | A23-A16 | A15-A8 | A7-A0 | Dummy | (D7-D0) Next bytes |
| Instruction Name | Byte 1 | Byte 2 | Byte 3 | Byte 4 | Byte 5 | Byte 6 ~ Byte 21 |
| Read Unique ID | 4Bh | Dummy | Dummy | Dummy | Dummy | (UID127-UID0) |

Instruction Set Table 2 (Standard/Dual/Quad SPI Instructions)⁽¹⁾

| Instruction Name | Byte 1 | Byte 2 | Byte 3 | Byte 4 | Byte 5 | Byte 6 | Byte 7 | Byte 8 | Byte 9 |
|--|--------|------------------------|-----------------------|----------------------|-------------------------|--------------------------|------------------------|--------------------------|--------------------------|
| Page Program | 02h | A23-A16 | A15-A8 | A7-A0 | D7-D0 ⁽³⁾ | Next bytes | | | |
| Quad Page Program | 32h | A23-A16 | A15-A8 | A7-A0 | D7-D0 ⁽³⁾⁽⁹⁾ | Next bytes | | | |
| Sector Erase (4KB) | 20h | A23-A16 | A15-A8 | A7-A0 | | | | | |
| Block Erase (32KB) | 52h | A23-A16 | A15-A8 | A7-A0 | | | | | |
| Block Erase (64KB) | D8h | A23-A16 | A15-A8 | A7-A0 | | | | | |
| Read Data | 03h | A23-A16 | A15-A8 | A7-A0 | (D7-D0) | (D7-D0) | Next bytes | | |
| Fast Read | 0Bh | A23-A16 | A15-A8 | A7-A0 | Dummy | (D7-D0) | Next bytes | | |
| Fast Read Dual Output | 3Bh | A23-A16 | A15-A8 | A7-A0 | Dummy | (D7-D0) ⁽⁷⁾ | Next bytes | | |
| Fast Read Quad Output | 6Bh | A23-A16 | A15-A8 | A7-A0 | Dummy | (D7-D0) ⁽⁹⁾ | Next bytes | | |
| Erase Security Register ⁽⁵⁾ | 44h | A23-A16 | A15-A8 | A7-A0 | | | | | |
| Program Security Register ⁽⁵⁾ | 42h | A23-A16 | A15-A8 | A7-A0 | D7-D0 ⁽³⁾ | Next bytes | | | |
| Read Security Register ⁽⁵⁾ | 48h | A23-A16 | A15-A8 | A7-A0 | Dummy | (D7-D0) | Next bytes | | |
| Fast Read Dual I/O | BBh | A23-A16 ⁽⁶⁾ | A15-A8 ⁽⁶⁾ | A7-A0 ⁽⁶⁾ | M7-M0 ⁽⁶⁾ | (D7-D0) ⁽⁷⁾ | | | |
| Mftr./Device ID Dual I/O | 92h | A23-A16 ⁽⁶⁾ | A15-A8 ⁽⁶⁾ | A7-A0 ⁽⁶⁾ | M7-M0 ⁽⁶⁾ | (MF7-MF0) ⁽⁷⁾ | (D7-D0) ⁽⁷⁾ | | |
| Set Burst with Wrap | 77h | Dummy | Dummy | Dummy | W8-W0 | | | | |
| Fast Read Quad I/O ⁽¹⁰⁾ | EBh | A23-A16 ⁽⁸⁾ | A15-A8 ⁽⁸⁾ | A7-A0 ⁽⁸⁾ | M7-M0 ⁽⁸⁾ | Dummy | Dummy | (D7-D0) ⁽⁹⁾ | Next byte |
| Word Read Quad I/O ^{(11) (12)} | E7h | A23-A16 ⁽⁸⁾ | A15-A8 ⁽⁸⁾ | A7-A0 ⁽⁸⁾ | M7-M0 ⁽⁸⁾ | Dummy | (D7-D0) ⁽⁹⁾ | Next bytes | |
| Mftr./Device ID Quad I/O | 94h | A23-A16 ⁽⁸⁾ | A15-A8 ⁽⁸⁾ | A7-A0 ⁽⁸⁾ | M7-M0 ⁽⁸⁾ | Dummy | Dummy | (MF7-MF0) ⁽⁹⁾ | (ID7-ID0) ⁽⁹⁾ |

Instruction Set Table 3 (QPI Instructions)⁽¹⁴⁾

| Instruction Name | Byte 1 | Byte 2 | Byte 3 | Byte 4 | Byte 5 | Byte 6 |
|---|---------|--------------------------|---------------------------|--------------------------|--------------------------|--------------------------|
| Write Enable | 06h | | | | | |
| Volatile SR Write Enable | 50h | | | | | |
| Write Disable | 04h | | | | | |
| Read Status Register-1 | 05h | (S7-S0) ⁽²⁾ | | | | |
| Write Status Register-1 ⁽⁴⁾ | 01h | (S7-S0) ⁽⁴⁾ | | | | |
| Read Status Register-2 | 35h | (S15-S8) ⁽²⁾ | | | | |
| Write Status Register-2 | 31h | (S15-S8) | | | | |
| Read Status Register-3 | 15h | (S23-S16) ⁽²⁾ | | | | |
| Write Status Register-3 | 11h | (S23-S16) | | | | |
| Chip Erase | C7h/60h | | | | | |
| Erase/Program Suspend | 75h | | | | | |
| Erase/Program Resume | 7Ah | | | | | |
| Power-down | B9h | | | | | |
| Set Read Parameters | C0h | P7-P0 | | | | |
| Release Powerdown / ID | ABh | Dummy | Dummy | Dummy | (ID7-ID0) ⁽²⁾ | |
| Manufacturer/Device ID | 90h | Dummy | Dummy | 00h | (MF7-MF0) ⁽²⁾ | (ID7-ID0) ⁽²⁾ |
| JEDEC ID | 9Fh | (MF7-MF0) ⁽²⁾ | (ID15-ID8) ⁽²⁾ | (ID7-ID0) ⁽²⁾ | | |
| Exit QPI Mode | FFh | | | | | |
| Enable Reset | 66h | | | | | |
| Reset Device | 99h | | | | | |
| Page Program | 02h | A23-A16 | A15-A8 | A7-A0 | D7-D0 ⁽³⁾⁽⁹⁾ | Next bytes |
| Sector Erase (4KB) | 20h | A23-A16 | A15-A8 | A7-A0 | | |
| Block Erase (32KB) | 52h | A23-A16 | A15-A8 | A7-A0 | | |
| Block Erase (64KB) | D8h | A23-A16 | A15-A8 | A7-A0 | | |
| Fast Read | 0Bh | A23-A16 | A15-A8 | A7-A0 | Dummy ⁽¹⁵⁾ | (D7-D0) |
| Burst Read with Wrap ⁽¹⁶⁾ | 0Ch | A23-A16 | A15-A8 | A7-A0 | Dummy ⁽¹⁵⁾ | (D7-D0) |
| Fast Read Quad I/O | EBh | A23-A16 | A15-A8 | A7-A0 | M7-M0 ⁽¹⁵⁾ | (D7-D0) |
| Read Serial Flash Discoverable Parameter | 5Ah | A23-A16 | A15-A8 | A7-A0 | Dummy | (D7-D0) |
| Read Security Registers ⁽⁵⁾ | 48h | A23-A16(8) | A15-A8(8) | A7-A0(8) | Dummy | D7-D0 |
| Erase Security Registers ⁽⁵⁾ | 44h | A31-A24 | A23-A16(8) | A15-A8(8) | A7-A0(8) | |
| Program Security Registers ⁽⁵⁾ | 42h | A23-A16(8) | A15-A8(8) | A7-A0(8) | D7-D0 | Next Byte |
| Read Serial Flash Discoverable Parameter | 5Ah | A23-A16 | A15-A8 | A7-A0 | Dummy | (D7-D0) |

Notes:

- Data bytes are shifted with Most Significant Bit first. Byte fields with data in parenthesis “()” indicate data output from the device on 1, 2 or 4 IO pins.
- The Status Register contents, and Device ID will repeat continuously until /CS terminates the instruction.
- At least one byte of data input is required for Page Program, Quad Page Program and Program Security Registers, up to 256 bytes of data input. If more than 256 bytes of data are sent to the device, the addressing will wrap to the beginning of the page and overwrite previously sent data.
- Write Status Register-1 (01h) can also be used to program Status Register-1&2, see [section 7.1.5](#).
- Security Register Address:

| | | | |
|---------------------|--------------|-------------|---------------------|
| Security Register 1 | A23-16 = 00h | A15-8 = 10h | A7-0 = byte address |
| Security Register 2 | A23-16 = 00h | A15-8 = 20h | A7-0 = byte address |
| Security Register 3 | A23-16 = 00h | A15-8 = 30h | A7-0 = byte address |

- Dual SPI address input format:
 IO0 = A22, A20, A18, A16, A14, A12, A10, A8, A6, A4, A2, A0, M6, M4, M2, M0
 IO1 = A23, A21, A19, A17, A15, A13, A11, A9, A7, A5, A3, A1, M7, M5, M3, M1

7. Dual SPI data output format:
 IO0 = (D6, D4, D2, D0)
 IO1 = (D7, D5, D3, D1)
8. Quad SPI address input format:
 IO0 = A20, A16, A12, A8, A4, A0, M4, M0
 IO1 = A21, A17, A13, A9, A5, A1, M5, M1
 IO2 = A22, A18, A14, A10, A6, A2, M6, M2
 IO3 = A23, A19, A15, A11, A7, A3, M7, M3
9. Quad SPI data input/output format:
 IO0 = (D4, D0,)
 IO1 = (D5, D1,)
 IO2 = (D6, D2,)
 IO3 = (D7, D3,)
10. Fast Read Quad I/O data output format:
 IO0 = (x, x, x, x, D4, D0, D4, D0)
 IO1 = (x, x, x, x, D5, D1, D5, D1)
 IO2 = (x, x, x, x, D6, D2, D6, D2)
 IO3 = (x, x, x, x, D7, D3, D7, D3)
11. Word Read Quad I/O data output format:
 IO0 = (x, x, D4, D0, D4, D0, D4, D0)
 IO1 = (x, x, D5, D1, D5, D1, D5, D1)
 IO2 = (x, x, D6, D2, D6, D2, D6, D2)
 IO3 = (x, x, D7, D3, D7, D3, D7, D3)
12. For Word Read Quad I/O, the lowest address bit must be 0. (A0 = 0)
13. QPI Command, Address, Data input/output format:

| <i>CLK #</i> | <i>0</i> | <i>1</i> | <i>2</i> | <i>3</i> | <i>4</i> | <i>5</i> | <i>6</i> | <i>7</i> | <i>8</i> | <i>9</i> | <i>10</i> | <i>11</i> |
|--------------|----------|----------|-----------|----------|-----------|----------|----------|----------|----------|----------|-----------|-----------|
| IO0 = | C4, C0, | | A20, A16, | | A12, A8, | | A4, A0, | | D4, D0, | | D4, D0 | |
| IO1 = | C5, C1, | | A21, A17, | | A13, A9, | | A5, A1, | | D5, D1, | | D5, D1 | |
| IO2 = | C6, C2, | | A22, A18, | | A14, A10, | | A6, A2, | | D6, D2, | | D6, D2 | |
| IO3 = | C7, C3, | | A23, A19, | | A15, A11, | | A7, A3, | | D7, D3, | | D7, D3 | |
14. The number of dummy clocks for QPI Fast Read, QPI Fast Read Quad I/O & QPI Burst Read with Wrap is controlled by read parameter P7 – P4.
15. The wrap around length for QPI Burst Read with Wrap is controlled by read parameter P3 – P0.

Table 10. Instructions that need to send the Write Enable/Write Enable for Volatile Status Register instruction

| Instruction | | Write |
|----------------------------|-------------|---------|
| Write Status Register | 01h/31h/11h | 06H/50H |
| Erase Security Registers | 44h | 06H |
| Program Security Registers | 42h | 06H |
| Page Program | 02h | 06H |
| Quad Page Program | 32h | 06H |
| Sector Erase | 20h | 06H |
| 32KB Block Erase | 52h | 06H |
| 64KB Block Erase | D8h | 06H |
| Chip Erase | 60h/C7h | 06H |

7.1 Configuration and Status Instructions

7.1.1 Write Enable (06H)

See **Figure 5-Figure 6**, the Write Enable instruction is for setting the Write Enable Latch bit. The Write Enable Latch bit must be set prior to every Write Status Register, Program, Erase. The Write Enable instruction sequence: /CS goes low sending the Write Enable instruction, /CS goes high.

Please note that the Write Enable instruction sent when the Write Enable for Volatile Status Register instruction is valid is not accepted. Therefore, when need to send the Write Enable instruction, but do not know if the Write Enable for Volatile Status Register instruction is valid, please send the Write Disable instruction first.

Figure 5. Write Enable Sequence Diagram (SPI Mode)


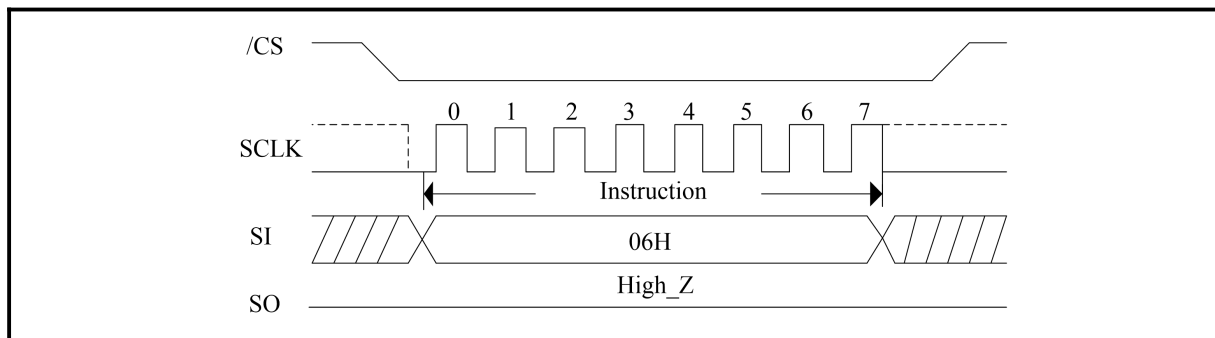


Figure 6. Write Enable Sequence Diagram (QPI Mode)

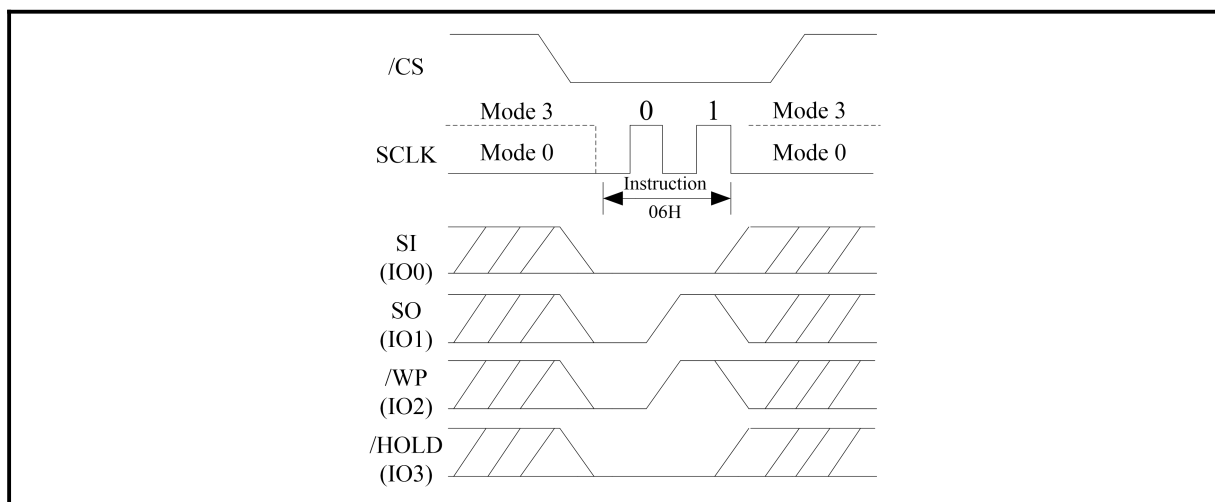

7.1.2 Write Enable for Volatile Status Register (50H)

See **Figure 7-Figure 8**, the non-volatile Status Register bits can also be written to as volatile bits (DC, HOLD/RST, DRV1, DRV0, CMP, QE, SRP1, SRP0, BP4, BP3, BP2, BP1, BP0). This gives more flexibility to change the system configuration and memory protection schemes quickly without waiting for the typical non-volatile bit write cycles or affecting the endurance of the Status Register non-volatile bits. Write Enable for Volatile Status Register instruction will not set the Write Enable Latch bit, it is only valid for the Write Status Registers instruction to change the volatile Status Register bit values (After the software/hardware reset or re-powered, the volatile Status Register bit values will be restored to the default value or the value input by the Write Enable instruction).

Please note that the Write Enable for Volatile Status Register instruction sent when the Write Enable instruction is valid is not accepted. Therefore, when need to send the Write Enable for Volatile Status Register instruction, please first determine whether the Write Enable instruction is not valid.

Figure 7. Write Enable for Volatile Status Register (SPI Mode)


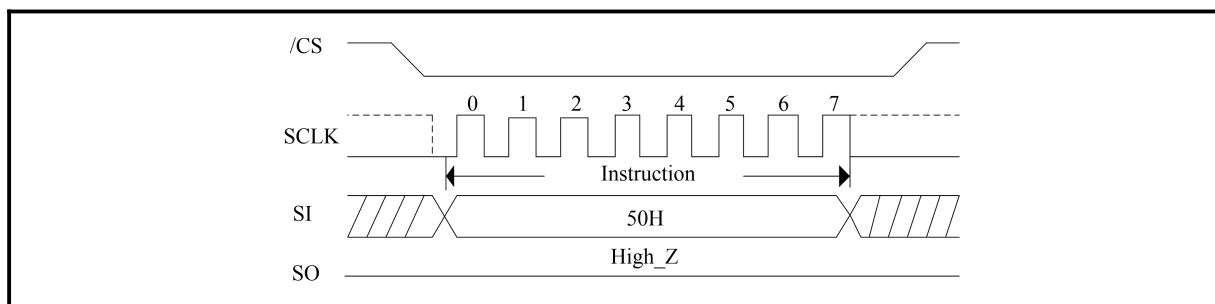


Figure 8. Write Enable for Volatile Status Register (QPI Mode)

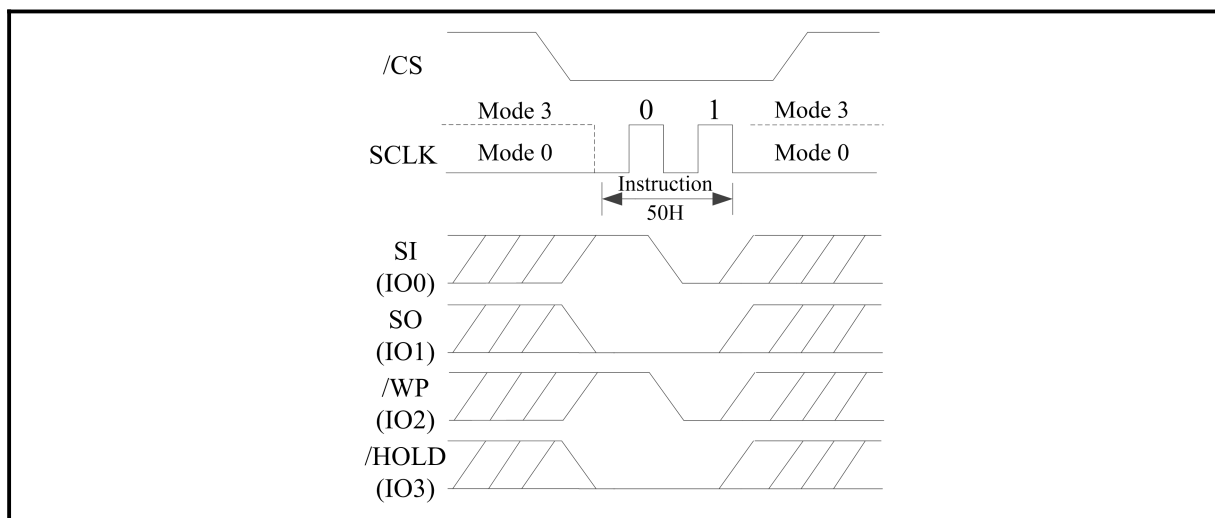

7.1.3 Write Disable (04H)

See **Figure 9-Figure 10**, the Write Disable instruction is for resetting the Write Enable Latch bit or invalidate the Write Enable for Volatile Status Register instruction. The Write Disable instruction sequence: /CS goes low -> sending the Write Disable instruction -> /CS goes high. The WEL bit is reset by following condition: Power-up and upon completion of the Write Status Register, Page Program, Sector Erase, Block Erase and Chip Erase, Program/Erase Security Registers and Reset instructions.

Figure 9. Write Disable Sequence Diagram (SPI Mode)


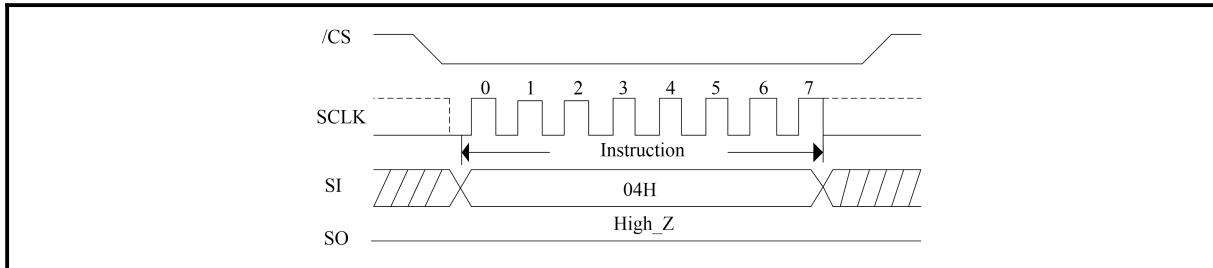


Figure 10. Write Disable Sequence Diagram (QPI Mode)

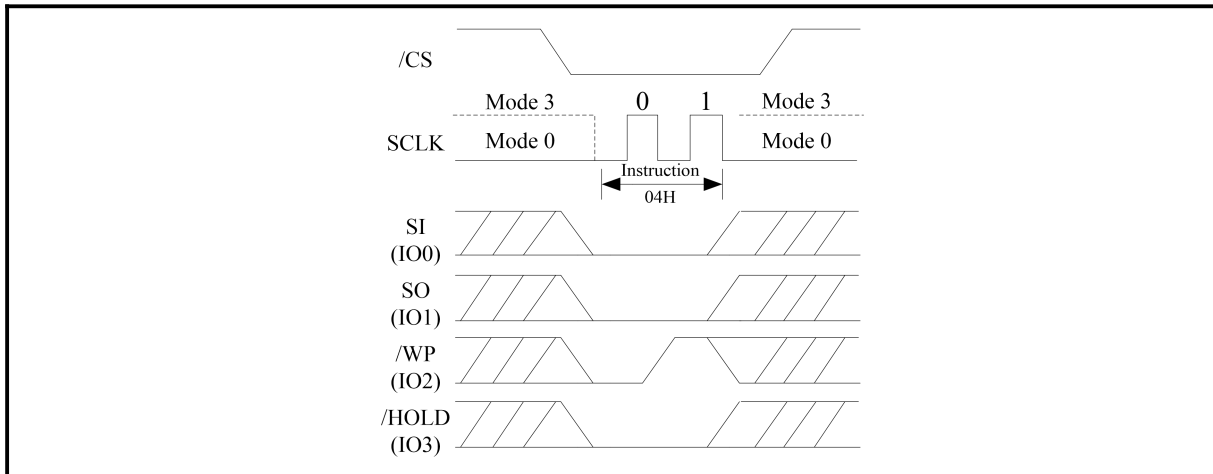

7.1.4 Read Status Register (05H or 35H or 15H)

See **Figure 11-Figure 12**, the Read Status Register instruction is for reading the Status Register. The Status Register may be read at any time, even while a Program, Erase or Write Status Register cycle is in progress. When one of these cycles is in progress, it is recommended to check the Write in Progress (WIP) bit before sending a new instruction to the device. It is also possible to read the Status Register continuously. For instruction code “05H”, the SO will output Status Register bits S7~S0. The instruction code “35H”, the SO will output Status Register bits S15~S8, The instruction code “15H”, the SO will output Status Register bits S23~16.

Figure 11. Read Status Register Sequence Diagram (SPI Mode)


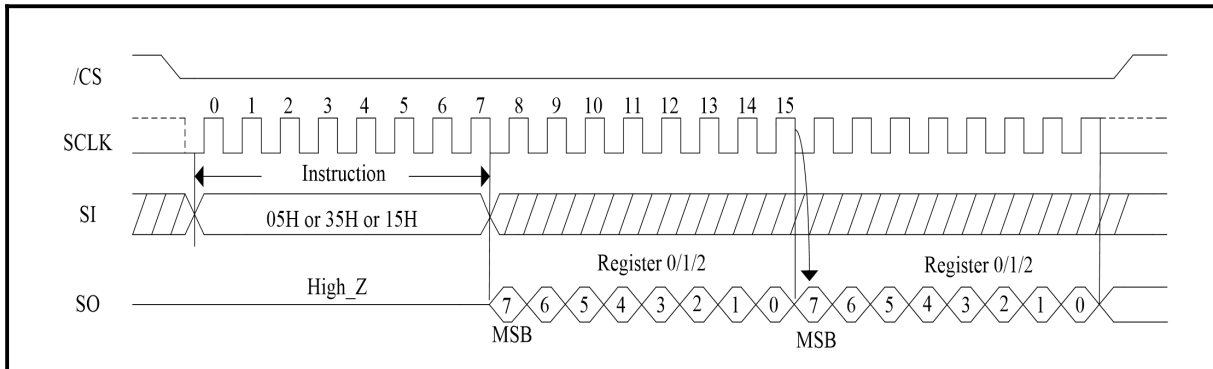


Figure 12. Read Status Register Sequence Diagram (QPI Mode)

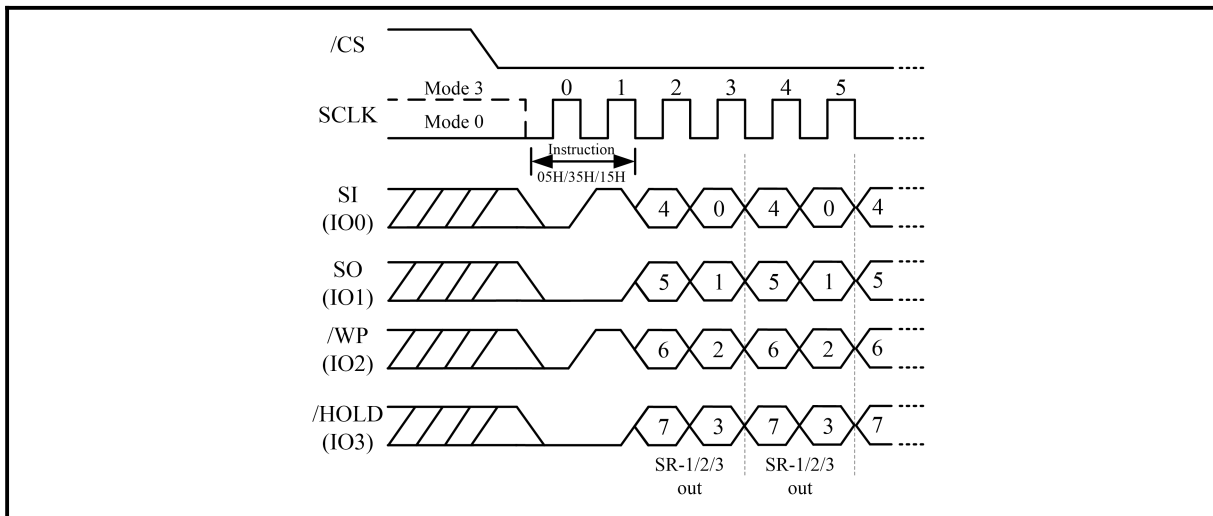

7.1.5 Write Status Register (01H or 31H or 11H)

The Write Status Register instruction allows the Status Registers to be written. The Status Register-1 can be written by the Write Status Register 01h instruction; The Status Register-2 be written by the Write Status Register 01h or 31h instruction; Status Register-3 can be written by the Write Status Register 11h instruction. When the Write Status Register instruction 01h is followed by 1 byte data, the data will be written to Status Register-1. When the Write Status Register instruction 01h is followed by 2 bytes of data, the first byte data will be written to Status Register-1, and the second byte data will be written to Status Register-2; And Write Status Register instruction 31h or 11h can only follow 1 byte data, the data will be written to Status Register-2、 Status Register-3 respectively. The writable Status Register bits include: SRP0, BP[4:0] in Status Register-1; CMP, LB[3:1], QE, SRP1 in Status Register- 2; DRV1, DRV0, Hold/RST, DC in Status Register- 3. All other Status Register bit locations are read-only and will not be affected by the Write Status Register instruction. LB[3:1] are non-volatile OTP bits, once it is set to 1, it cannot be cleared to 0.

The Write Status Register instruction allows new values to be written to the Status Register. Before it can be accepted, a Write Enable or Write Enable For Volatile SR instruction must previously have been executed After the Write Enable instruction has been decoded and executed, the device sets the Write Enable Latch (WEL).

The Write Status Register instruction has no effect on S15 (SUS1), S10 (SUS2), S1 (WEL) and S0 (WIP) of the Status Register. /CS must be driven high after the 8 or 16 bit of the data byte has been latched in. If not, the Write Status Register (WRSR) instruction is not executed. As soon as /CS is driven high, the self-timed Write Status Register cycle (whose duration is tW) is initiated. While the Write Status Register cycle is in progress, the Status Register may still be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Write Status Register cycle, and is 0 when it is completed. When the cycle is completed, the Write Enable Latch (WEL) is reset.

The Write Status Register instruction allows the user to change the values of the Block Protect (BP4, BP3, BP2, BP1, and BP0) bits, to define the size of the area. The Write Status Register (WRSR) instruction also allows the user to set or reset the Status Register Protect (SRP1 and SRP0) bits in accordance with the Write Protect (/WP) signal. The Status Register Protect (SRP1 and SRP0) bits and Write Protect (/WP) signal allow the device to be put in the Hardware Protected Mode. The Write Status Register instruction is not executed once the Hardware Protected Mode is entered.

The sequence of issuing WRSR instruction is: /CS goes low→ sending WRSR instruction code→ Status Register data on SI→/CS goes high.

The /CS must go high exactly at the 8 bits or 16 bits data boundary; otherwise, the instruction will be rejected and not executed. The self-timed Write Status Register cycle time (tW) is initiated as soon as Chip Select (/CS) goes high. The Write in Progress (WIP) bit still can be checked during the Write Status Register cycle is in progress. The WIP is set 1 during the tW timing and is set 0 when Write Status Register Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

Figure 13. Write Status Register Sequence Diagram-01H 2byte (SPI Mode)

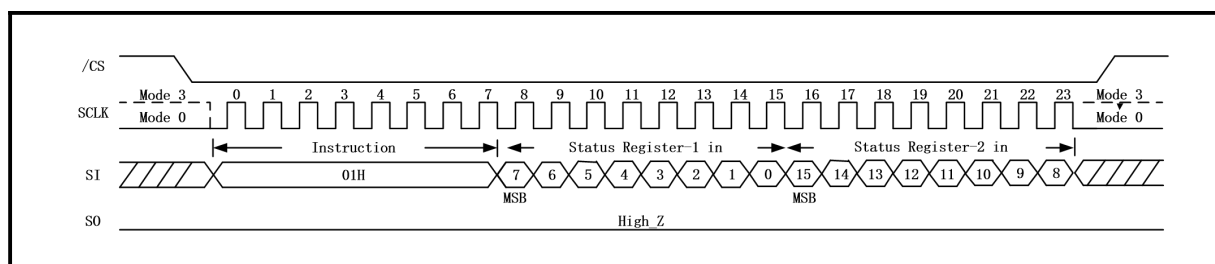
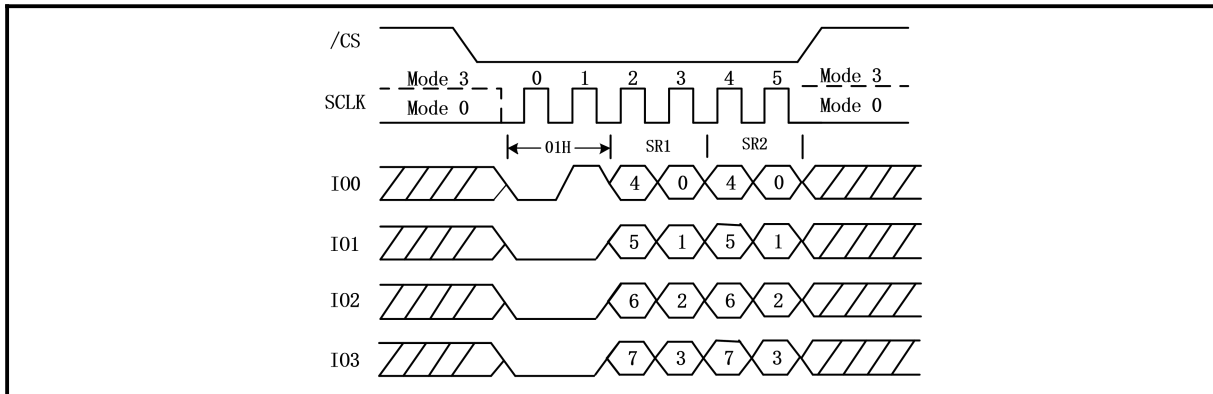
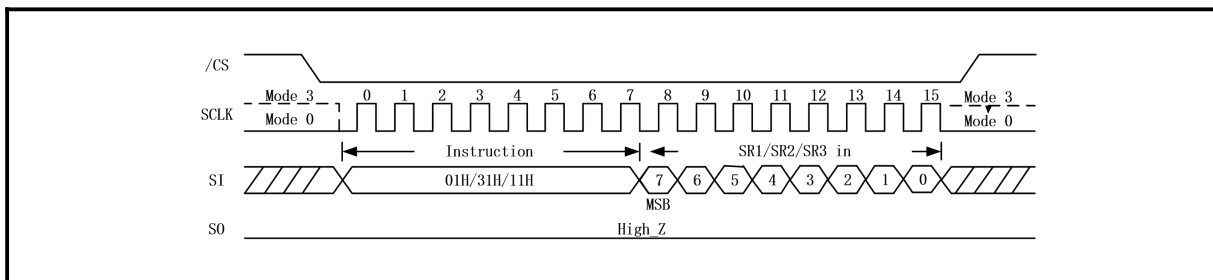
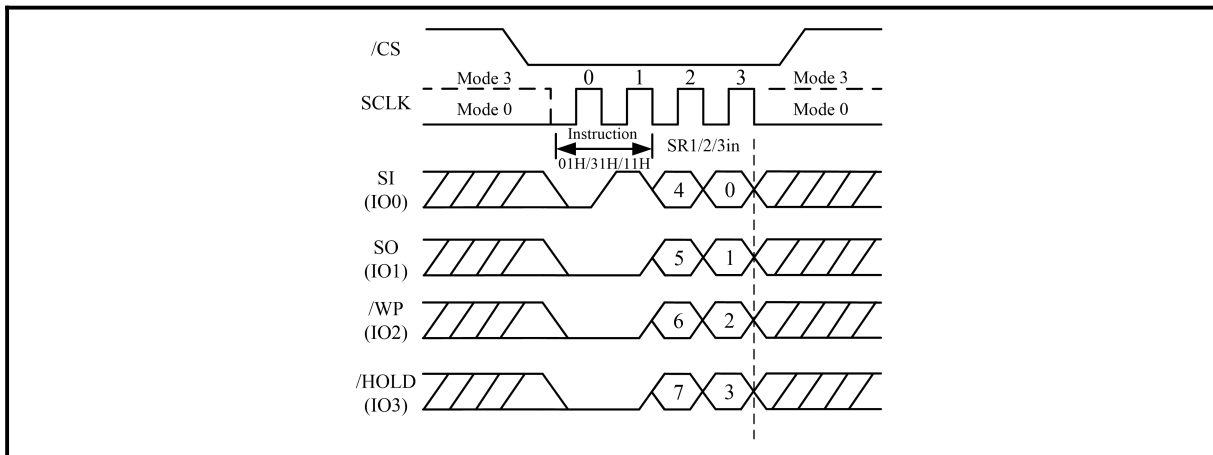


Figure 14. Write Status Register Sequence Diagram-01H 2byte (QPI Mode)

Figure 15. Write Status Register Sequence Diagram-01/31/11H 1byte (SPI Mode)

Figure 16. Write Status Register Sequence Diagram-01/31/11H 1byte (QPI Mode)


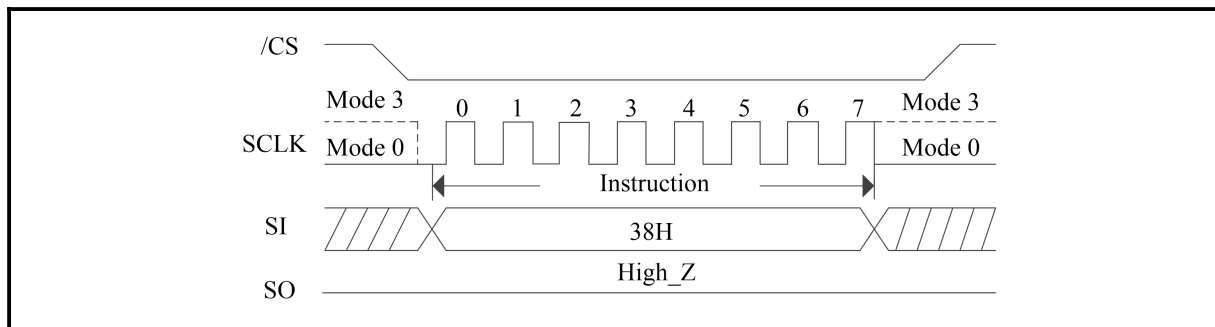
7.1.6 Enter QPI Mode (38H)

The BY25FQ128EL support both Standard/Dual/Quad Serial Peripheral Interface (SPI) and Quad Peripheral Interface (QPI). However, SPI mode and QPI mode cannot be used at the same time. “Enter QPI (38h)” instruction is the only way to switch the device from SPI mode to QPI mode.

Upon power-up, the default state of the device upon is Standard/Dual/Quad SPI mode. This provides full backward compatibility with earlier generations of BY Technology serial flash memories. See Instruction Set **Table 9** for all supported SPI instructions. In order to switch the device to QPI mode, the Quad Enable (QE) bit in Status Register-2 must be set to 1 first, and an “Enter QPI (38h)” instruction must be issued. If the Quad Enable (QE) bit is 0, the “Enter QPI (38h)” instruction will be ignored, and the device will remain in SPI mode.

When the device is switched from SPI mode to QPI mode, the existing Write Enable and Program/Erase Suspend status, and the Wrap Length setting will remain unchanged.

Figure 17. Enter QPI Mode (SPI Mode)




7.1.7 Exit QPI Mode (FFH)

In order to exit the QPI mode and return to the Standard/Dual/Quad SPI mode, an “Exit QPI (FFh)” instruction must be issued.

When the device is switched from QPI mode to SPI mode, the existing Write Enable Latch (WEL) and Program/Erase Suspend status, and the Wrap Length setting will remain unchanged.

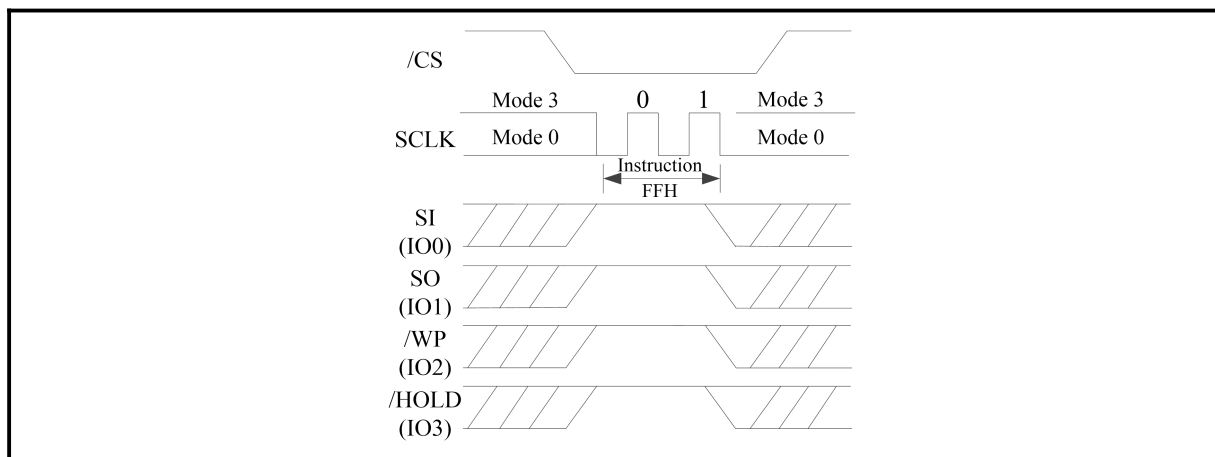Figure 18. Exit QPI Mode (QPI Mode)



7.1.8 Enable Reset (66H) and Reset Device (99H)

Because of the small package and the limitation on the number of pins, the BY25FQ128EL provides a software reset instruction instead of a dedicated RESET pin. Once the software reset instruction is accepted, any on-going internal operations will be terminated and the device will return to its default power-on state and lose all the current volatile settings, such as Volatile Status Register bits, Write Enable Latch (WEL) status, Program/Erase Suspend status, Continuous Read Mode bit setting (M7-M0) and Wrap Bit setting (W6-W4).

To avoid accidental reset, both “Enable Reset (66h)” and “Reset (99h)” instructions must be issued in sequence. Any other instructions other than “Reset (99h)” after the “Enable Reset (66h)” instruction will disable the “Reset Enable” state. A new sequence of “Enable Reset (66h)” and “Reset (99h)” is needed to reset the device. Once the Reset instruction is accepted by the device, the device will take approximately t_{RST} to reset. During this period, no instruction will be accepted.

The Enable Reset (66h) and Reset (99h) instruction sequence is shown in **Figure 19-Figure 20**.

Data corruption may happen if there is an on-going or suspended internal Erase or Program operation when Reset instruction sequence is accepted by the device. It is recommended to check the BUSY bit and the SUS bit in Status Register before issuing the Reset instruction sequence.

Figure 19. Enable Reset (66h) and Reset (99h) Instruction Sequence (SPI Mode)


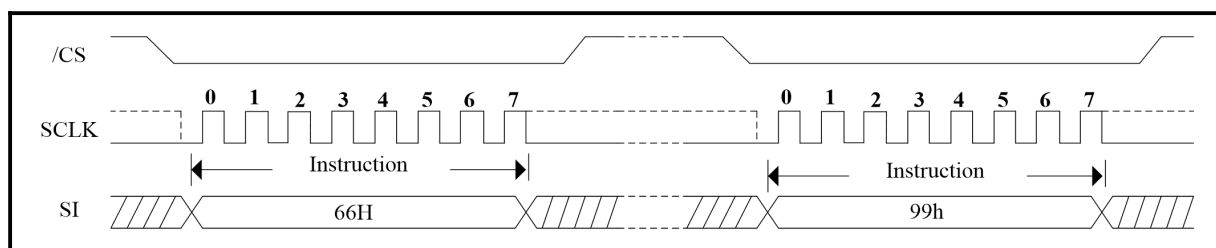


Figure 20. Enable Reset (66h) and Reset (99h) Instruction Sequence (QPI Mode)

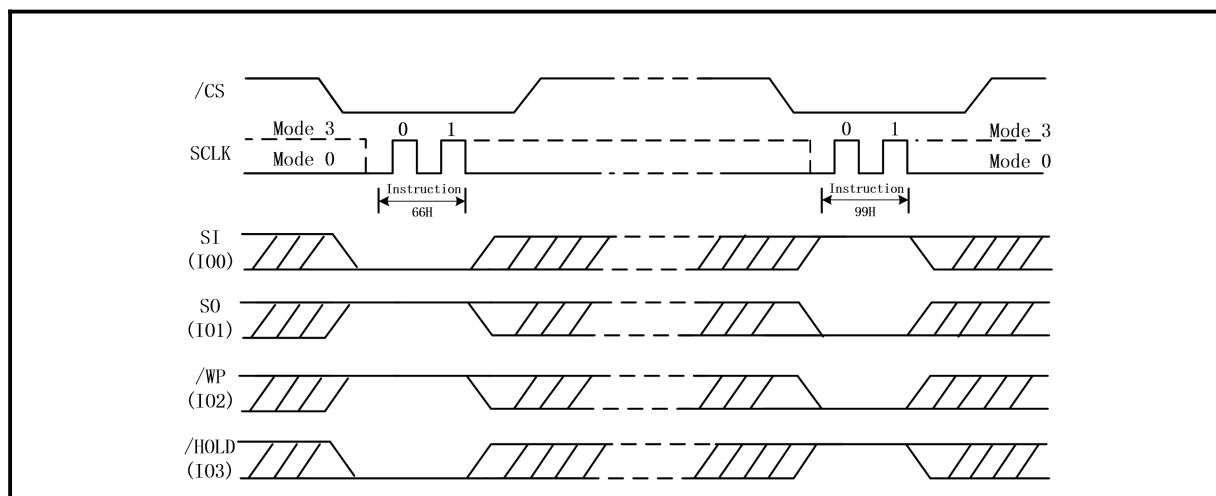


7.2 Read Instructions

7.2.1 Read Data (03H)

See **Figure 21**, the Read Data Bytes (READ) instruction is followed by a 3-byte address (A23-A0), each bit being latched-in during the rising edge of SCLK. Then the memory content, at that address, is shifted out on SO, each bit being shifted out, at a Max frequency f_R, during the falling edge of SCLK. The address is automatically incremented to the next higher address after each byte of data is shifted out allowing for a continuous stream of data. This means that the entire memory can be accessed with a single instruction as long as the clock continues. The instruction is completed by driving /CS high. The whole memory can be read with a single Read Data Bytes (READ) instruction. Any Read Data Bytes (READ) instruction, while an Erase, Program or Write cycle is in progress, is rejected without having any effects on the cycle that is in progress.

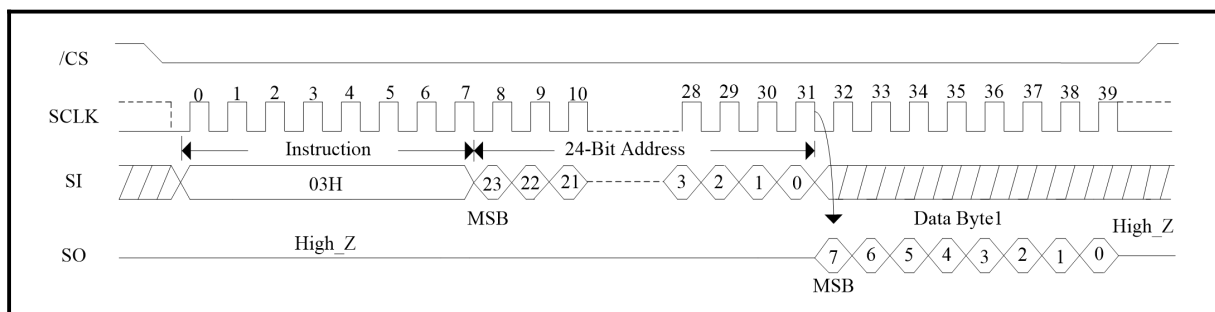
Figure 21. Read Data Bytes Sequence Diagram (SPI Mode only)



7.2.2 Fast Read (0BH)

See **Figure 22**, the Read Data Bytes at Higher Speed (Fast Read) instruction is for quickly reading data out. It is followed by a 3-byte address (A23-A0) and a dummy byte, each bit being latched-in during the rising edge of SCLK. Then the memory content, at that address, is shifted out on SO, each bit being shifted out, at a Max frequency f_c , during the falling edge of SCLK. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out.

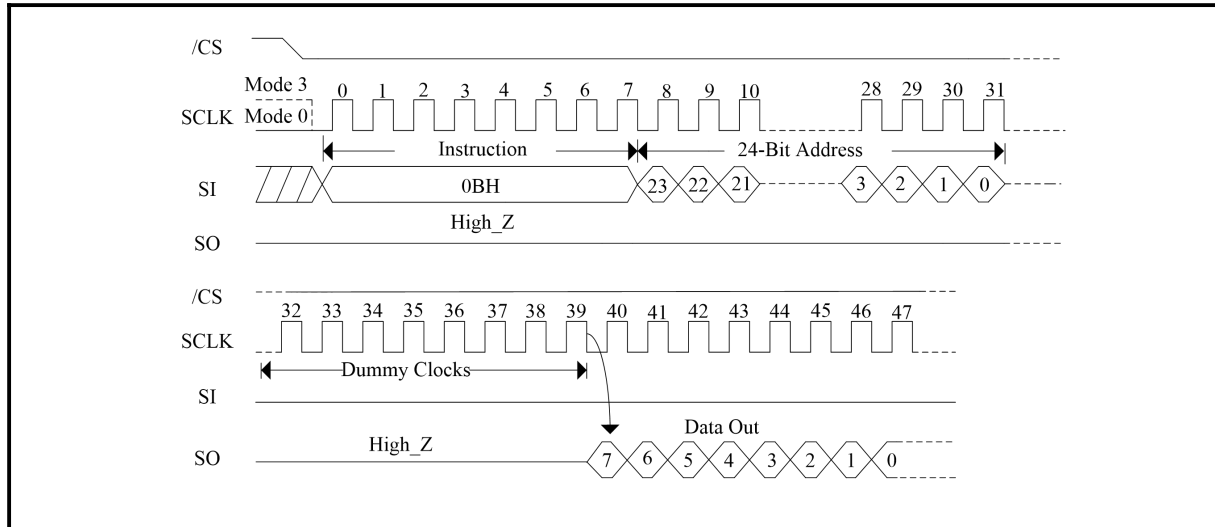
Figure 22. Fast Read Sequence Diagram (SPI Mode)



Fast Read (0Bh) in QPI Mode

The Fast Read instruction is also supported in QPI mode. When QPI mode is enabled, the number of dummy clocks is configured by the “Set Read Parameters (C0h)” instruction to accommodate a wide range of applications with different needs for either maximum Fast Read frequency or minimum data access latency. Depending on the Read Parameter Bits P[5:4] setting, the number of dummy clocks can be configured as either 4, 6, 8 or 10. The default number of dummy clocks upon power up or after a Reset instruction is 4.

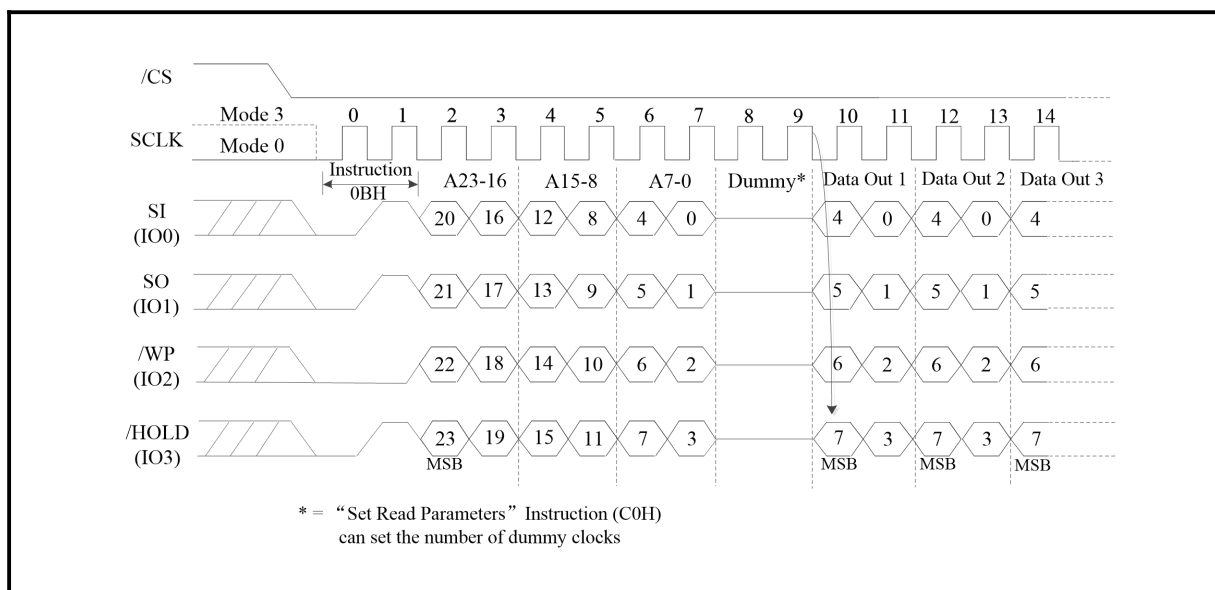
Figure 23. Fast Read Sequence Diagram (QPI Mode Mode)



7.2.3 Dual Output Fast Read (3BH)

See **Figure 24**, the Dual Output Fast Read instruction is followed by 3-byte address (A23-A0) and a dummy byte, each bit being latched in during the rising edge of SCLK, then the memory contents are shifted out 2-bit per clock cycle from SI and SO. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out.

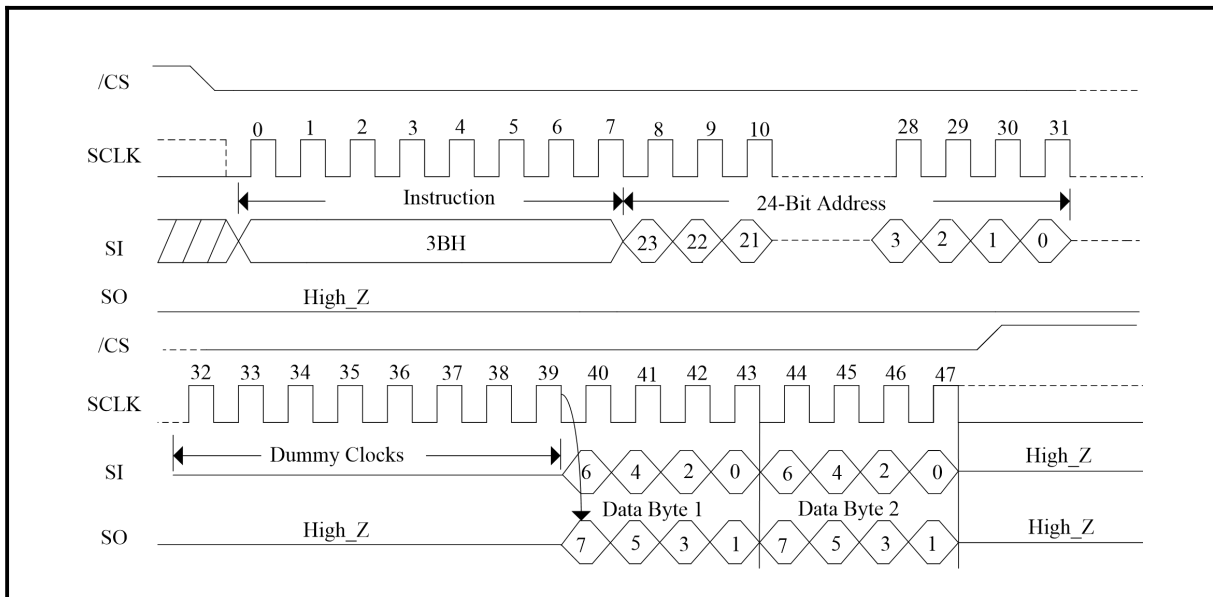
Figure 24. Dual Output Fast Read Sequence Diagram (SPI Mode only)



7.2.4 Quad Output Fast Read (6BH)

See **Figure 25**, the Quad Output Fast Read instruction is followed by 3-byte address (A23-A0) and a dummy byte, each bit being latched in during the rising edge of SCLK, then the memory contents are shifted out 4-bit per clock cycle from IO3, IO2, IO1 and IO0. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. The Quad Enable bit (QE) of Status Register must be set to enable.

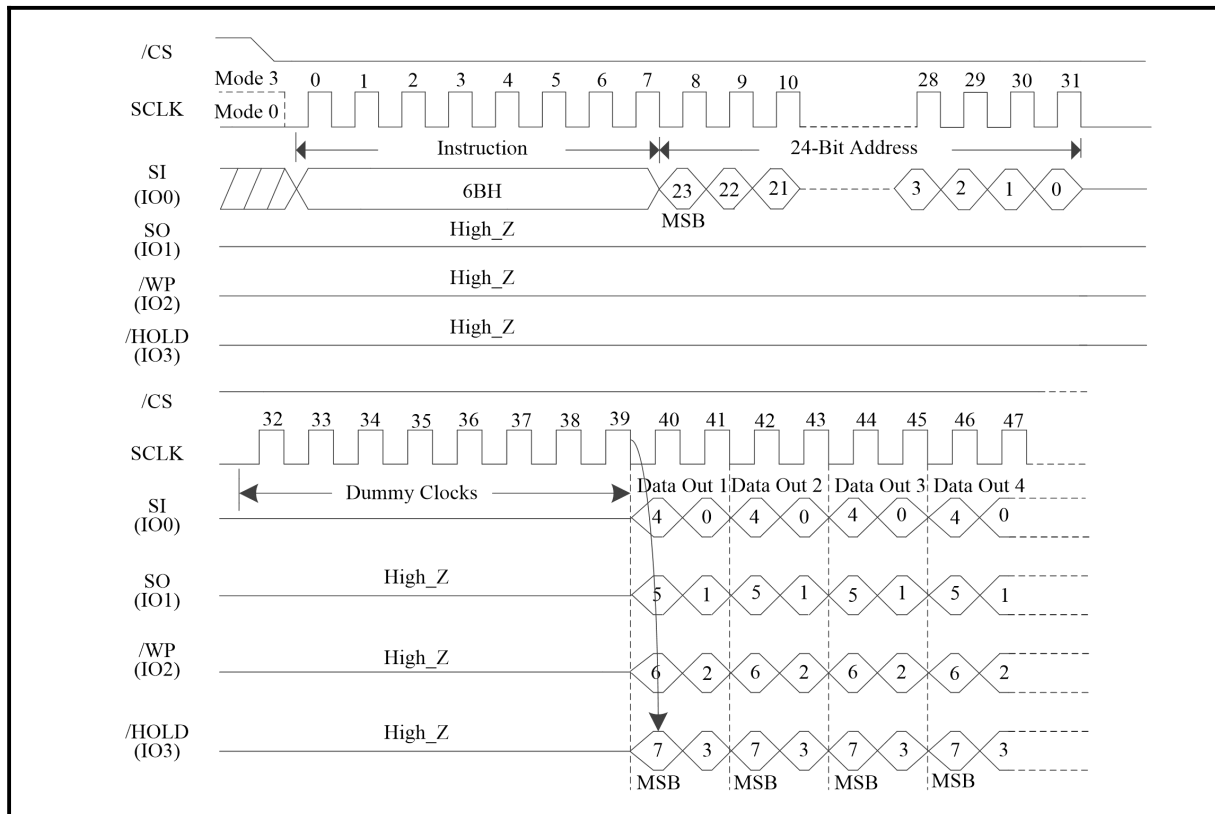Figure 25. Quad Output Fast Read Sequence Diagram (SPI Mode only)



7.2.5 Dual I/O Fast Read (BBH)

See **Figure 26**, the Dual I/O Fast Read instruction is similar to the Dual Output Fast Read instruction but with the capability to input the 3-byte address (A23-0) and a “Continuous Read Mode” byte 2-bit per clock by SI and SO, each bit being latched in during the rising edge of SCLK, then the memory contents are shifted out 2-bit per clock cycle from SI and SO. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out.

Dual I/O Fast Read with “continuous Read Mode”

The Dual I/O Fast Read instruction can further reduce instruction overhead through setting the “continuous Read Mode” bits (M7-4) after the inputs 3-byte address A23-A0). If the “continuous Read Mode” bits (M5-4)=(1,0), then the next Dual I/O fast Read instruction (after CS/ is raised and then lowered) does not require the BBH instruction code. The instruction sequence is shown in the following **Figure 26**. If the “continuous Read Mode” bits (M5-4) does not equal (1,0), the next instruction requires the first BBH instruction code, thus returning to normal operation. A “continuous Read Mode” Reset instruction can be used to reset (M5-4) before issuing normal instruction.

Figure 26. Dual I/O Fast Read Sequence Diagram (Initial instruction or previous (M5-4) ≠ (1,0) , SPI Mode only)


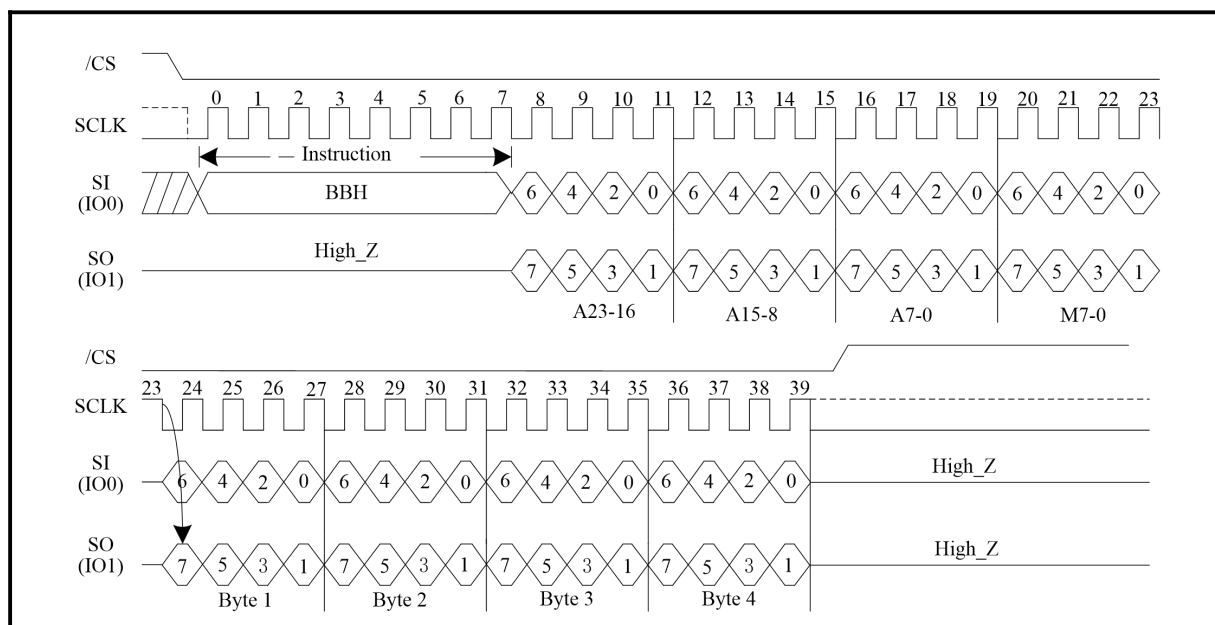


Figure 27. Dual I/O Fast Read Sequence Diagram (Previous instruction set (M5-4) =(1,0) , SPI Mode only)

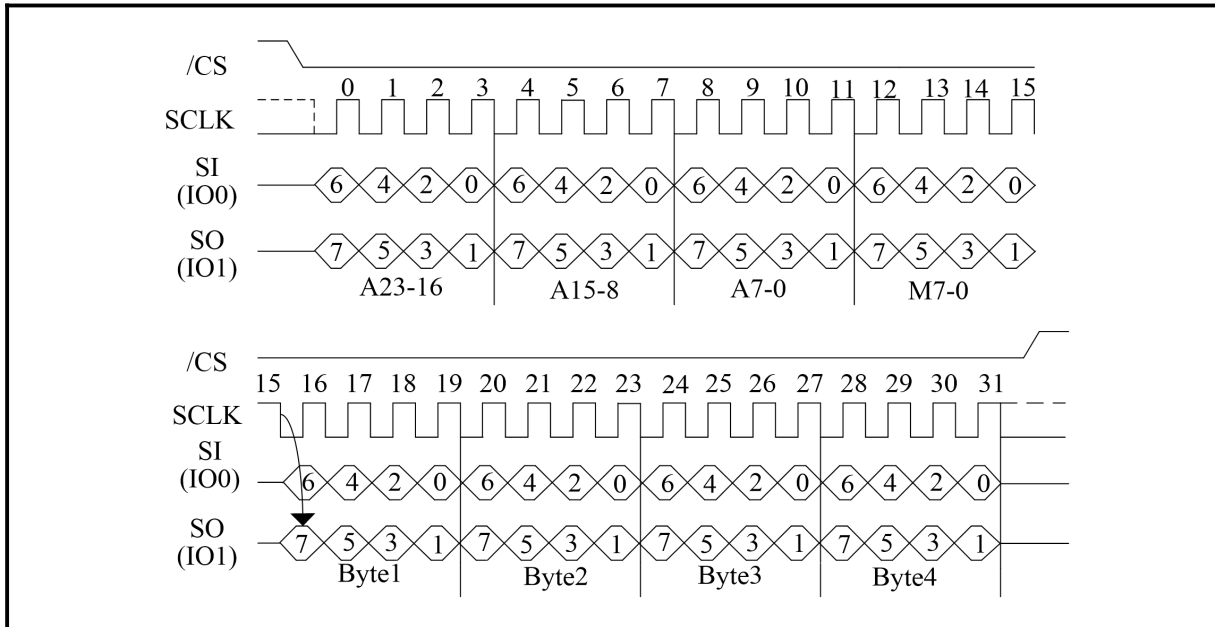

7.2.6 Quad I/O Fast Read (EBH)

See **Figure 28-Figure 29**, the Quad I/O Fast Read instruction is similar to the Dual I/O Fast Read instruction but with the capability to input the 3-byte address (A23-0) and a “Continuous Read Mode” byte and 4-dummy clock 4-bit per clock by IO0, IO1, IO3, IO4, each bit being latched in during the rising edge of SCLK, then the memory contents are shifted out 4-bit per clock cycle from IO0, IO1, IO2, IO3. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. The Quad Enable bit (QE) of Status Register must be set to enable for the Quad I/O Fast read instruction.

Quad I/O Fast Read with “Continuous Read Mode”

The Quad I/O Fast Read instruction can further reduce instruction overhead through setting the “Continuous Read Mode” bits (M7-0) after the input Address bits (A23-0). If the “Continuous Read Mode” bits (M5-4) = (1,0), then the next Fast Read Quad I/O instruction(after /CS is raised and then lowered) does not require the EBH instruction code. If the “Continuous Read Mode” bits M5-4 do not equal to (1,0), the next instruction requires the first EBH instruction code, thus returning to normal operation. A “Continuous Read Mode” Reset instruction can also be used to reset (M5-4) before issuing normal instruction.

Figure 28. Quad I/O Fast Read Sequence Diagram (SPI Mode; Initial instruction or previous (M5-4 ≠ (1,0)))


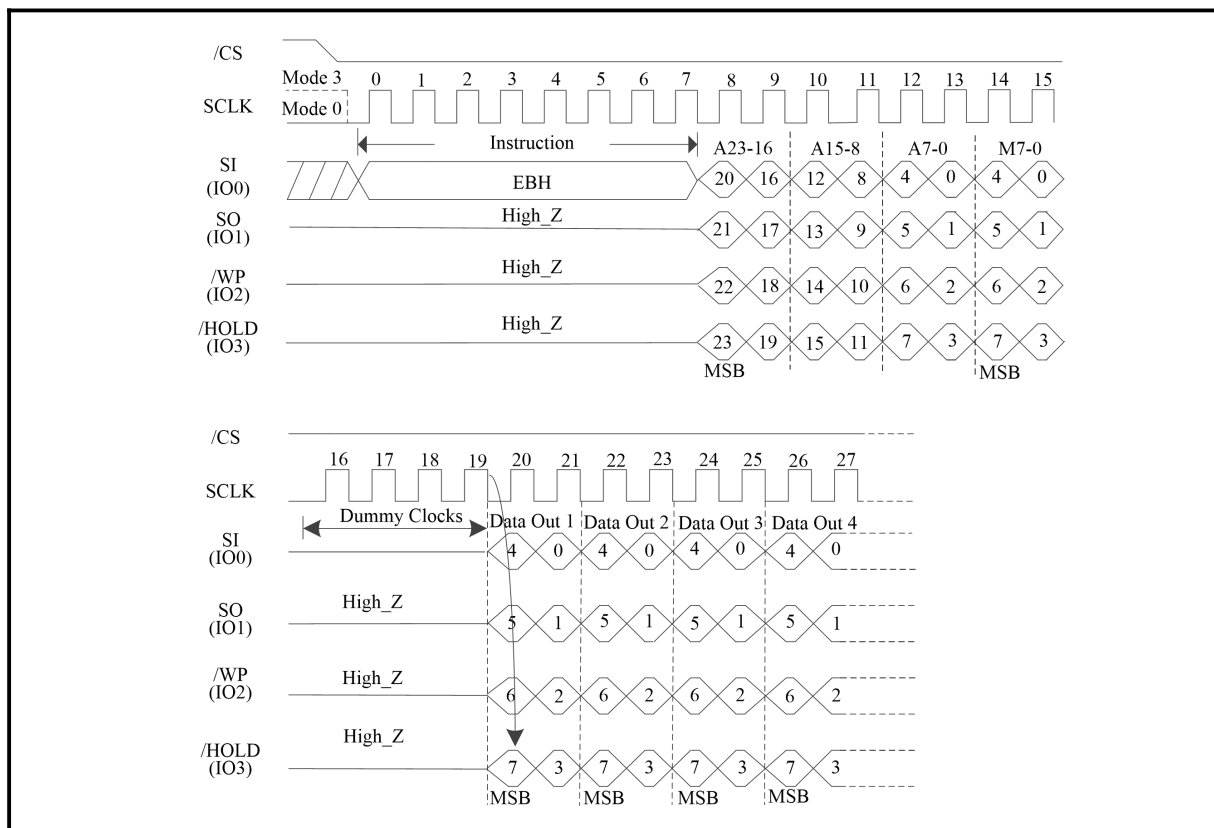


Figure 29. Quad I/O Fast Read Sequence Diagram (SPI Mode; Initial instruction or previous (M5-4=(1,0)))

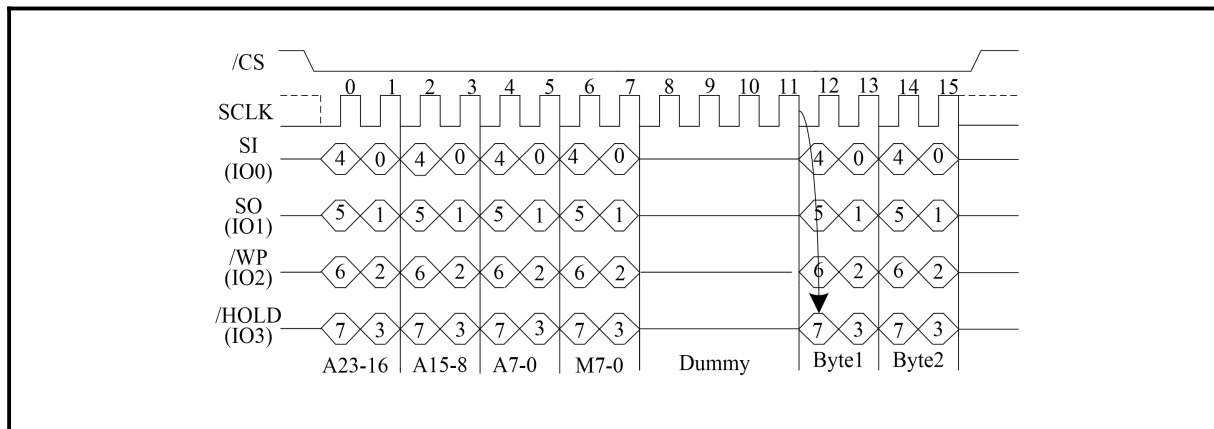

Quad I/O Fast Read with “8/16/32/64-Byte Wrap Around”

The Quad I/O Fast Read instruction can also be used to access a specific portion within a page by issuing a “Set Burst with Wrap” (77H) instruction prior to EBH. The “Set Burst with Wrap” (77H) instruction can either enable or disable the “Wrap Around” feature for the following EBH instructions. When “Wrap Around” is enabled, the data being accessed can be limited to either an 8, 16, 32 or 64-byte section of a 256-byte page. The output data starts at the initial address specified in the instruction, once it reaches the ending boundary of the 8/16/32/64-byte section, the output will wrap around to the beginning boundary automatically until /CS is pulled high to terminate the instruction.

The Burst with Wrap feature allows applications that use cache to quickly fetch a critical address and then fill the cache afterwards within a fixed length (8/16/32/64-byte) of data without issuing multiple read instructions.

The “Set Burst with Wrap” instruction allows three “Wrap Bits”, W6-4 to be set. The W4 bit is used to enable or disable the “Wrap Around” operation while W6-5 are used to specify the length of the wrap around section within a page.

Fast Read Quad I/O (EBh) in QPI Mode

The Fast Read Quad I/O instruction is also supported in QPI mode, as shown in **Figure 30-Figure 31**. When QPI mode is enabled, the number of dummy clocks is configured by the “Set Read Parameters (C0h)” instruction to accommodate a wide range of applications with different needs for either maximum Fast Read frequency or minimum data access latency. Depending on the Read Parameter Bits P[5:4] setting, the number of dummy clocks can be configured as either 4, 6, 8 or 10. The default number of dummy clocks upon power up or after a Reset instruction is 4. In QPI mode, the “Continuous Read Mode” bits M7-0 are also considered as dummy clocks. In the default setting, the data output will follow the Continuous Read Mode bits immediately.

“Continuous Read Mode” feature is also available in QPI mode for Fast Read Quad I/O instruction. Please refer to the description on previous pages.

“Wrap Around” feature is not available in QPI mode for Fast Read Quad I/O instruction. To perform a read operation with fixed data length wrap around in QPI mode, a dedicated “Burst Read with Wrap” (0Ch) instruction must be used.

Figure 30. Quad I/O Fast Read Sequence Diagram (QPI Mode Mode; Initial instruction or previous (M5-4≠(1,0)))


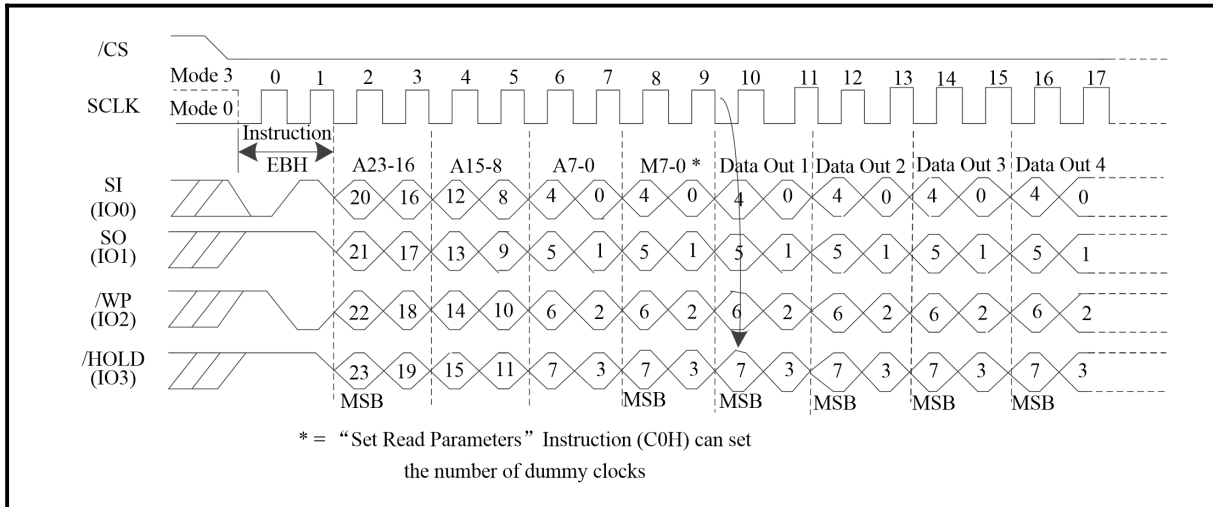


Figure 31. Quad I/O Fast Read Sequence Diagram (QPI Mode Mode; Initial instruction or previous (M5-4=(1,0)))

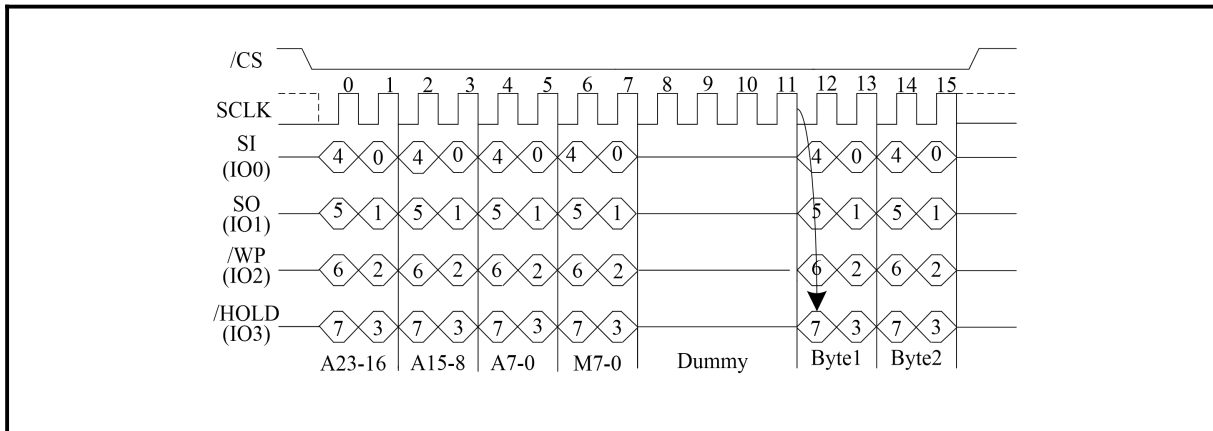

7.2.7 Quad I/O Word Fast Read (E7H)

The Quad I/O Word Fast Read instruction is similar to the Quad Fast Read instruction except that the lowest address bit (A0) must equal 0 and 2-dummy clock. The instruction sequence is shown in the followed **Figure 32-Figure 33**, the first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. The Quad Enable bit (QE) of Status Register (S9) must be set to enable for the Quad I/O Word Fast Read instruction. The Quad Enable bit (QE) of Status Register must be set to enable.

Quad I/O Word Fast Read with “Continuous Read Mode”

The Quad I/O Word Fast Read instruction can further reduce instruction overhead through setting the “Continuous Read Mode” bits (M7-0) after the input 3-byte Address bits (A23-0). If the “Continuous Read Mode” bits (M5-4) = (1, 0), then the next Quad I/O Fast Read instruction (after /CS is raised and then lowered) does not require the E7H instruction code, the instruction sequence is shown in the followed **Figure 33**. If the “Continuous Read Mode” bits M5-4 do not equal to (1,0), the next instruction requires the first E7H instruction code, thus returning to normal operation. A “Continuous Read Mode” Reset instruction can also be used to reset (M5-4) before issuing normal instruction.

Figure 32. Quad I/O Word Fast Read Sequence Diagram (SPI Mode; Initial instruction or previous (M5-4) ≠(1,0))


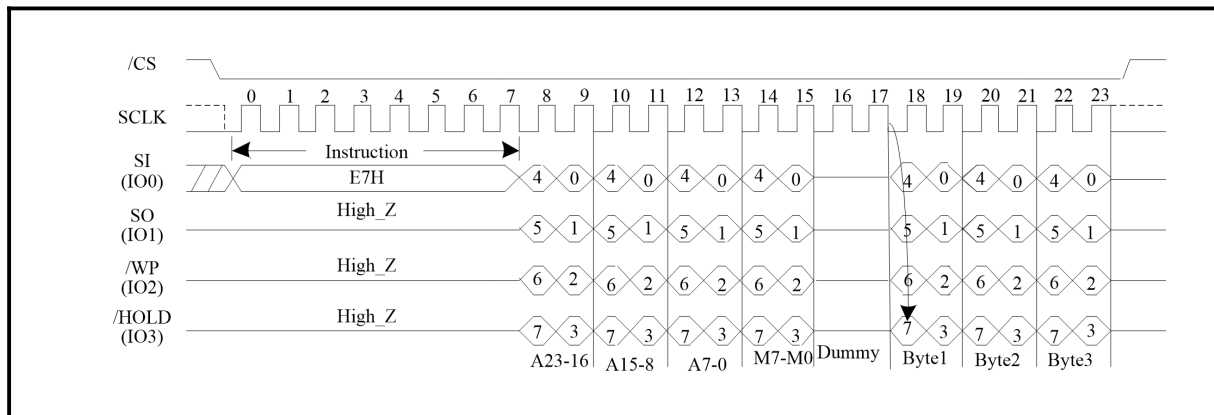


Figure 33. Quad I/O Word Fast Read Sequence Diagram (SPI Mode; Initial instruction or previous (M5-4)=(1,0))

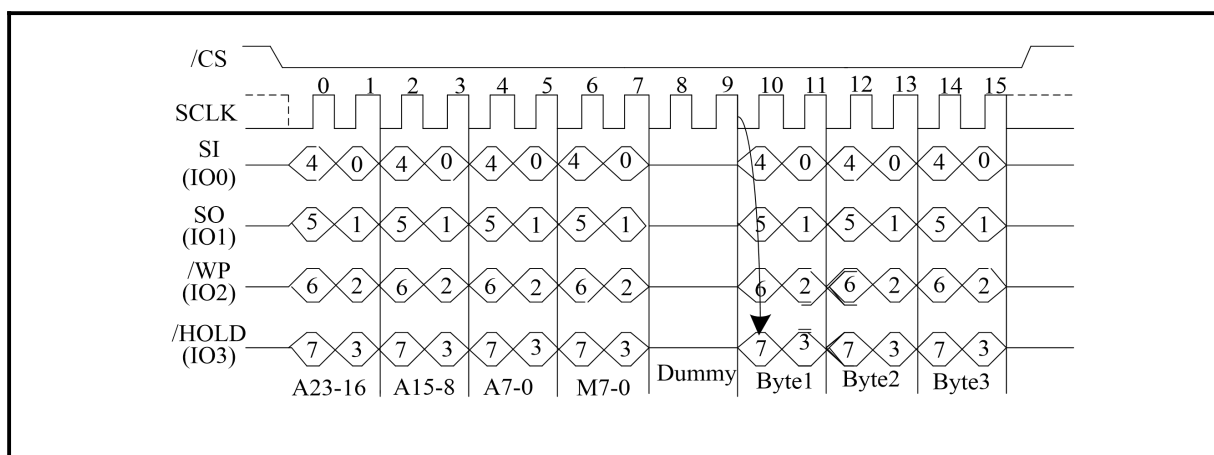

Quad I/O Word Fast Read with “8/16/32/64-Byte Wrap Around” in standard SPI mode

The Quad I/O Fast Read instruction can also be used to access a specific portion within a page by issuing a “Set Burst with Wrap” (77H) instruction prior to E7H. The “Set Burst with Wrap” (77H) instruction can either enable or disable the “Wrap Around” feature for the following E7H instructions. When “Wrap Around” is enabled, the data being accessed can be limited to either an 8, 16, 32 or 64-byte section of a 256-byte page. The output data starts at the initial address specified in the instruction, once it reaches the ending boundary of the 8/16/32/64-byte section, the output will wrap around to the beginning boundary automatically until /CS is pulled high to terminate the instruction.

The Burst with Wrap feature allows applications that use cache to quickly fetch a critical address and then fill the cache afterwards within a fixed length (8/16/32/64-byte) of data without issuing multiple read instructions.

The “Set Burst with Wrap” instruction allows three “Wrap Bits”, W6-4 to be set. The W4 bit is used to enable or disable the “Wrap Around” operation while W6-5 are used to specify the length of the wrap around section within a page.

7.2.8 Set Burst with Wrap (77H)


See **Figure 34**, The Set Burst with Wrap instruction is used in conjunction with “EBH”, “E7H” instructions to access a fixed length of 8/16/32/64-byte section within a 256-byte page, in standard SPI mode.

The Set Burst with Wrap instruction sequence: /CS goes low -> Send Set Burst with Wrap instruction -> Send 24 Dummy bits -> Send 8 bits” Wrap bits” -> /CS goes high.

If W6-4 is set by a Set Burst with Wrap instruction, all the following “EBH”, “E7H” instructions will use the W6-4 setting to access the 8/16/32/64-byte section within any page. To exit the “Wrap Around” function and return to normal read operation, another Set Burst with Wrap instruction should be issued to set W4=1. The default value of W4 upon power on is 1.

| W6 , W5 | W4 = 0 | | W4 =1 (DEFAULT) | |
|---------|-------------|-------------|-----------------|-------------|
| | Wrap Around | Wrap Length | Wrap Around | Wrap Length |
| 0 0 | Yes | 8-byte | No | N/A |
| 0 1 | Yes | 16-byte | No | N/A |
| 1 0 | Yes | 32-byte | No | N/A |
| 1 1 | Yes | 64-byte | No | N/A |

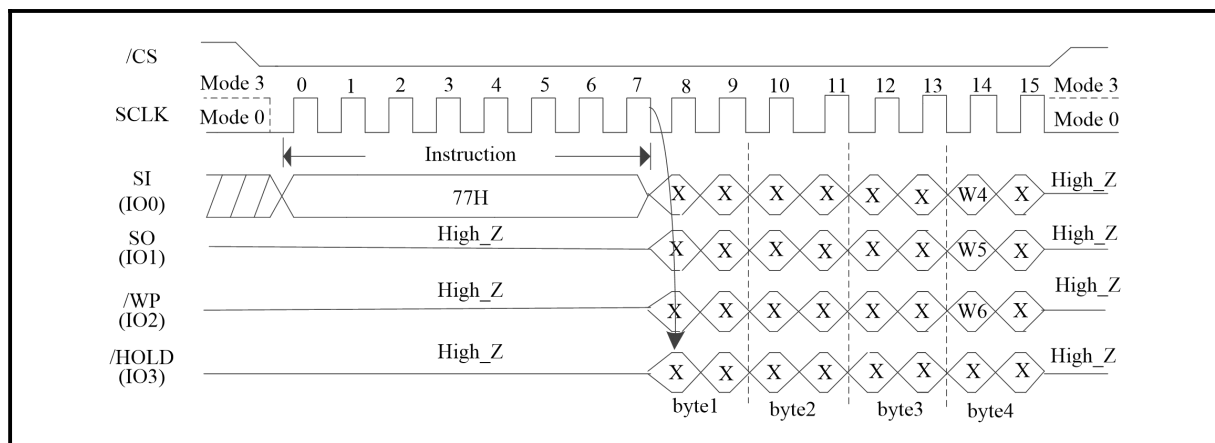Figure 34. Set Burst with Wrap Sequence Diagram (SPI Mode only)



7.2.9 Set Read Parameters (C0H)

In QPI mode, to accommodate a wide range of applications with different needs for either maximum read frequency or minimum data access latency, “Set Read Parameters (C0h)” instruction can be used to configure the number of dummy clocks for “0BH”, “EBH”, “0CH”, “48H” and “5AH” instructions, as shown in **Table 11**, and to configure the number of bytes of “Wrap Length” for the “0CH” instruction.

Table 11. Instructions that configurable dummy number


| Mode | Instruction | |
|------|--|-----|
| QPI | Fast Read | 0Bh |
| | Fast Read Quad I/O | EBh |
| | Burst Read with Wrap | 0Ch |
| | Read Security Registers | 48h |
| | Read Serial Flash Discoverable Parameter | 5Ah |

In Standard SPI mode, the “Set Read Parameters (C0h)” instruction is not accepted. The dummy clocks for various Fast Read instructions in Standard/Dual/Quad SPI mode are fixed, please refer to the Instruction **Table 9** for details. The “Wrap Length” is set by W5-4 bit in the “Set Burst with Wrap (77h)” instruction. This setting will remain unchanged when the device is switched from Standard SPI mode to QPI mode.

The default “Wrap Length” after a power up or a Reset instruction is 8 bytes, the default number of dummy clocks is 4. The number of dummy clocks is only programmable for “0BH”, “EBH”, “0CH”, “48H” and “5AH” instructions in the QPI mode. Whenever the device is switched from SPI mode to QPI mode, the number of dummy clocks should be set again, prior to any “0BH”, “EBH”, “0CH”, “48H” and “5AH” instructions.

| P5 – P4 | | DUMMY CLOCKS | MAXIMUM READ FREQ. | P1 – P0 | | WRAP LENGTH |
|---------|---|--------------|--------------------|---------|---|-------------|
| 0 | 0 | 4 | 80MHz | 0 | 0 | 8-byte |
| 0 | 1 | 6 | 108MHz | 0 | 1 | 16-byte |
| 1 | 0 | 8 | 133MHz | 1 | 0 | 32-byte |
| 1 | 1 | 10 | 133MHz | 1 | 1 | 64-byte |

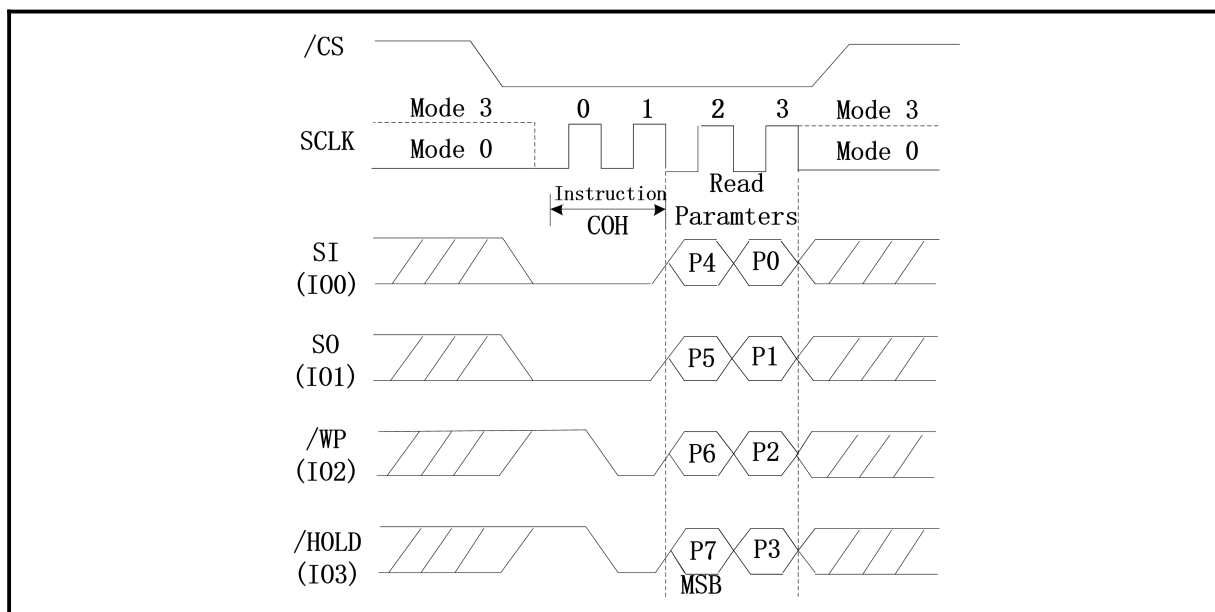Figure 35. Burst Read with Wrap (QPI Mode only)




7.2.10 Burst Read with Wrap (0Ch)

The “Burst Read with Wrap (0Ch)” instruction provides an alternative way to perform the read operation with “Wrap Around” in QPI mode. The instruction is similar to the “Fast Read (0Bh)” instruction in QPI mode, except the addressing of the read operation will “Wrap Around” to the beginning boundary of the “Wrap Length” once the ending boundary is reached.

The “Wrap Length” and the number of dummy clocks can be configured by the “Set Read Parameters (C0h)” instruction

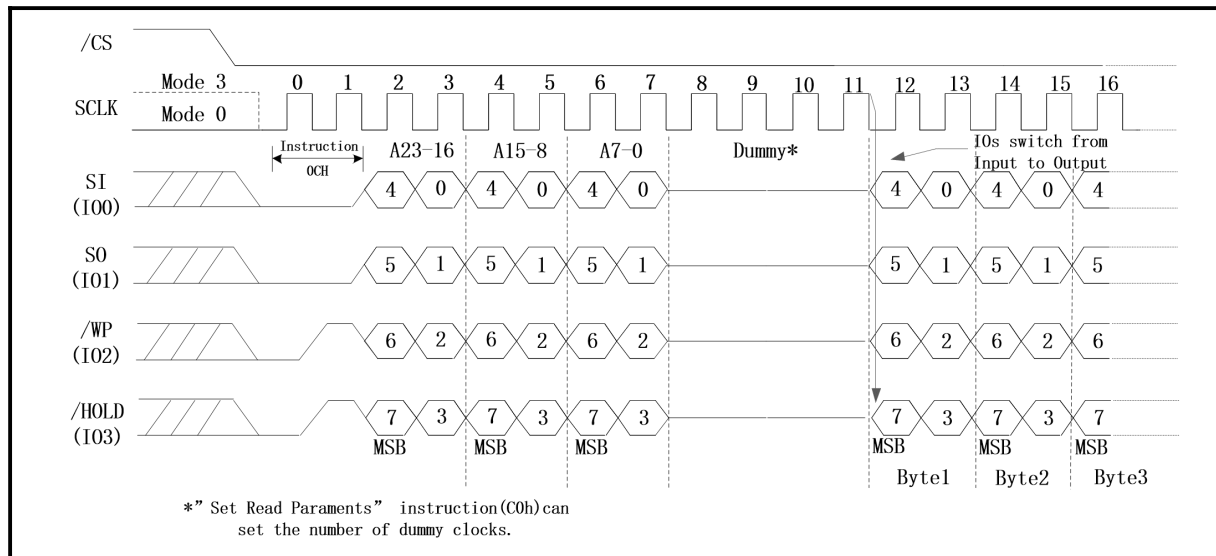Figure 36. Burst Read with Wrap (QPI Mode only)



7.3 ID and Security Instructions

7.3.1 Read Manufacture ID/ Device ID (90H)

See **Figure 37-Figure 38**, The Read Manufacturer/Device ID instruction is an alternative to the Release from Power-Down/Device ID instruction that provides both the JEDEC assigned Manufacturer ID and the specific Device ID.

The instruction is initiated by driving the /CS pin low and shifting the instruction code “90H” followed by a 24-bit address (A23-A0) of 000000H. If the 24-bit address is initially set to 000001H, the Device ID will be read first.

Figure 37. Read Manufacture ID/ Device ID Sequence Diagram (SPI Mode)


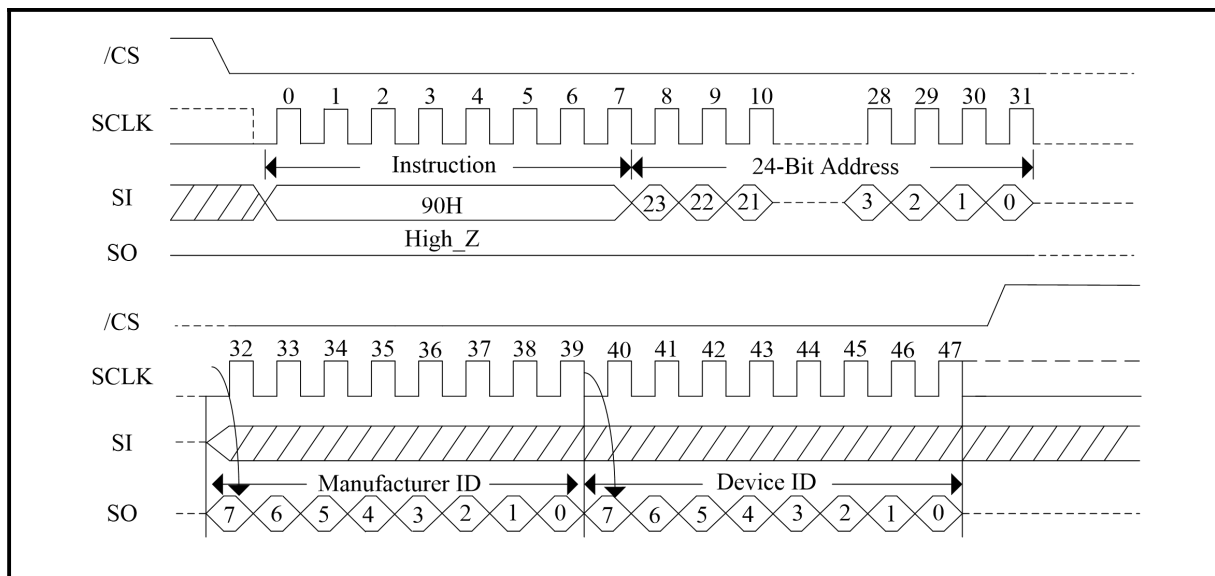


Figure 38. Read Manufacture ID/ Device ID Sequence Diagram (QPI Mode)

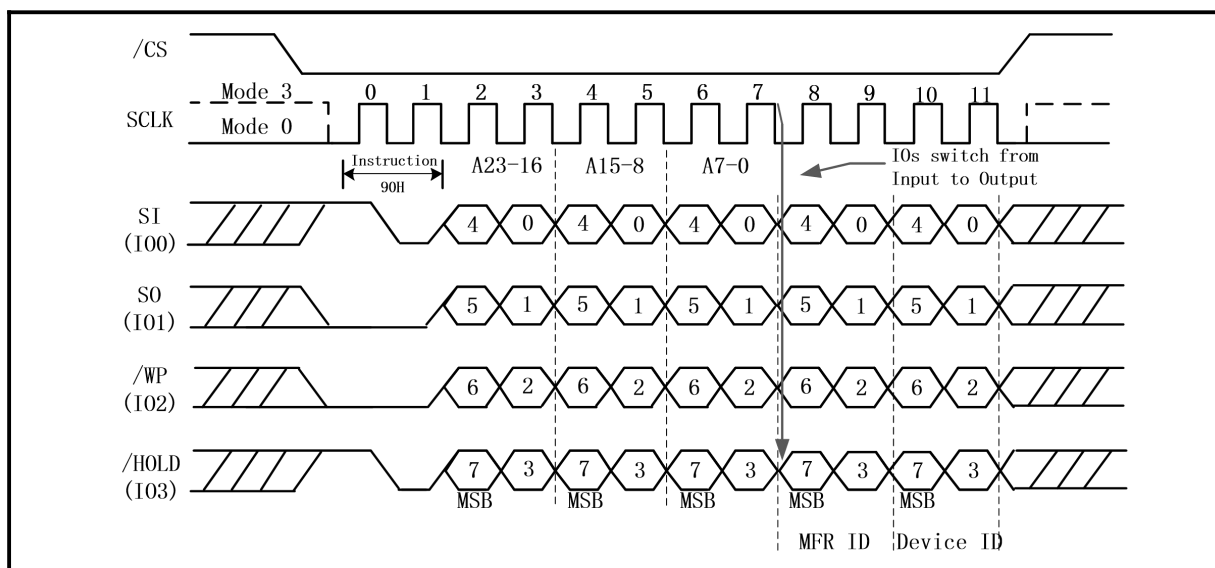


7.3.2 Dual I/O Read Manufacture ID/ Device ID (92H)

See **Figure 39**, the Dual I/O Read Manufacturer/Device ID instruction is an alternative to the Release from Power-Down/Device ID instruction that provides both the JEDEC assigned Manufacturer ID and the specific Device ID by Dual I/O.

The instruction is initiated by driving the /CS pin low and shifting the instruction code “92H” followed by a 24-bit address (A23-A0) of 000000H. If the 24-bit address is initially set to 000001H, the Device ID will be read first.

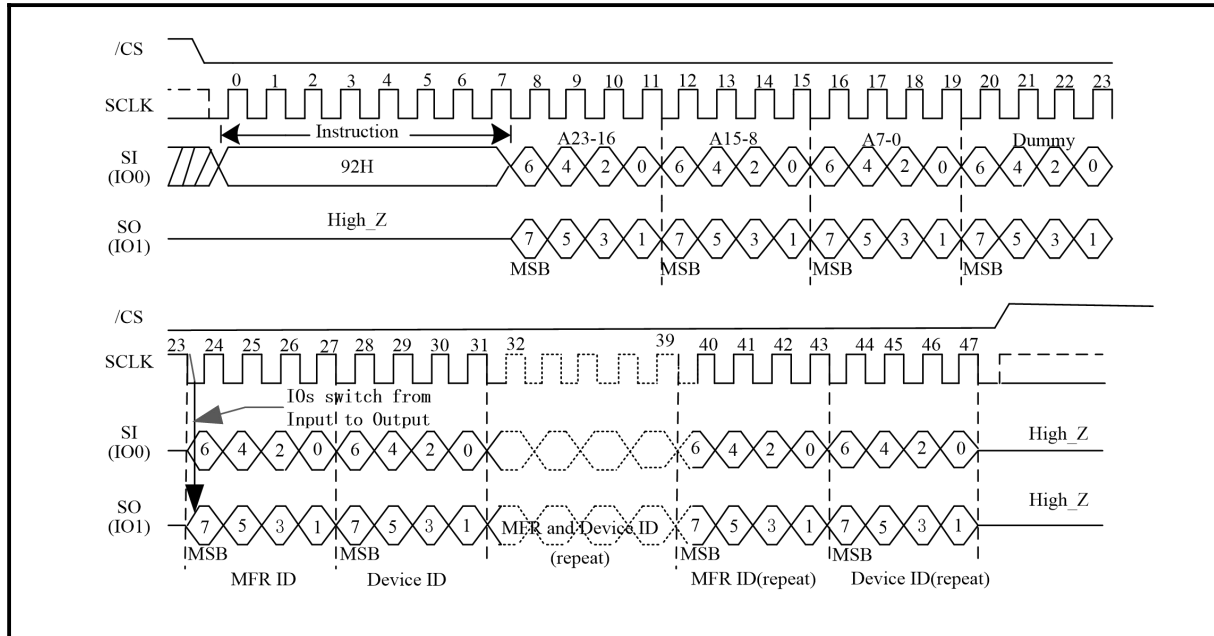Figure 39. Dual I/O Read Manufacture ID/ Device ID Sequence Diagram (SPI Mode)




7.3.3 Quad I/O Read Manufacture ID/ Device ID (94H)

See *Figure 40*, the Quad I/O Read Manufacturer/Device ID instruction is an alternative to the Release from Power-Down/Device ID instruction that provides both the JEDEC assigned Manufacturer ID and the specific Device ID by quad I/O. The Quad Enable bit (QE) of Status Register must be set to enable.

The instruction is initiated by driving the /CS pin low and shifting the instruction code “94H” followed by a 24-bit address (A23-A0) of 000000H and 6 dummy clocks. If the 24-bit address is initially set to 000001H, the Device ID will be read first.

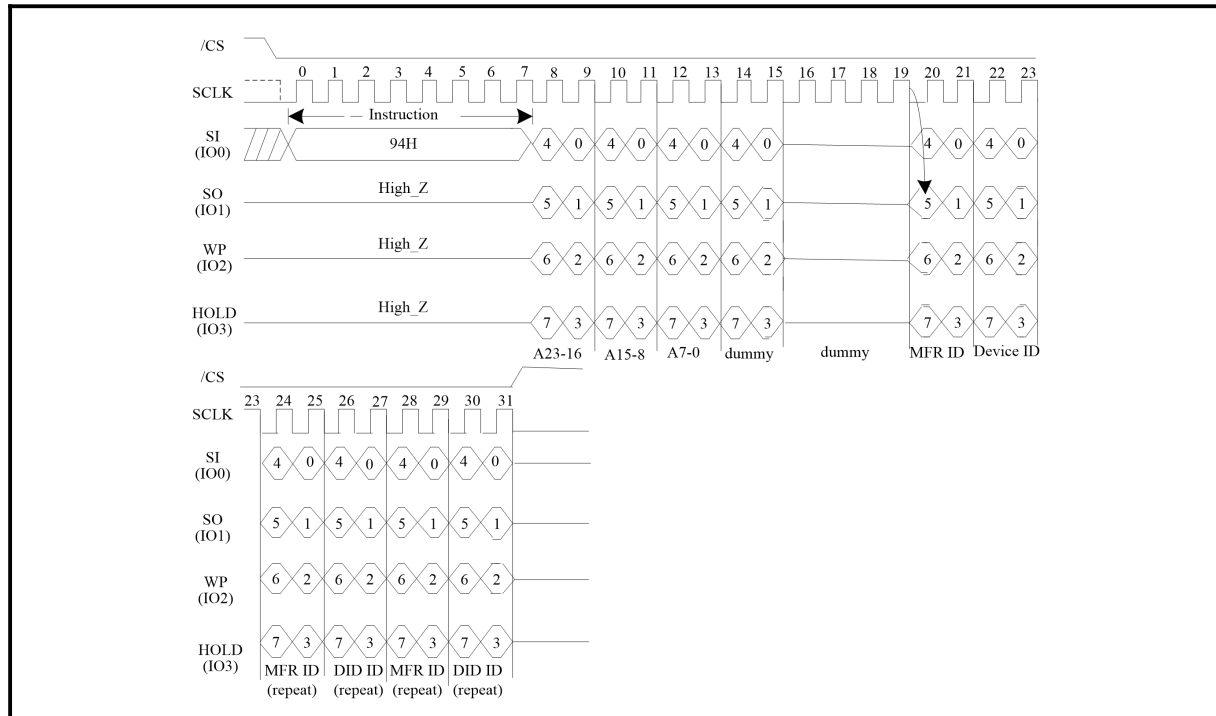Figure 40. Quad I/O Read Manufacture ID/ Device ID Sequence Diagram (SPI Mode)



7.3.4 Read JEDEC ID (9FH)

The JEDEC ID instruction allows the 8-bit manufacturer identification to be read, followed by two bytes of device identification. The device identification indicates the memory type in the first byte, and the memory capacity of the device in the second byte. JEDEC ID instruction while an Erase or Program cycle is in progress, is not decoded, and has no effect on the cycle that is in progress. The JEDEC ID instruction should not be issued while the device is in Deep Power-Down Mode.

See **Figure 41-Figure 42**, the device is first selected by driving /CS to low. Then, the 8-bit instruction code for the instruction is shifted in. This is followed by the 24-bit device identification, stored in the memory, being shifted out on Serial Data Output, each bit being shifted out during the falling edge of Serial Clock. The JEDEC ID instruction is terminated by driving /CS to high at any time during data output. When /CS is driven high, the device is put in the Standby Mode. Once in the Standby Mode, the device waits to be selected, so that it can receive, decode and execute instructions.

Figure 41. JEDEC ID Sequence Diagram (SPI Mode)


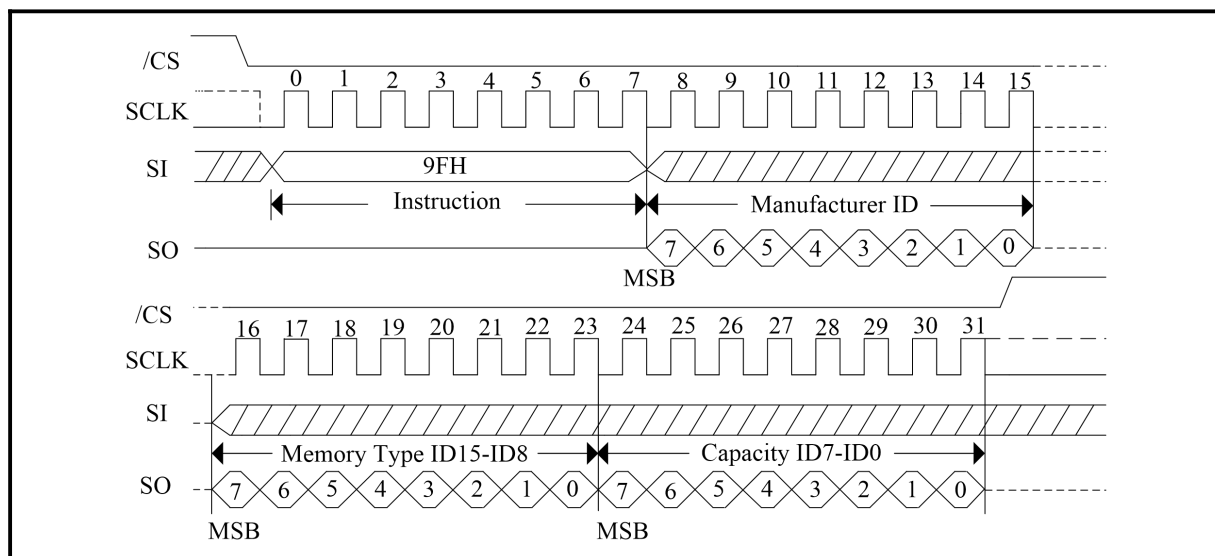



Figure 42. JEDEC ID Sequence Diagram (QPI Mode)

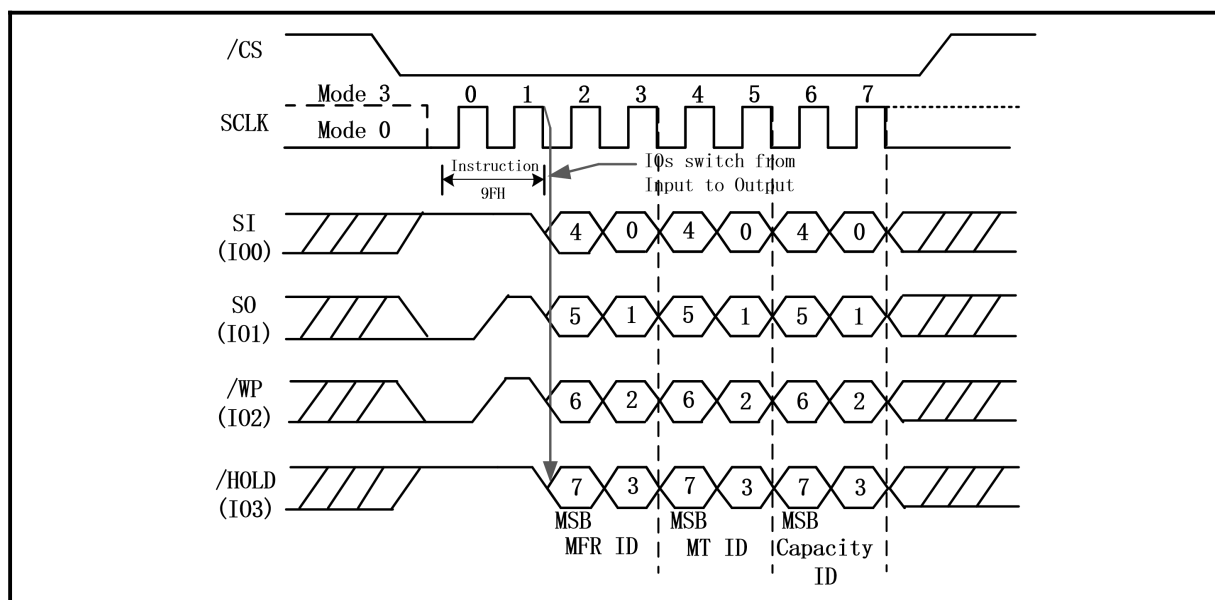

7.3.5 Read Unique ID Number (4Bh)

The Read Unique ID Number instruction accesses a factory-set read-only 128-bit number that is unique to each BY25FQ128EL device. The ID number can be used in conjunction with user software methods to help prevent copying or cloning of a system. The Read Unique ID instruction is initiated by driving the /CS pin low and shifting the instruction code “4Bh” followed by four bytes of dummy clocks in SPI mode.

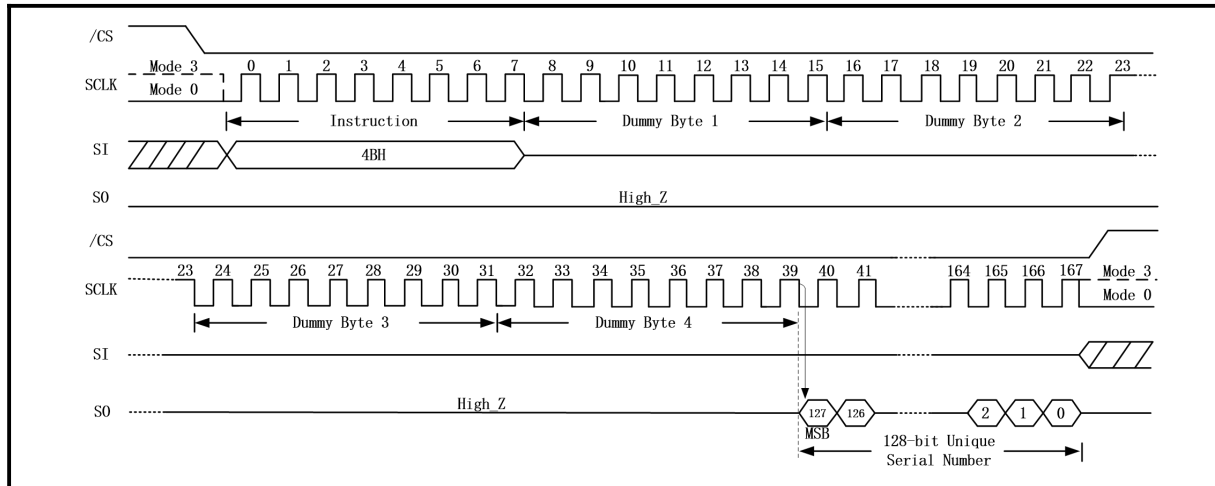Figure 43. Read Unique ID Sequence Diagram (SPI Mode only)



7.3.6 Deep Power-Down (B9H)

Although the standby current during normal operation is relatively low, standby current can be further reduced with the Deep Power-down instruction. The lower power consumption makes the Deep Power-down (DPD) instruction especially useful for battery powered applications (see [ICC1](#) and [ICC2](#)). The instruction is initiated by driving the /CS pin low and shifting the instruction code “B9h” as shown in **Figure 44-Figure 45**

The /CS pin must be driven high after the eighth bit has been latched. If this is not done the Deep Power down instruction will not be executed. After /CS is driven high, the power-down state will be entered within the time duration of tDP. While in the power-down state only the Release from Deep Power-down/Device ID instruction, software reset sequence or hardware reset sequence, which restores the device to normal operation, will be recognized. All other Instructions are ignored. This includes the Read Status Register instruction, which is always available during normal operation. Ignoring all but one instruction also makes the Power Down state a useful condition for securing maximum write protection. The device always powers-up in the normal operation with the standby current of ICC1.

Figure 44. Deep Power-Down Sequence Diagram (SPI Mode)


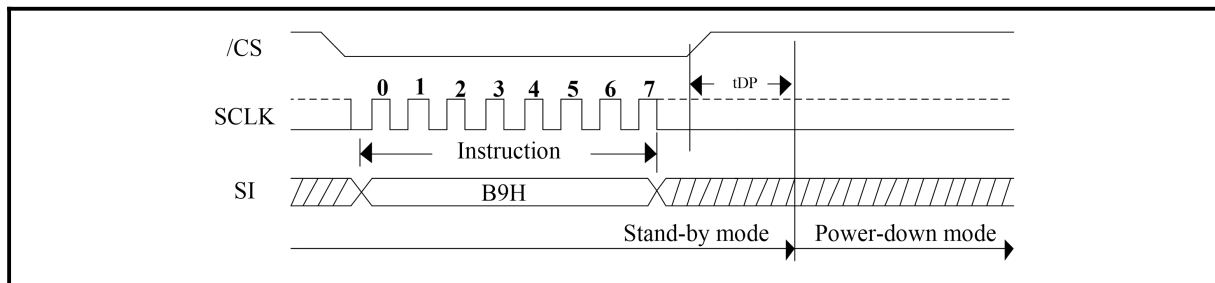


Figure 45. Deep Power-Down Sequence Diagram (QPI Mode)

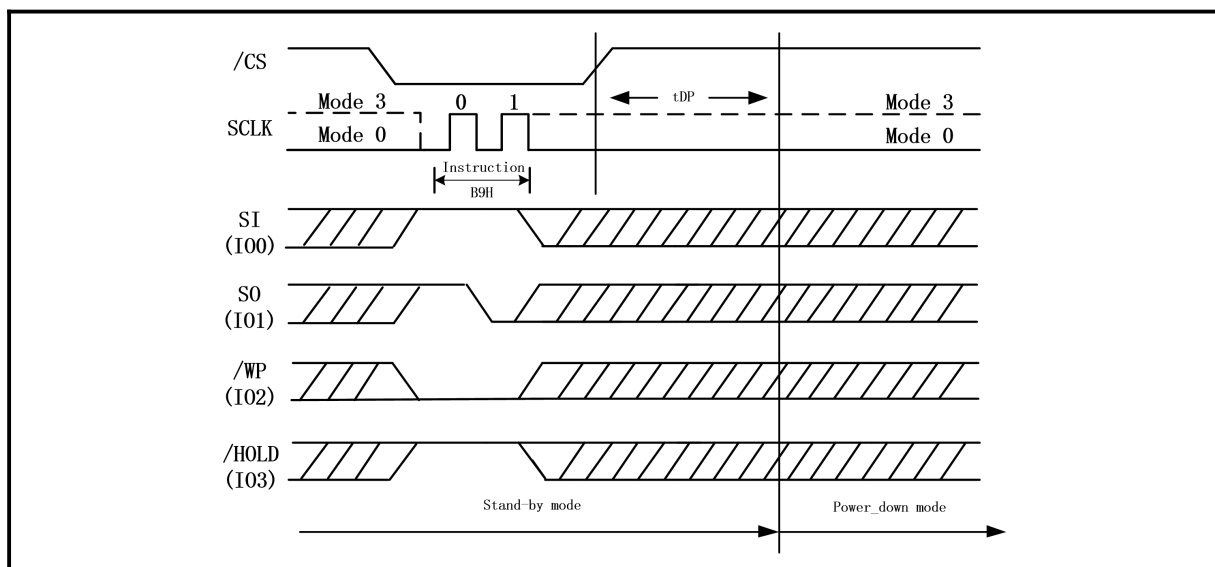

7.3.7 Release from Deep Power-Down/Read Device ID (ABH)

The Release from Power-Down or Device ID instruction is a multi-purpose instruction. It can be used to release the device from the Power-Down state or obtain the devices electronic identification (ID) number.

See **Figure 46-Figure 47**, to release the device from the Power-Down state, the instruction is issued by driving the /CS pin low, shifting the instruction code “ABH” and driving /CS high. Release from Power-Down will take the time duration of t_{RES1} (See [AC Characteristics](#)) before the device will resume normal operation and other instruction are accepted. The /CS pin must remain high during the t_{RES1} time duration.

When used only to obtain the Device ID while not in the Power-Down state, the instruction is initiated by driving the /CS pin low and shifting the instruction code “ABH” followed by 3-dummy byte. The Device ID bits are then shifted out on the falling edge of SCLK with most significant bit (MSB) first as shown in **Figure 48-Figure 49**. The Device ID value for the BY25FQ128EL is listed in Manufacturer and Device Identification table. The Device ID can be read continuously. The instruction is completed by driving /CS high.

When used to release the device from the Power-Down state and obtain the Device ID, the instruction is the same as previously described, and shown in **Figure 48-Figure 49**, except that after /CS is driven high it must remain high for a time duration of t_{RES2} (See [AC Characteristics](#)). After this time duration the device will resume normal operation and other instruction will be accepted. If the Release from Power-Down/Device ID instruction is issued while an Erase, Program or Write cycle is in process (when WIP equal 1) the instruction is ignored and will not have any effects on the current cycle.

Figure 46. Release Power-Down Sequence Diagram (SPI Mode)

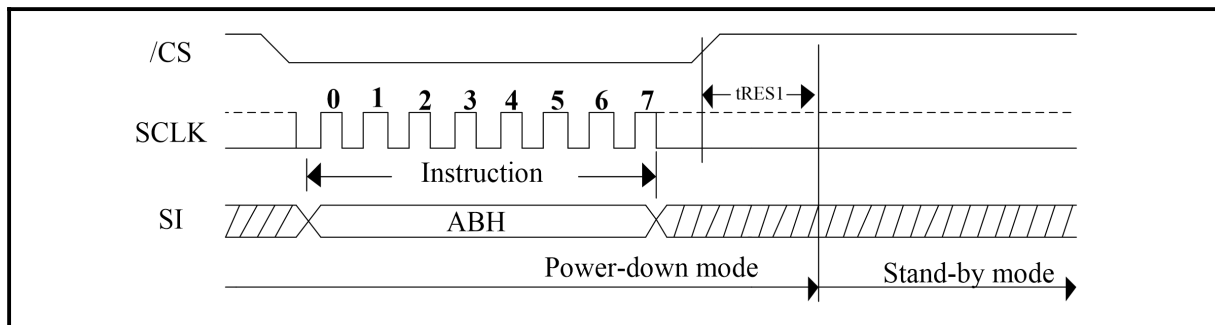


Figure 47. Release Power-Down Sequence Diagram (QPI Mode)

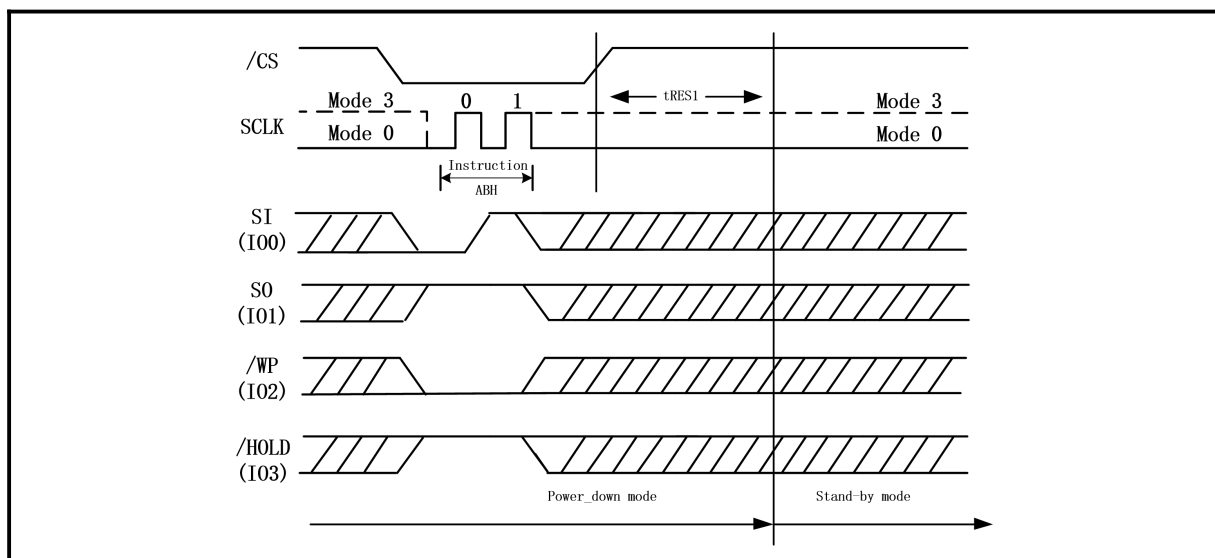
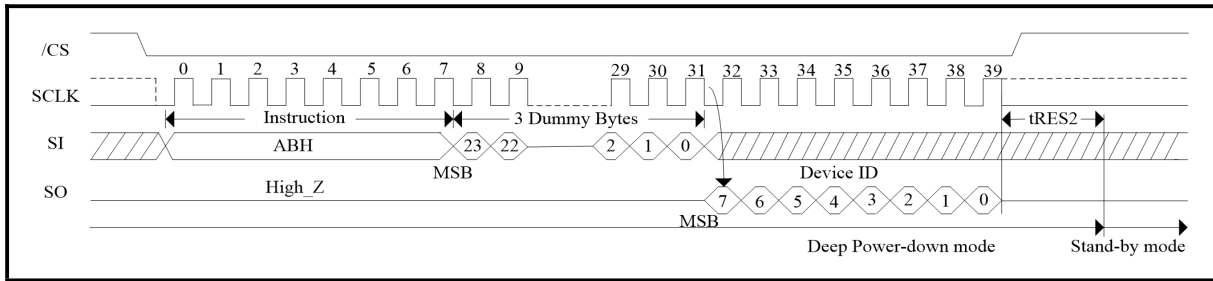
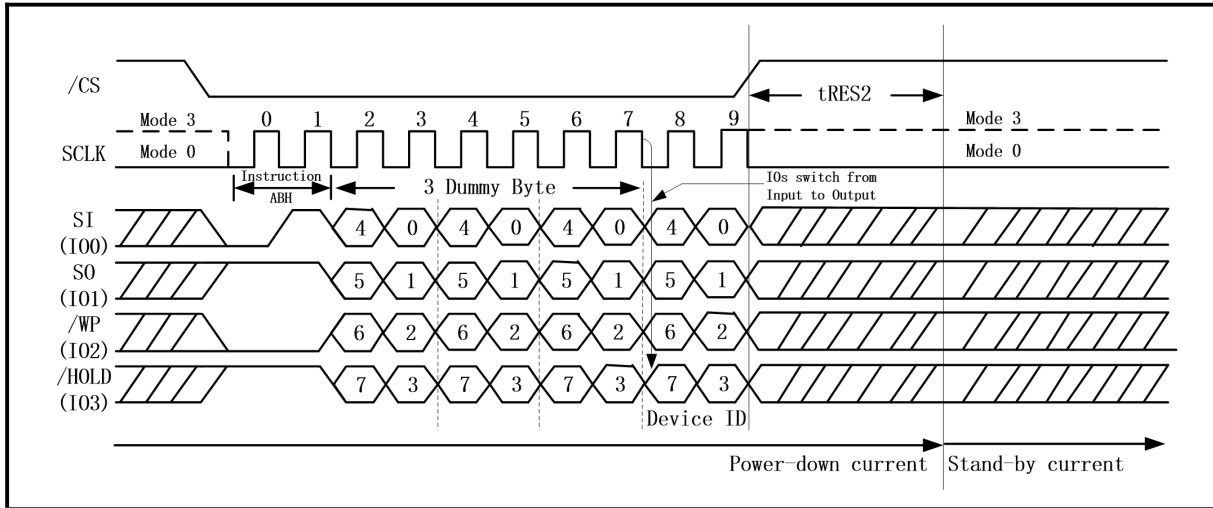


Figure 48. Release Power-Down/Read Device ID Sequence Diagram (SPI Mode)

Figure 49. Release Power-Down/Read Device ID Sequence Diagram (QPI Mode)


7.3.8 Read Security Registers (48H)

See **Figure 50-Figure 51**, the instruction is followed by a 3byte address (A23-A0) and the dummy byte. In QPI mode, the number of dummy can be configured by the “C0h” instruction. Each bit being latched-in during the rising edge of SCLK. Then the memory content, at that address, is shifted out on SO, each bit being shifted out, at a Max frequency fC, during the falling edge of SCLK. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. Once the A9-A0 address reaches the last byte of the register (Byte 3FFH), it will reset to 000H, the instruction is completed by driving /CS high.

| ADDRESS | A23-A16 | A15-12 | A11-10 | A9-0 |
|----------------------|---------|---------|--------|--------------|
| Security Register #1 | 00H | 0 0 0 1 | 0 0 | Byte Address |
| Security Register #2 | 00H/ | 0 0 1 0 | 0 0 | Byte Address |
| Security Register #3 | 00H | 0 0 1 1 | 0 0 | Byte Address |

Figure 50. Read Security Registers instruction Sequence Diagram (SPI Mode)


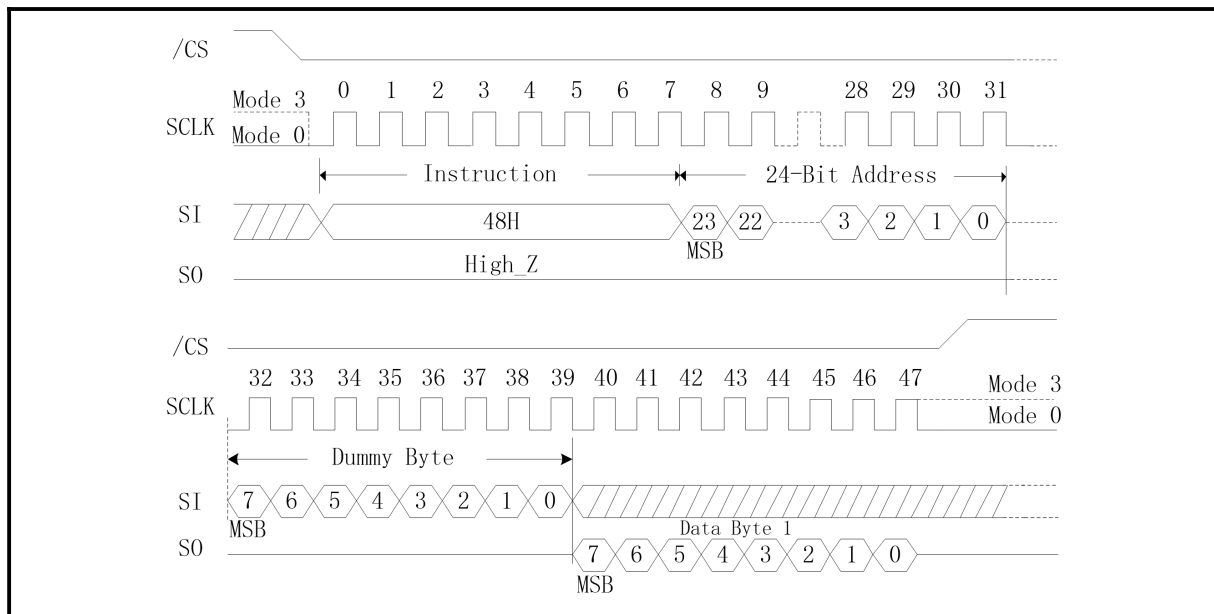


Figure 51. Read Security Registers instruction Sequence Diagram (QPI Mode)

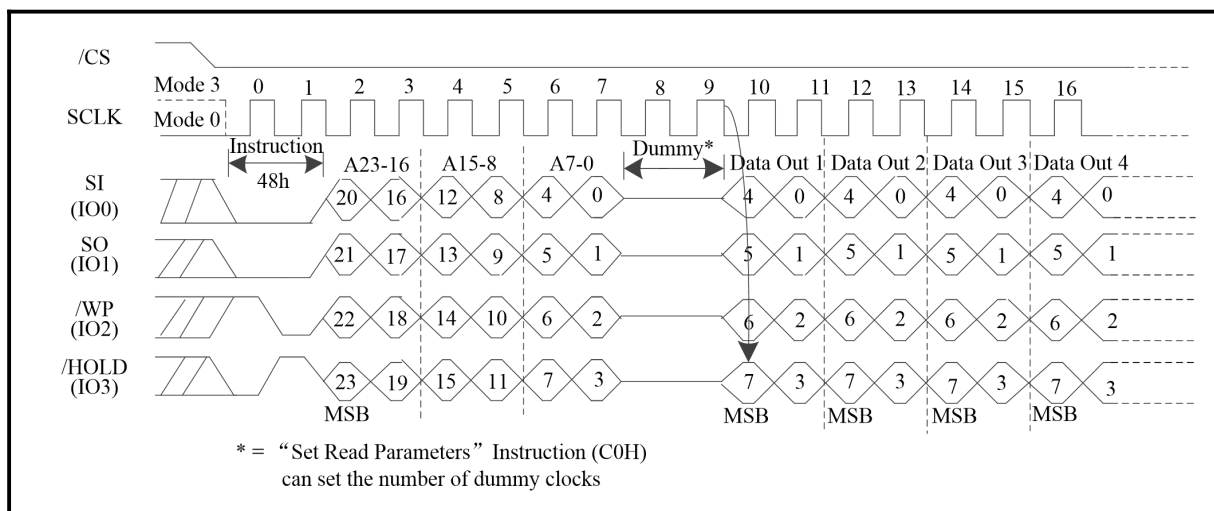

7.3.9 Erase Security Registers (44H)

The BY25FQ128EL provides three 1024-byte Security Registers which can be erased and programmed individually. These registers may be used by the system manufacturers to store security and other important information separately from the main memory array.

See **Figure 52-Figure 53**, the Erase Security Registers instruction is similar to Block/Sector Erase instruction. A Write Enable instruction must previously have been executed to set the Write Enable Latch bit.

The Erase Security Registers instruction sequence: /CS goes low sending Erase Security Registers instruction /CS goes high. /CS must be driven high after the eighth bit of the instruction code has been latched in otherwise the Erase Security Registers instruction is not executed. As soon as /CS is driven high, the self-timed Erase Security Registers cycle (whose duration is tSE) is initiated. While the Erase Security Registers cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Erase Security Registers cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch bit is reset. The Security Registers Lock Bit (LB) in the Status Register can be used to OTP protect the security registers. Once the LB bit is set to 1, the Security Registers will be permanently locked; the Erase Security Registers instruction will be ignored.

| ADDRESS | A23-A16 | A15-12 | A11-10 | A9-0 |
|----------------------|---------|---------|--------|--------------|
| Security Register #1 | 00H | 0 0 0 1 | 0 0 | Byte Address |
| Security Register #2 | 00H | 0 0 1 0 | 0 0 | Byte Address |
| Security Register #3 | 00H | 0 0 1 1 | 0 0 | Byte Address |

Figure 52. Erase Security Registers instruction Sequence Diagram (SPI Mode)


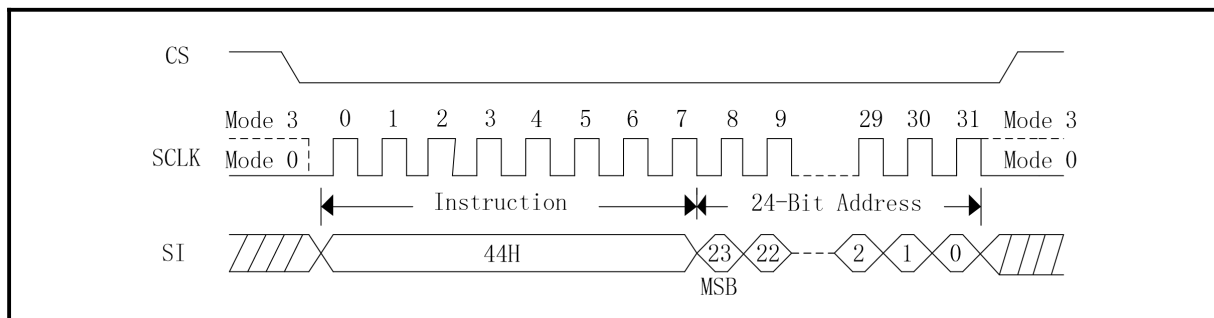


Figure 53. Erase Security Registers instruction Sequence Diagram (QPI Mode)

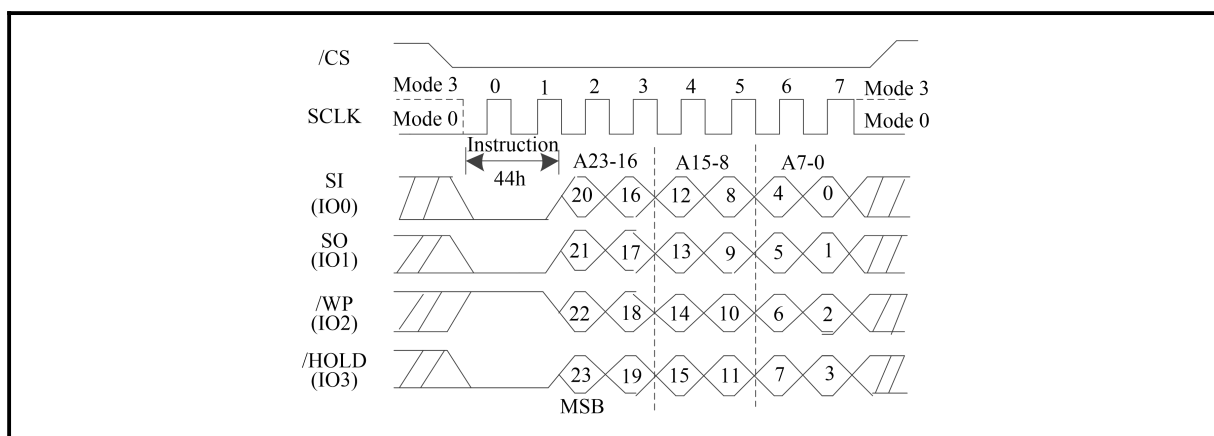

7.3.10 Program Security Registers (42H)

See **Figure 54-Figure 55**, the Program Security Registers instruction is similar to the Page Program instruction. It allows from one byte to 1024 bytes of security register data to be programmed by four times (one time program 256 bytes). A Write Enable instruction must previously have been executed to set the Write Enable Latch bit before sending the Program Security Registers instruction. The Program Security Registers instruction is entered by driving /CS Low, followed by the instruction code (42H), 3-byte address and at least one data byte on SI. As soon as /CS is driven high, the self-timed Program Security Registers cycle (whose duration is tPP) is initiated. While the Program Security Registers cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Program Security Registers cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch bit is reset.

If the Security Registers Lock Bit (LB3/LB2/LB1) is set to 1, the Security Registers will be permanently locked. Program Security Registers instruction will be ignored.

| ADDRESS | A23-A16 | A15-12 | A11-10 | A9-0 |
|----------------------|---------|---------|--------|--------------|
| Security Register #1 | 00H | 0 0 0 1 | 0 0 | Byte Address |
| Security Register #2 | 00H | 0 0 1 0 | 0 0 | Byte Address |
| Security Register #3 | 00H | 0 0 1 1 | 0 0 | Byte Address |

Figure 54. Program Security Registers instruction Sequence Diagram (SPI Mode)


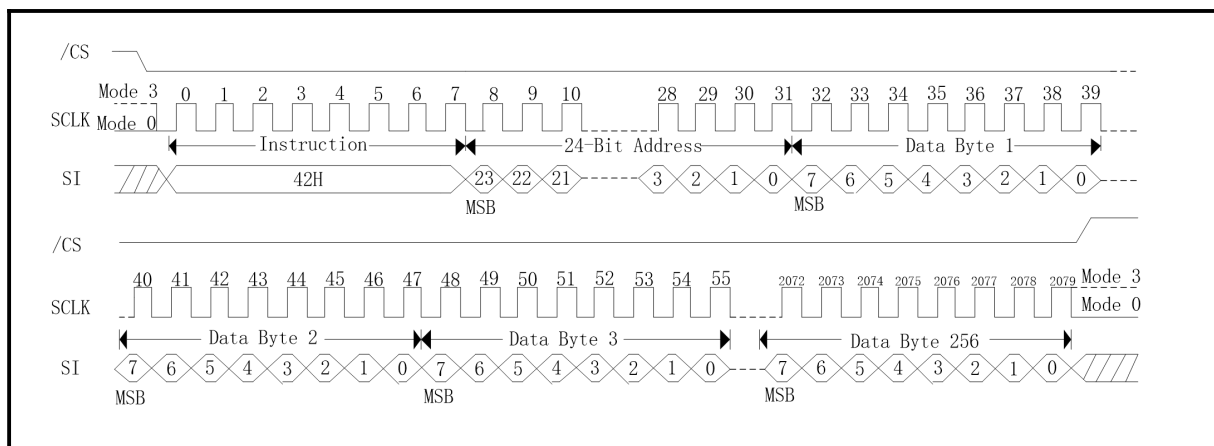


Figure 55. Program Security Registers instruction Sequence Diagram (QPI Mode)

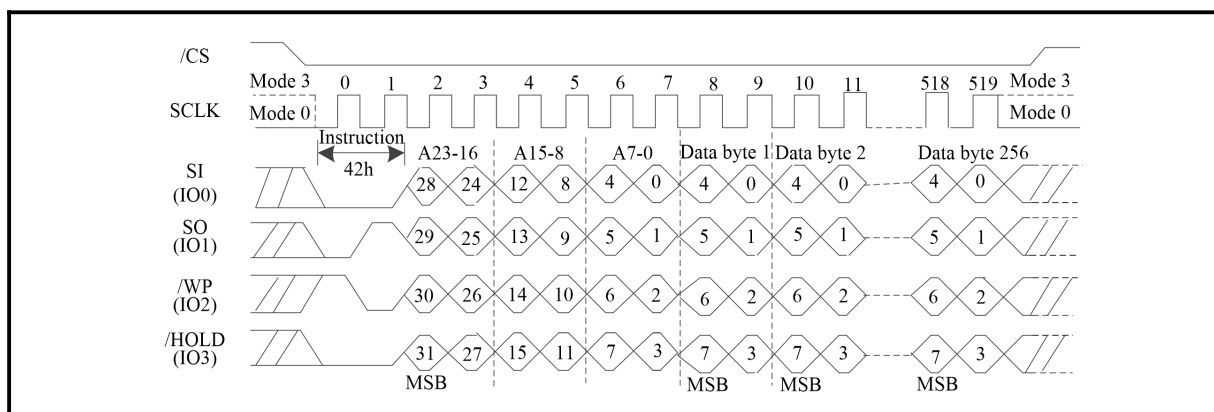

7.3.11 Read Serial Flash Discoverable Parameter (5AH)

See **Figure 56-Figure 57**, The Serial Flash Discoverable Parameter (SFDP) standard provides a consistent method of describing the functional and feature capabilities of serial flash devices in a standard set of internal parameter tables. These parameter tables can be interrogated by host system software to enable adjustments needed to accommodate divergent features from multiple vendors. The concept is similar to the one found in the Introduction of JEDEC Standard, JESD68 on CFI. SFDP is a standard of JEDEC Standard No.216.

The Read SFDP instruction is initiated by driving the /CS pin low and shifting the instruction code “5Ah” followed by a 24-bit address (A23-A0) into the SI pin, regardless of the 3-byte or 4-byte Address Mode. Eight “dummy” clocks are also required in SPI mode. In QPI mode, the number of dummy clocks can be configured by the “Set Read Parameters (C0h)” instruction.

Figure 56. Read Serial Flash Discoverable Parameter instruction Sequence Diagram (SPI Mode)

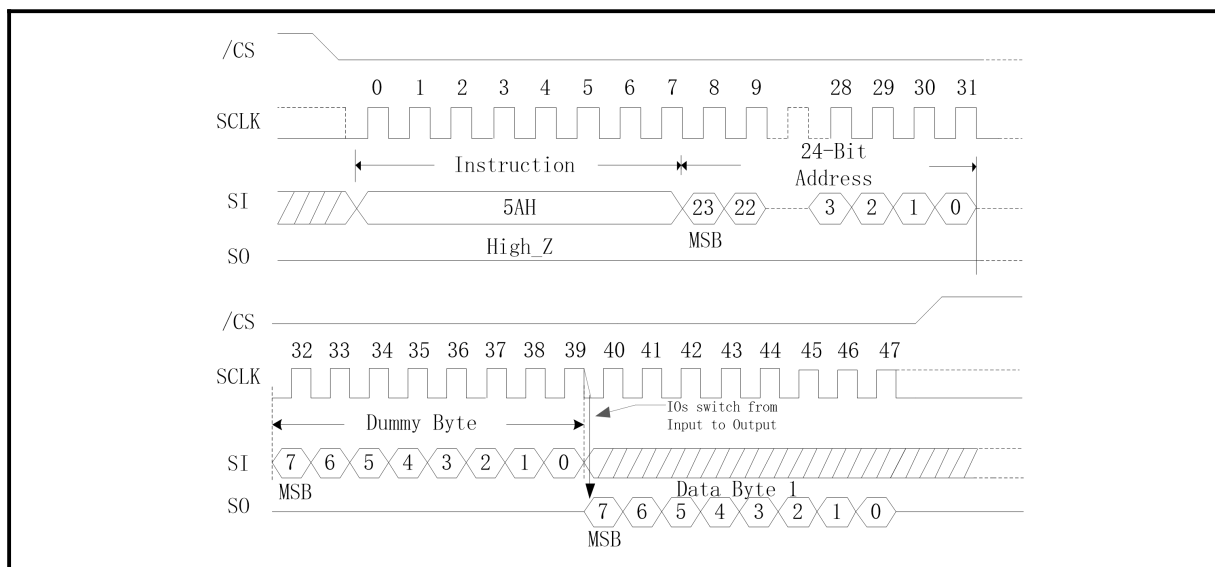


Figure 57. Read Serial Flash Discoverable Parameter instruction Sequence Diagram (QPI Mode)

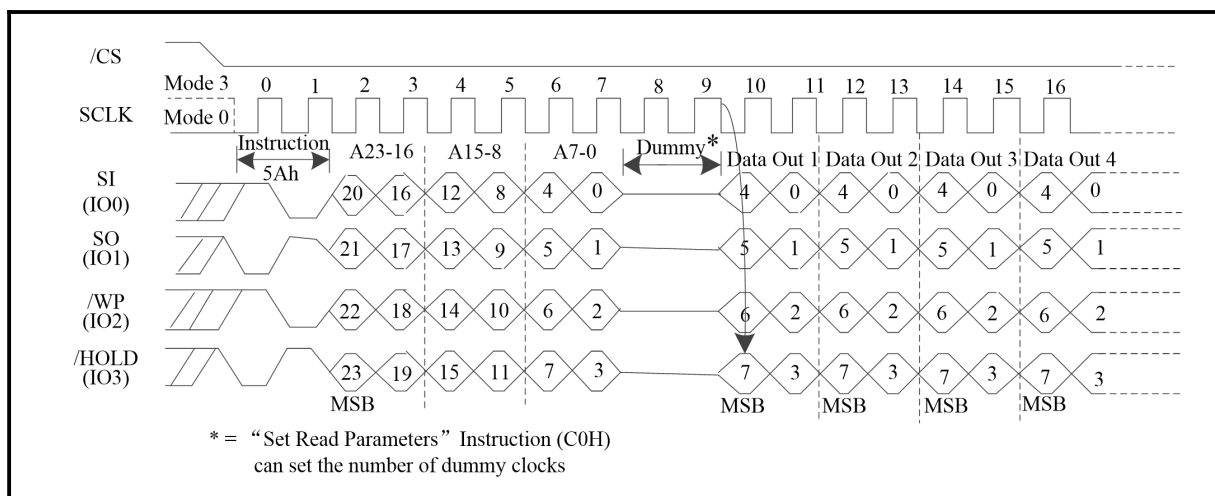


Table 7.3.11-1. Signature and Parameter Identification Data Values

| Description | Comment | Add(H) (Byte) | DW Add (Bit) | Data | Data |
|---|---|------------------|-----------------|------|------|
| SFDP Signature | Fixed:50444653H | 00H | 07:00 | 53H | 53H |
| | | 01H | 15:08 | 46H | 46H |
| | | 02H | 23:16 | 44H | 44H |
| | | 03H | 31:24: | 50H | 50H |
| SFDP Minor Revision Number | Start from 00H | 04H | 07:00 | 00H | 00H |
| SFDP Major Revision Number | Start from 01H | 05H | 15:08 | 01H | 01H |
| Number of Parameters Headers | Start from 00H | 06H | 23:16 | 01 H | 01 H |
| Unused | Contains 0xFFH and can never be changed | 07H | 31:24 | FFH | FFH |
| ID number (JEDEC) | 00H: It indicates a JEDEC specified header | 08H | 07:00 | 00H | 00H |
| Parameter Table Minor Revision Number | Start from 0x00H | 09H | 15:08 | 00H | 00H |
| Parameter Table Major Revision Number | Start from 0x01H | 0AH | 23:16 | 01H | 01H |
| Parameter Table Length (in double word) | How many DWORDs in the Parameter table | 0BH | 31:24 | 09H | 09H |
| Parameter Table Pointer (PTP) | First address of JEDEC Flash Parameter table | 0CH | 07:00 | 30H | 30H |
| | | 0DH | 15:08 | 00H | 00H |
| | | 0EH | 23:16 | 00H | 00H |
| Unused | Contains 0xFFH and can never be changed | 0FH | 31:24 | FFH | FFH |
| ID Number LSB (Manufacturer ID) | It is indicates BY Technology Device manufacturer ID | 10H | 07:00 | 68H | 68H |
| Parameter Table Minor Revision Number | Start from 0x00H | 11 H | 15:08 | 00H | 00H |
| Parameter Table Major Revision Number | Start from 0x01H | 12H | 23:16 | 01H | 01H |
| Parameter Table Length (in double word) | How many DWORDs in the Parameter table | 13H | 31:24 | 03H | 03H |
| Parameter Table Pointer (PTP) | First address of BY Technology Device Flash Parameter table | 14H | 07:00 | 60H | 60H |
| | | 15H | 15:08 | 00H | 00H |
| | | 16H | 23:16 | 00H | 00H |
| Unused | Contains 0xFFH and can never be changed | 17H | 31:24 | FFH | FFH |

Table 7.3.11-2. Parameter Table (0): JEDEC Flash Parameter Tables

| Description | Comment | Add(H) (Byte) | DW Add (Bit) | Data | Data |
|---|---|------------------|-----------------|-----------|------|
| Block/Sector Erase Size | 00: Reserved; 01: 4KB erase; 10: Reserved; 11: not support 4KB erase | 30H | 01:00 | 01b | E5H |
| Write Granularity | 0: 1Byte, 1: 64Byte or larger | | 02 | 1b | |
| Write Enable Instruction Requested for Writing to Volatile Status Registers | 0: Nonvolatile status bit 1: Volatile status bit (BP status register bit) | | 03 | 0b | |
| Write Enable Opcode Select for Writing to Volatile Status Registers | 0: Use 50H Opcode, 1: Use 06H Opcode, Note: If target flash status register is Nonvolatile, then bits 3 and 4 must be set to 00b. | | 04 | 0b | |
| Unused | Contains 111b and can never be changed | | 07:05 | 111b | |
| 4KB Erase Opcode | | 31H | 15:08 | 20H | 20H |
| (1 -1 -2) Fast Read | 0=Not support, 1=Support | 32H | 16 | 1b | F1H |
| Address Bytes Number used in addressing flash array | 00: 3Byte only, 01: 3 or 4Byte, 10: 4Byte only, 11: Reserved | | 18:17 | 00b | |
| Double Transfer Rate (DTR) clocking | 0=Not support, 1=Support | | 19 | 0b | |
| (1 -2-2) Fast Read | 0=Not support, 1=Support | | 20 | 1b | |
| (1 -4-4) Fast Read | 0=Not support, 1=Support | | 21 | 1b | |
| (1 -1 -4) Fast Read | 0=Not support, 1=Support | | 22 | 1b | |
| Unused | | | 23 | 1b | |
| Unused | | | 33H | 31:24 | |
| Flash Memory Density | Flash Memory Density For densities 2 gigabits or less, bit-31 is set to 0b. The field 30:0 defines the size in bits. Example: 00FFFFFFh = 16 megabits For densities 4 gigabits and above, bit-31 is set to 1b. The field 30:0 defines 'N' where the density is computed as 2^N bits (N must be >= 32). Example: 80000021h = 2^33 = 8 gigabits | 37H:34 | 31:00 | 07FFFFFFH | |
| (1 -4-4) Fast Read Number of Wait states | 00000b: Wait states (Dummy Clocks) not support | 38H | 04:00 | 00100b | 44H |
| (1 -4-4) Fast Read Number of Mode Bits | 000b:Mode Bits not support | | 07:05 | 010b | |
| (1 -4-4) Fast Read Opcode | | 39H | 15:08 | EBH | EBH |
| (1 -1 -4) Fast Read Number of Wait states | 00000b: Wait states (Dummy Clocks) not support | 3AH | 20:16 | 01000b | 08H |
| (1 -1 -4) Fast Read Number of Mode Bits | 000b:Mode Bits not support | | 23:21 | 000b | |
| (1 -1 -4) Fast Read Opcode | | 3BH | 31:24 | 6BH | 6BH |
| (1 -1 -2) Fast Read Number of Wait states | 00000b: Wait states (Dummy Clocks) not support | 3CH | 04:00 | 01000b | 08H |
| (1 -1 -2) Fast Read Number of Mode Bits | 000b: Mode Bits not support | | 07:05 | 000b | |
| (1 -1 -2) Fast Read Opcode | | 3DH | 15:08 | 3BH | 3BH |
| (1 -2-2) Fast Read Number of Wait states | 0000b: Wait states (Dummy Clocks) not support | 3EH | 20:16 | 00010b | 42H |
| (1 -2-2) Fast Read Number of | 000b: Mode Bits not support | | 23:21 | 010b | |

| | | | | | |
|---|---|---------|-------|--------|-------|
| Mode Bits | | | | | |
| (1 -2-2) Fast Read Opcode | | 3FH | 31:24 | BBH | BBH |
| (2-2-2) Fast Read | 0=not support 1=support | 40H | 00 | 0b | FEH |
| Unused | | | 03:01 | 111b | |
| (4-4-4) Fast Read | 0=not support 1=support | | 04 | 1b | |
| Unused | | | 07:05 | 111b | |
| Unused | | 43H:41H | 31:08 | 0xFFH | 0xFFH |
| Unused | | 45H:44H | 15:00 | 0xFFH | 0xFFH |
| (2-2-2) Fast Read Number of Wait states | 0 0000b: Wait states (Dummy Clocks) not support | 46H | 20:16 | 00000b | 00H |
| (2-2-2) Fast Read Number of Mode Bits | 000b: Mode Bits not support | | 23:21 | 000b | |
| (2-2-2) Fast Read Opcode | | 47H | 31:24 | FFH | FFH |
| Unused | | 49H:48H | 15:00 | 0xFFH | 0xFFH |
| (4-4-4) Fast Read Number of Wait states | 0 0000b: Wait states (Dummy Clocks) not support | 4AH | 20:16 | 00100b | 44H |
| (4-4-4) Fast Read Number of Mode Bits | 000b: Mode Bits not support | | 23:21 | 010b | |
| (4-4-4) Fast Read Opcode | | 4BH | 31:24 | EBH | EBH |
| Sector Type 1 Size | Sector/block size=2 ^N bytes 0x00b: this sector type don't exist | 4CH | 07:00 | 0CH | 0CH |
| Sector Type 1 erase Opcode | | 4DH | 15:08 | 20H | 20H |
| Sector Type 2 Size | Sector/block size=2 ^N bytes 0x00b: this sector type don't exist | 4EH | 23:16 | 0FH | 0FH |
| Sector Type 2 erase Opcode | | 4FH | 31:24 | 52H | 52H |
| Sector Type 3 Size | Sector/block size=2 ^N bytes 0x00b: this sector type don't exist | 50H | 07:00 | 10H | 10H |
| Sector Type 3 erase Opcode | | 51H | 15:08 | D8H | D8H |
| Sector Type 4 Size | Sector/block size=2 ^N bytes 0x00b: this sector type don't exist | 52H | 23:16 | 00H | 00H |
| Sector Type 4 erase Opcode | | 53H | 31:24 | FFH | FFH |

Table 7.3.11-3. Parameter Table (1): BY Technology Device Flash Parameter Tables

| Description | Comment | Add(H) (Byte) | DW Add (Bit) | Data | Data |
|---|---|------------------|-----------------|-------|-------|
| Vcc Supply Maximum Voltage | 2000H=2.000V 2700H=2.700V 3600H=3.600V | 61H:60H | 15:00 | 2000H | 2000H |
| Vcc Supply Minimum Voltage | 1650H=1.650V 2250H=2.250V 2350H=2.350V 2700H=2.700V | 63H:62H | 31:16 | 1650H | 1650H |
| HW Reset# pin | 0=not support 1=support | 65H:64H | 00 | 1b | F99FH |
| HW Hold# pin | 0=not support 1=support | | 01 | 1b | |
| Deep Power Down Mode | 0=not support 1=support | | 02 | 1b | |
| SW Reset | 0=not support 1=support | | 03 | 1b | |
| SW Reset Opcode | Should be issue Reset Enable(66H)before Reset cmd. | | 11:04 | 99H | |
| Program Suspend/Resume | 0=not support 1=support | | 12 | 1b | |
| Erase Suspend/Resume | 0=not support 1=support | | 13 | 1b | |
| Unused | | | 14 | 1b | |
| Wrap-Around Read mode | 0=not support 1=support | | 15 | 1b | |
| Wrap-Around Read mode Opcode | | 66H | 23:16 | 77H | 77H |
| Wrap-Around Read data length | 08H:support 8B wrap-around read 16H:8B&16B 32H:8B&16B&32B 64H:8B&16B&32B&64B | 67H | 31:24 | 64H | 64H |
| Individual block lock | 0=not support 1=support | 6BH:68H | 00 | 0b | EBFCH |
| Individual block lock bit(Volatile/Nonvolatile) | 0=Volatile 1=Nonvolatile | | 01 | 0b | |
| Individual block lock Opcode | | | 09:02 | FFH | |
| Individual block lock Volatile protect bit default protect status | 0=protect 1=unprotect | | 10 | 0b | |
| Secured OTP | 0=not support 1=support | | 11 | 1b | |
| Read Lock | 0=not support 1=support | | 12 | 0b | |
| Permanent Lock | 0=not support 1=support | | 13 | 1b | |
| Unused | | | 15:14 | 11b | |
| Unused | | | 31:16 | FFFFH | |

7.4 Program and Erase Instructions

7.4.1 Page Program (02H)

The Page Program instruction is for programming the memory. A Write Enable instruction must previously have been executed to set the Write Enable Latch bit before sending the Page Program instruction.

See **Figure 58**, the Page Program instruction is entered by driving /CS Low, followed by the instruction code, 3-byte address and at least one data byte on SI. If the 8 least significant address bits (A7-A0) are not all zero, all transmitted data that goes beyond the end of the current page are programmed from the start address of the same page (from the address whose 8 least significant bits (A7-A0) are all zero). /CS must be driven low for the entire duration of the sequence. The Page Program instruction sequence: /CS goes low-> sending Page Program instruction ->3-byte address on SI ->at least 1 byte data on SI-> /CS goes high.

If more than 256 bytes are sent to the device, previously latched data are discarded and the last 256 data bytes are guaranteed to be programmed correctly within the same page. If less than 256 data bytes are sent to device, they are correctly programmed at the requested addresses without having any effects on the other bytes of the same page. /CS must be driven high after the eighth bit of the last data byte has been latched in; otherwise the Page Program instruction is not executed.

As soon as /CS is driven high, the self-timed Page Program cycle (whose duration is t_{PP}) is initiated. While the Page Program cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Page Program cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch bit is reset.

A Page Program instruction applied to a page which is protected by the Block Protect (BP4, BP3, BP2, BP1, BP0) bits (see **Table 6-Table 7**) are not executed.

Figure 58. Page Program Sequence Diagram (SPI Mode)


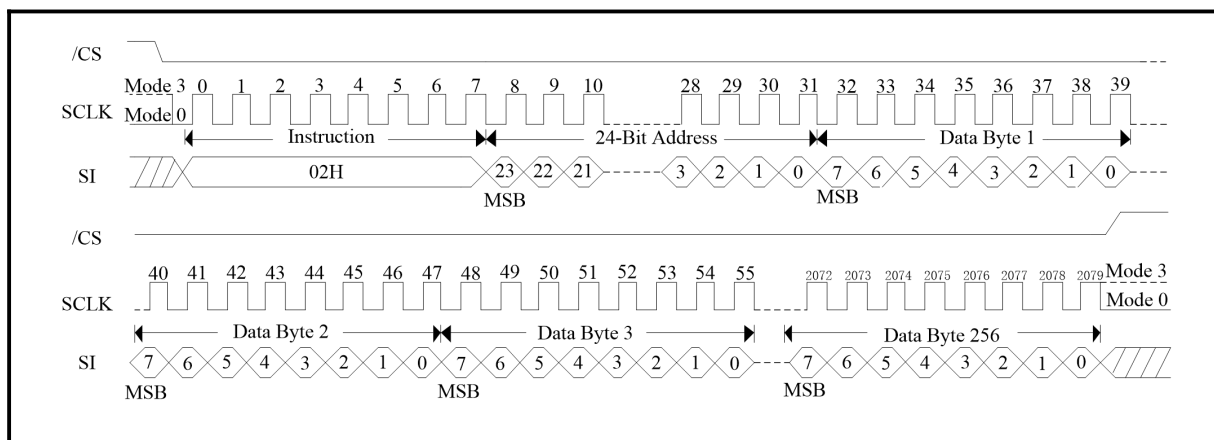


Figure 59. Page Program Sequence Diagram (QPI Mode)

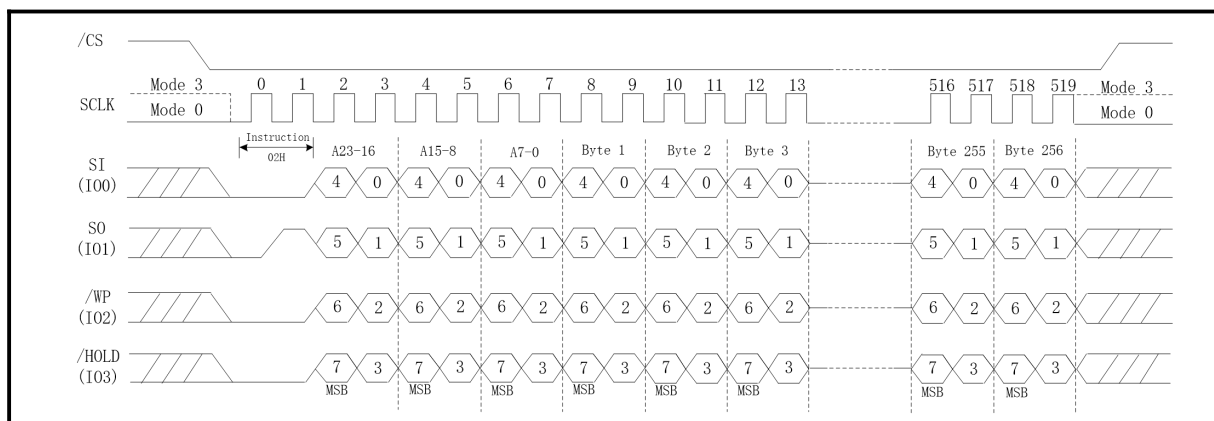


7.4.2 Quad Page Program (32H)

The Quad Page Program instruction is for programming the memory using for pins: IO0, IO1, IO2 and IO3. To use Quad Page Program the Quad enable in status register Bit9 must be set (QE=1). A Write Enable instruction must previously have been executed to set the Write Enable Latch bit before sending the Page Program instruction. The Quad Page Program instruction is entered by driving /CS Low, followed by the instruction code (32H), three address bytes and at least one data byte on IO pins. The Quad Enable bit (QE) of Status Register must be set to enable.

The instruction sequence is shown in **Figure 60**. If more than 256 bytes are sent to the device, previously latched data are discarded and the last 256 data bytes are guaranteed to be programmed correctly within the same page. If less than 256 data bytes are sent to device, they are correctly programmed at the requested addresses without having any effects on the other bytes of the same page. /CS must be driven high after the eighth bit of the last data byte has been latched in; otherwise the Quad Page Program instruction is not executed.

As soon as /CS is driven high, the self-timed Quad Page Program cycle (whose duration is tPP) is initiated. While the Quad Page Program cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Quad Page Program cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch bit is reset. A Quad Page Program instruction applied to a page which is protected by the Block Protect (BP4, BP3, BP2, BP1, BP0) bits (see **Table 6-Table 7**) is not executed

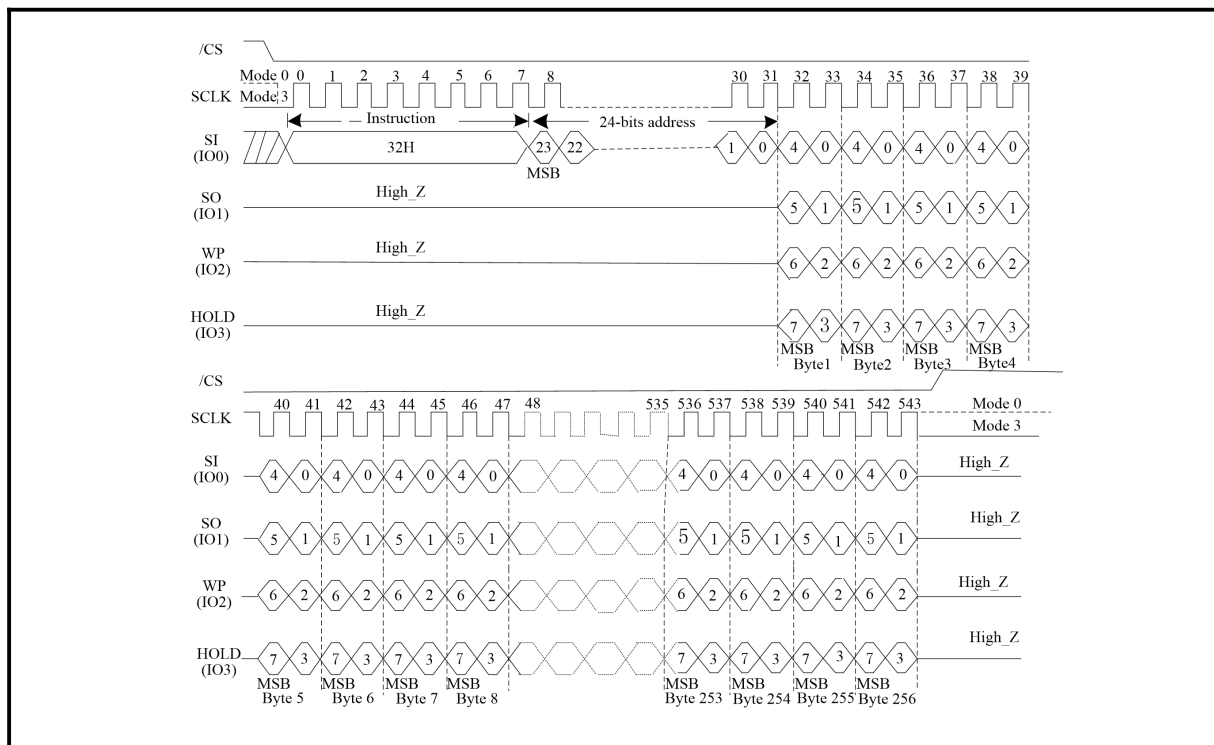Figure 60. Quad Page Program Sequence Diagram (SPI Mode only)



7.4.3 Sector Erase (20H)

The Sector Erase instruction is for erasing the all data of the chosen sector. A Write Enable instruction must previously have been executed to set the Write Enable Latch bit. The Sector Erase instruction is entered by driving /CS low, followed by the instruction code, and 3-address byte on SI. Any address inside the sector is a valid address for the Sector Erase instruction. /CS must be driven low for the entire duration of the sequence.

See **Figure 61**, The Sector Erase instruction sequence: /CS goes low-> sending Sector Erase instruction-> 3-byte address on SI ->/CS goes high. /CS must be driven high after the eighth bit of the last address byte has been latched in; otherwise the Sector Erase instruction is not executed. As soon as /CS is driven high, the self-timed Sector Erase cycle (whose duration is tSE) is initiated. While the Sector Erase cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Sector Erase cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch bit is reset. A Sector Erase instruction applied to a sector which is protected by the Block Protect (BP4, BP3, BP2, BP1, BP0) bits (see **Table 6-Table 7**) is not executed.

Figure 61. Sector Erase Sequence Diagram (SPI Mode)


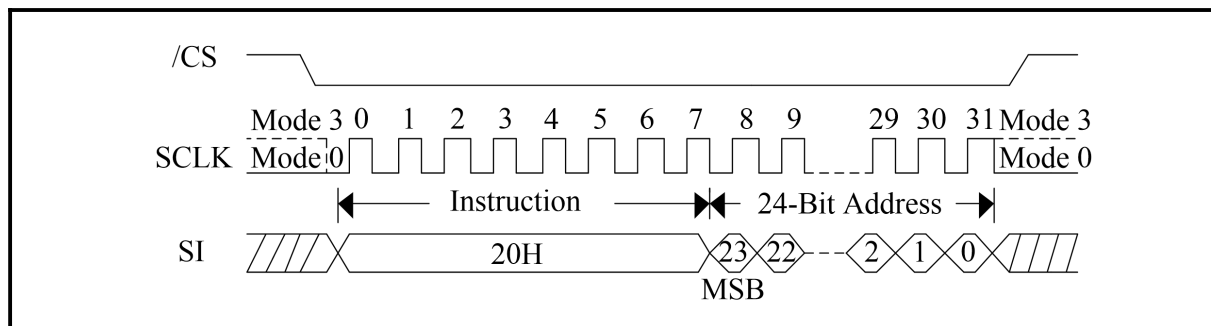


Figure 62. Sector Erase Sequence Diagram (QPI Mode/3-Byte Address Mode)

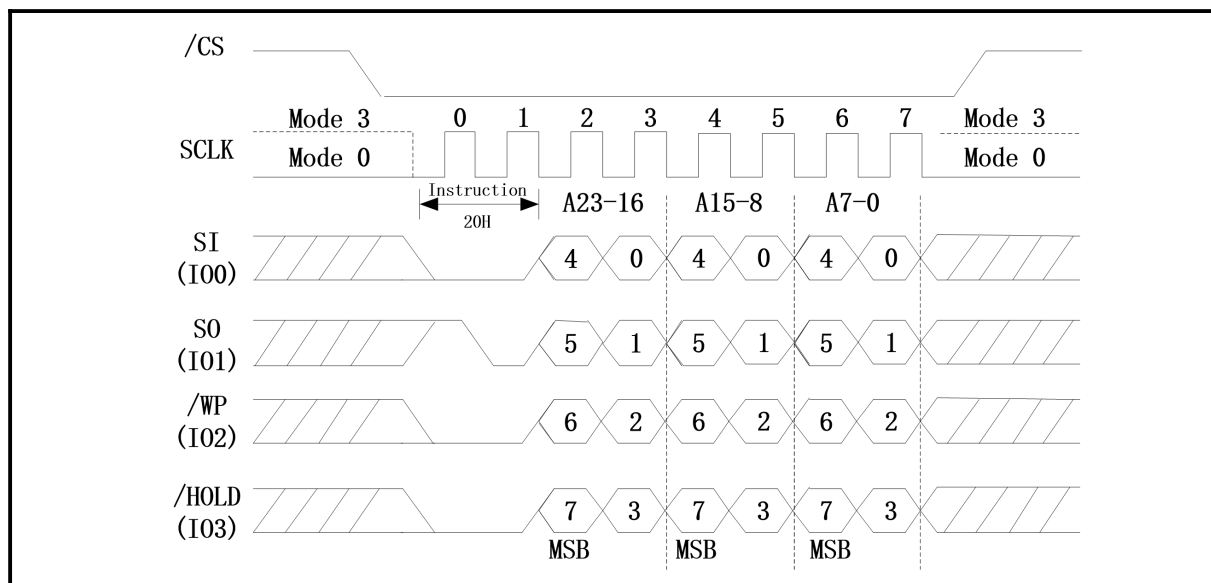

7.4.4 32KB Block Erase (52H)

The 32KB Block Erase instruction is for erasing the all data of the chosen block. A Write Enable instruction must previously have been executed to set the Write Enable Latch bit. The 32KB Block Erase instruction is entered by driving /CS low, followed by the instruction code, and 3-byte address on SI. Any address inside the block is a valid address for the 32KB Block Erase instruction. /CS must be driven low for the entire duration of the sequence.

See **Figure 63**, the 32KB Block Erase instruction sequence: /CS goes low -> sending 32KB Block Erase instruction -> 3-byte address on SI -> /CS goes high. /CS must be driven high after the eighth bit of the last address byte has been latched in; otherwise the 32KB Block Erase instruction is not executed. As soon as /CS is driven high, the self-timed Block Erase cycle (whose duration is tBE) is initiated. While the Block Erase cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Block Erase cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch bit is reset. A 32KB Block Erase instruction applied to a block which is protected by the Block Protect (BP4, BP3, BP2, BP1, BP0) bits (see **Table 6-Table 7**) is not executed.

Figure 63. 32KB Block Erase Sequence Diagram (SPI Mode)


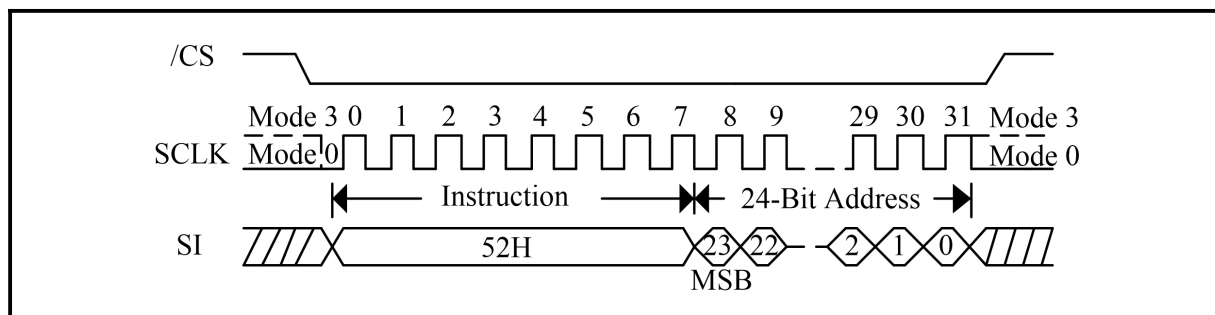


Figure 64. 32KB Block Erase Sequence Diagram (QPI Mode)

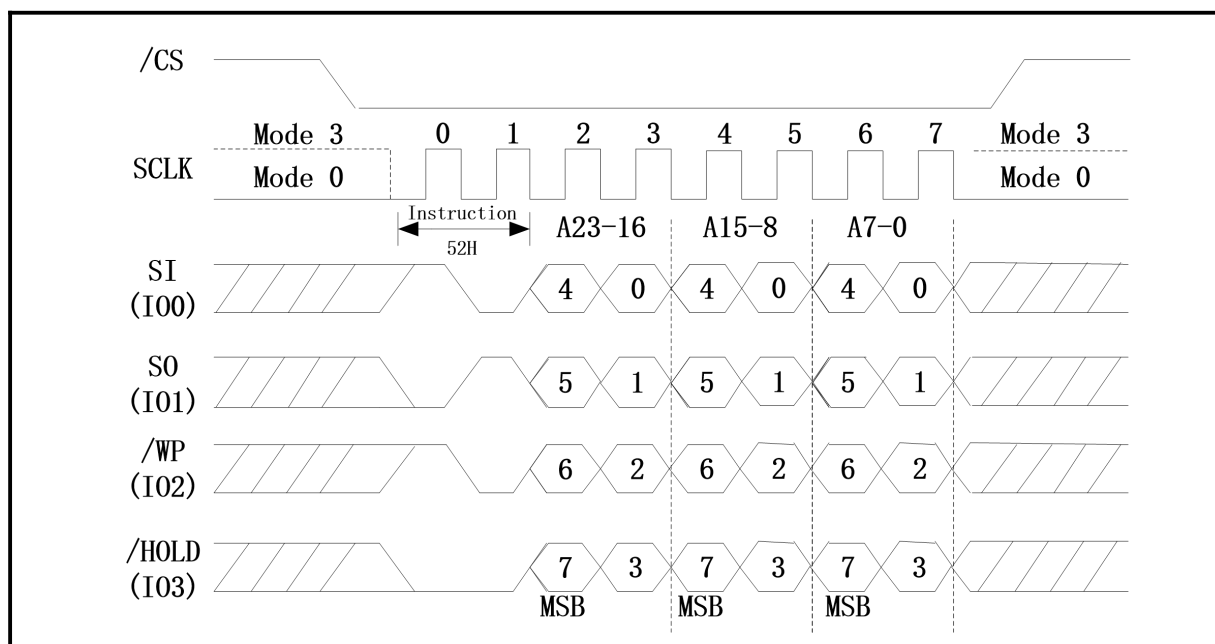

7.4.5 64KB Block Erase (D8H)

The 64KB Block Erase instruction is for erasing the all data of the chosen block. A Write Enable instruction must previously have been executed to set the Write Enable Latch bit. The 64KB Block Erase instruction is entered by driving /CS low, followed by the instruction code, and 3-byte address on SI. Any address inside the block is a valid address for the 64KB Block Erase instruction. /CS must be driven low for the entire duration of the sequence.

See **Figure 65**, the 64KB Block Erase instruction sequence: /CS goes low sending 64KB Block Erase instruction 3-byte address on SI /CS goes high. /CS must be driven high after the eighth bit of the last address byte has been latched in; otherwise the 64KB Block Erase instruction is not executed. As soon as /CS is driven high, the self-timed Block Erase cycle (whose duration is tBE) is initiated. While the Block Erase cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Block Erase cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch bit is reset. A 64KB Block Erase instruction applied to a block which is protected by the Block Protect (BP4, BP3, BP2, BP1, BP0) bits (see **Table 6-Table 7**) is not executed.

Figure 65. 64KB Block Erase Sequence Diagram (SPI Mode)


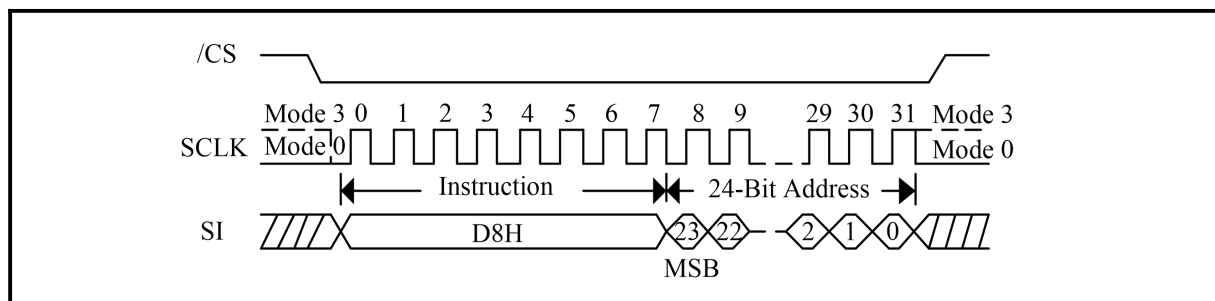


Figure 66. 64KB Block Erase Sequence Diagram (QPI Mode)

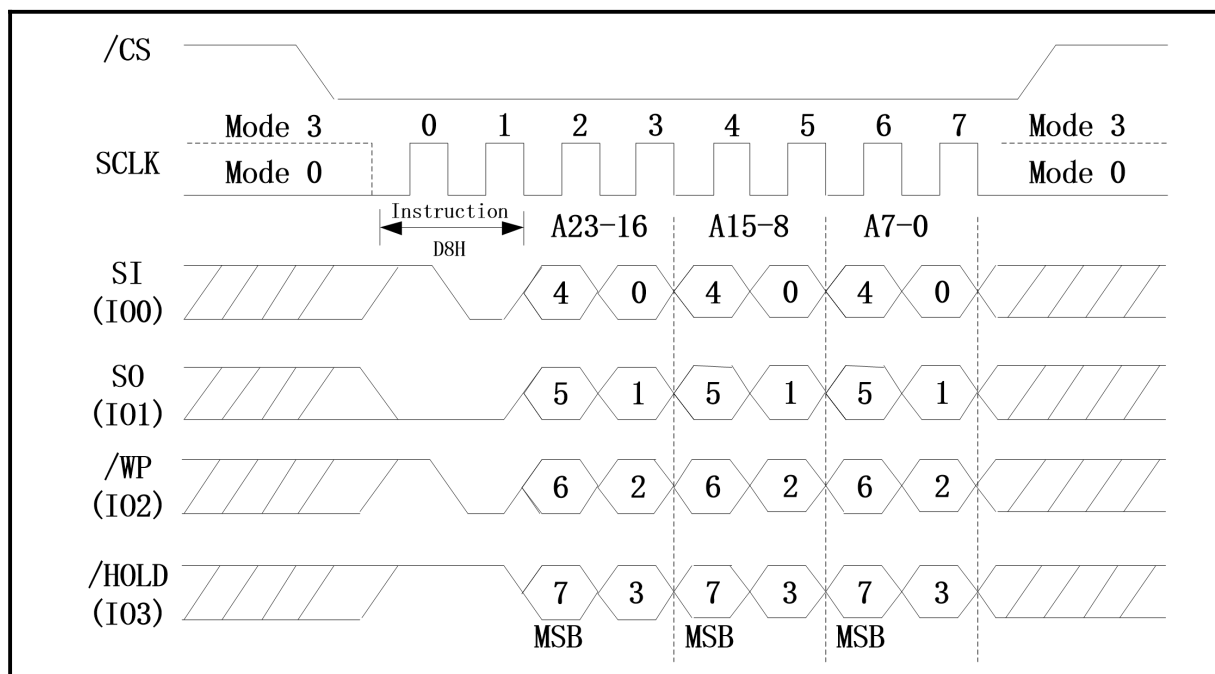

7.4.6 Chip Erase (60/C7H)

The Chip Erase instruction sets all memory within the device to the erased state of all 1s (FFh). A Write Enable instruction must be executed before the device will accept the Chip Erase Instruction (Status Register bit WEL must equal 1). The instruction is initiated by driving the /CS pin low and shifting the instruction code “C7h” or “60h”. The Chip Erase instruction sequence is shown in **Figure 67**.

The /CS pin must be driven high after the eighth bit has been latched. If this is not done the Chip Erase instruction will not be executed. After /CS is driven high, the self-timed Chip Erase instruction will commence for a time duration of tCE. While the Chip Erase cycle is in progress, the Read Status Register instruction may still be accessed to check the status of the WIP bit.

The WIP bit is a 1 during the Chip Erase cycle and becomes a 0 when finished and the device is ready to accept other Instructions again. After the Chip Erase cycle has finished the Write Enable Latch (WEL) bit in the Status Register is cleared to 0. The Chip Erase instruction is executed only if all Block Protect (BP2, BP1, and BP0) bits are 0. The Chip Erase instruction is ignored if one or more sectors are protected.

Figure 67. Chip Erase Sequence Diagram (SPI Mode)


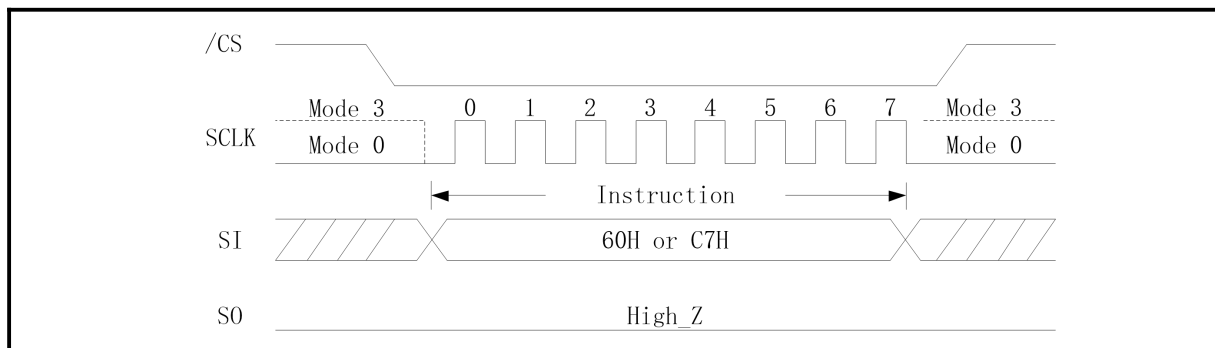


Figure 68. Chip Erase Sequence Diagram (QPI Mode)

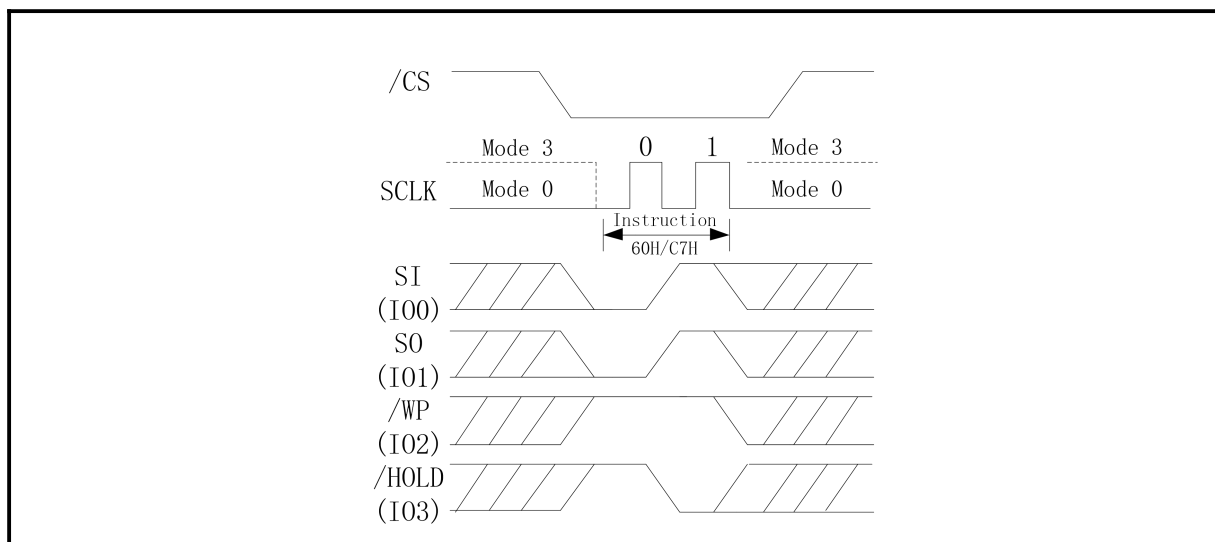

7.4.7 Program/Erase Suspend (75H)

The Program/Erase Suspend instruction “75h” allows the system to interrupt a Page Program or a Sector/32K/64K Block Erase operation (The time between the Program/Erase instruction and the Program/Erase Suspend instruction is tPS/tES). After the program operation has entered the suspended state, the memory array can be read except for the page being programmed. And after the erase operation has entered the suspended state, the memory array can be read or programmed except for the sector/32kb block/64kb block being erased. Write status register operation can't be suspended. The Program/Erase Suspend instruction sequence is shown in **Figure 69**.

Table 12. Readable Area of Memory While a Program Operation is Suspended

| Suspended operation | Readable Region Of Memory Array |
|---------------------|-----------------------------------|
| Page Program | All but the Page being programmed |
| Quad Page Program | All but the Page being programmed |

Table 13. Readable or Programmable Area of Memory While an Erase Operation is Suspended

| Suspended operation | Readable Region or Programmable Of Memory Array |
|---------------------|---|
| Erase(4KB) | All but the Sector being Erased |
| Block Erase(32KB) | All but the 32kb Block being Erased |
| Block Erase(64KB) | All but the 64kb Block being Erased |

When the Serial NOR Flash receives the Suspend instruction, there is a latency of tPSL or tESL before the Write Enable Latch (WEL) bit clears to “0” and the SUS2 or SUS1 sets to “1”, after which the device is ready to accept one of the instructions listed in "Table Acceptable Instructions During Program/Erase Suspend after tPSL/tESL" (e.g. FAST READ). Refer to "AC Characteristics" for tPSL and tESL timings. "Table Acceptable instructions During Suspend (tPSL/tESL not required)" lists the Instructions for which the tPSL and tESL latencies do not apply. For example, “05h”, “66h” and “99h” can be issued at any time after the Suspend instruction.

Status Register bit 15 (SUS2) and bit 10 (SUS1) can be read to check the suspend status. The SUS2 (Program Suspend Bit) sets to “1” when a program instruction is suspended. The SUS1 (Erase Suspend Bit) sets to “1” when an erase operation is suspended. The SUS2 or SUS1 clears to “0” when the program or erase instruction is resumed.

Table 14. Acceptable instructions During Program/Erase Suspend after tPSL/tESL

| Instruction Name | Instruction code | Suspend Type | |
|------------------------------|------------------|-----------------|---------------|
| | | Program Suspend | Erase Suspend |
| Write Enable | 06h | * | * |
| Write Disable | 04h | * | * |
| Read Data | 03h | * | * |
| Fast Read | 0Bh | * | * |
| Dual Output Fast Read | 3Bh | * | * |
| Quad Output Fast Read | 6Bh | * | * |
| Dual I/O Fast Read | BBh | * | * |
| Quad I/O Fast Read | EBh | * | * |
| Quad I/O Word Fast Read | E7h | * | * |
| Set Burst with Wrap | 77h | * | * |
| Read Mftr./Device ID | 90h | * | * |
| Dual IO Read Mftr./Device ID | 92h | * | * |
| Quad IO Read Mftr./Device ID | 94h | * | * |

| Instruction Name | Instruction code | Suspend Type | |
|------------------------------|------------------|-----------------|---------------|
| | | Program Suspend | Erase Suspend |
| Read JEDEC ID | 9Fh | * | * |
| Read Unique ID Number | 4Bh | * | * |
| Release Power-down/Device ID | ABh | * | * |
| Read Security Registers | 48h | * | * |
| Read SFDP | 5Ah | * | * |
| Page Program | 02h | | * |
| Quad Page Program | 32h | | * |
| Program/Erase Resume | 7Ah | * | * |

Table 15. Acceptable Instructions During Suspend (tPSL/tESL not required)

| Instruction Name | Instruction code | Suspend Type | |
|------------------------|------------------|-----------------|---------------|
| | | Program Suspend | Erase Suspend |
| Read Status Register-1 | 05H | * | * |
| Read Status Register-2 | 35H | * | * |
| Read Status Register-3 | 15H | * | * |
| Enable Reset | 66H | * | * |
| Reset Device | 99H | * | * |

tPSL: Program Suspend Latency; tESL: Erase Suspend Latency.

Figure 69. Program/Erase Suspend Instruction Sequence (SPI Mode)


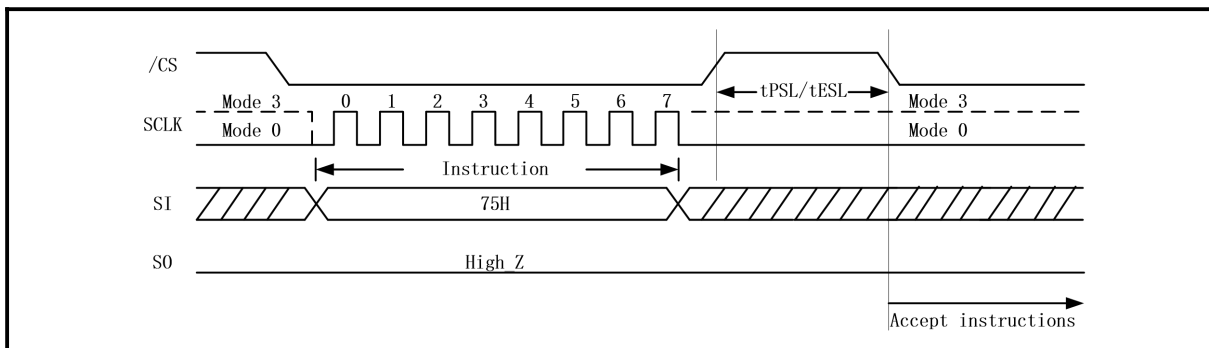


Figure 70. Program/Erase Suspend Instruction Sequence (QPI Mode)

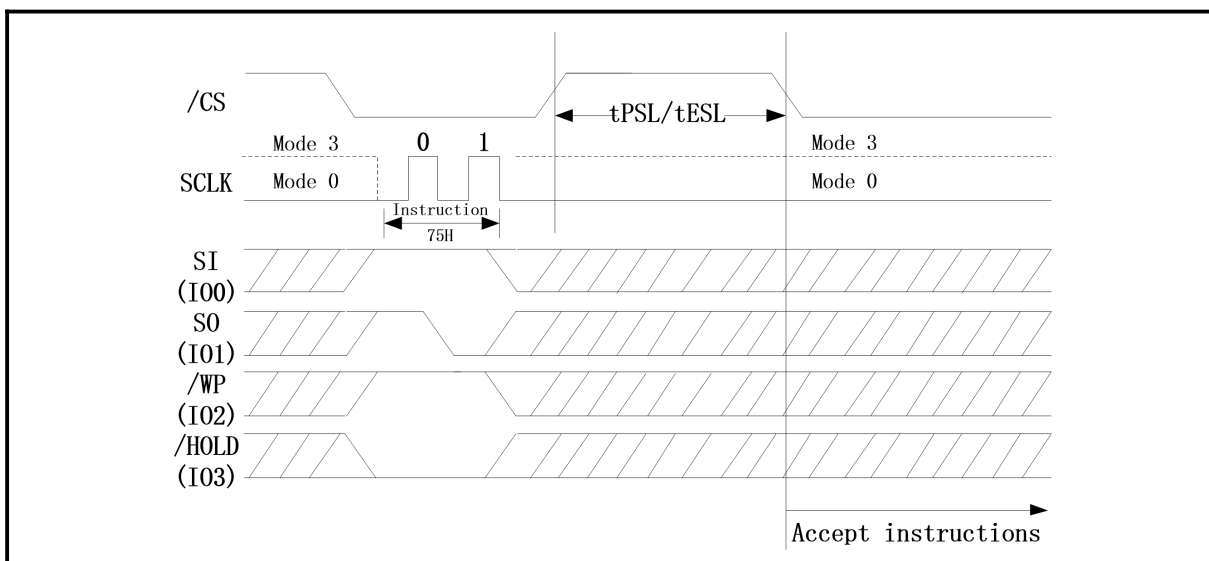


7.4.8 Program/Erase Resume (7AH)

The Program/Erase Resume instruction “7Ah” must be written to resume the Sector or Block Erase operation or the Page Program operation after an Program/Erase Suspend. The Resume instruction “7AH” will be accepted by the device only if the SUS bit in the Status Register equals to 1 and the WIP bit equals to 0.

After the Resume instruction is issued the SUS bit will be cleared from 1 to 0 immediately, the WIP bit will be set from 0 to 1 within 200 ns and the Sector or Block will complete the erase operation or the page will complete the program operation. If the SUS bit equals to 0 or the WIP bit equals to 1, the Resume instruction “7Ah” will be ignored by the device. The Program/Erase Resume instruction sequence is shown in **Figure 71**.

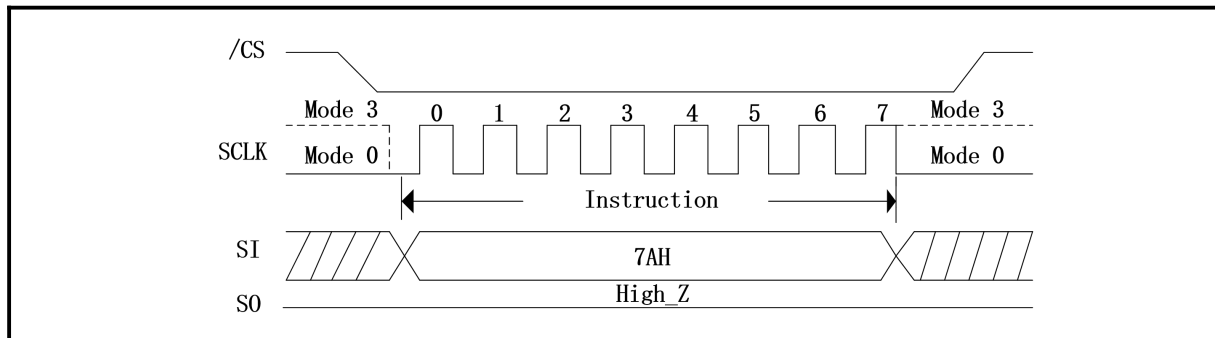Figure 71. Program/Erase Resume Instruction Sequence (SPI Mode)



8. Electrical Characteristics

8.1 Absolute Maximum Ratings

| Parameter | Symbol | Conditions | Range | Unit. |
|------------------------------|--------|---------------------------------------|-------------------|-------|
| Supply Voltage | VCC | | -0.6 to VCC+0.6 | V |
| Voltage Applied to Any Pin | VIO | Relative to Ground | -0.6 to VCC+0.6 | V |
| Transient Voltage on any Pin | VIOT | <20nS Transient Relative to Ground | -1.0V to VCC+1.0V | V |
| Storage Temperature | TSTG | | -65 to +150 | °C |
| Lead Temperature | TLEAD | | See Note (2) | V |

Notes:

1. JEDEC Std JESD22-A114 (C1=100pF, R1=1500 ohms, R2=500 ohms)

8.2 Operating Ranges

| Parameter | Symbol | Conditions | Spec | | Unit. |
|------------------------------|--------|------------|------|------|-------|
| | | | Min | Max | |
| <i>Supply Voltage</i> | VCC | | 1.65 | 2.0 | V |
| <i>Temperature Operating</i> | TA | Commercial | -40 | +85 | °C |
| | | Industrial | -40 | +85 | |
| | | Industrial | -40 | +105 | |
| | | Industrial | -40 | +125 | |


8.3 Latch Up Characteristics

| Parameter | Min | Max |
|--|--------|----------|
| Input Voltage Respect To VSS On I/O Pins | -1.0V | VCC+1.0V |
| VCC Current | -100mA | 100mA |

8.4 Power-up Timing

| Symbol | Parameter | Min | Max | Unit. |
|-----------------|---|-----|-----|-------|
| tVSL | VCC(min) To /CS Low | 1.1 | | ms |
| V _{WI} | Write Inhibit Threshold Voltage V _{WI} | 1.0 | 1.4 | V |

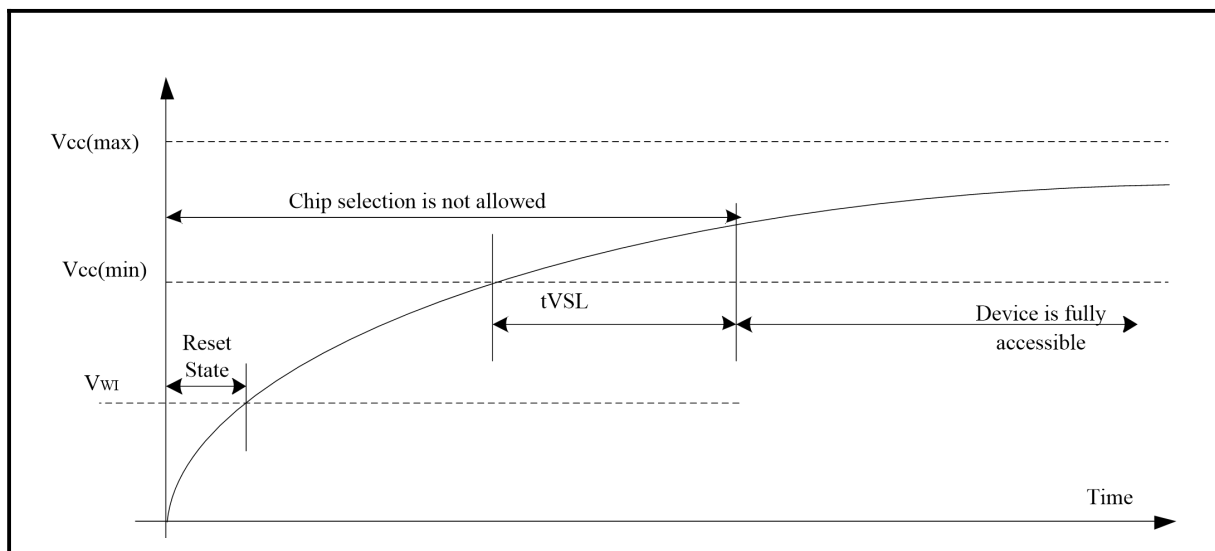Figure 72. Power-up Timing and Voltage Levels



8.5 DC Electrical Characteristics

(T= -40°C~85°C, VCC=1.65~2.0V)

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|--------|---------------------------------|---|---------|------|---------|------|
| ILI | Input Leakage Current | | | | ±2 | μA |
| ILO | Output Leakage Current | | | | ±2 | μA |
| ICC1 | Standby Current | /CS=VCC, VIN=VCC or VSS | | 3.3 | 30 | μA |
| ICC2 | Deep Power-Down Current | /CS=VCC, VIN=VCC or VSS | | 0.6 | 6 | μA |
| ICC3 | Operating Current: (Read) | SCLK=0.1VCC/ 0.9VCC, at 133MHz,Q=Open(*1,*2*4 I/O) | | 4 | 6 | mA |
| | | SCLK=0.1VCC/ 0.9VCC, at 80MHz,Q=Open(*1,*2*4 I/O) | | 3 | 5 | mA |
| ICC4 | Operating Current(Page Program) | /CS=VCC | | 4 | 6 | mA |
| ICC5 | Operating Current(WRS R) | /CS=VCC | | 2 | 8 | mA |
| ICC6 | Operating Current(Sector Erase) | /CS=VCC | | 4 | 8 | mA |
| ICC7 | Operating Current(Block Erase) | /CS=VCC | | 4 | 8 | mA |
| ICC8 | Operating Current (Chip Erase) | /CS=VCC | | 4 | 8 | mA |
| VIL | Input Low Voltage | | -0.5 | | 0.2VCC | V |
| VIH | Input High Voltage | | 0.8VCC | | VCC+0.4 | V |
| VOL | Output Low Voltage | IOL =100μA | | | 0.2 | V |
| VOH | Output High Voltage | IOH =-100μA | VCC-0.2 | | | V |

(T= -40°C~105°C, VCC=1.65~2.0V)

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|--------|---------------------------------|---|---------|------|---------|------|
| ILI | Input Leakage Current | | | | ±2 | μA |
| ILO | Output Leakage Current | | | | ±2 | μA |
| ICC1 | Standby Current | /CS=VCC, VIN=VCC or VSS | | 3.3 | 40 | μA |
| ICC2 | Deep Power-Down Current | /CS=VCC, VIN=VCC or VSS | | 0.6 | 15 | μA |
| ICC3 | Operating Current: (Read) | SCLK=0.1VCC/ 0.9VCC, at 133MHz,Q=Open(*1,*2*4 I/O) | | 4 | 8 | mA |
| | | SCLK=0.1VCC/ 0.9VCC, at 80MHz,Q=Open(*1,*2*4 I/O) | | 3 | 6 | mA |
| ICC4 | Operating Current(Page Program) | /CS=VCC | | 4 | 7 | mA |
| ICC5 | Operating Current(WRS R) | /CS=VCC | | 2 | 8 | mA |
| ICC6 | Operating Current(Sector Erase) | /CS=VCC | | 4 | 8 | mA |
| ICC7 | Operating Current(Block Erase) | /CS=VCC | | 4 | 8 | mA |
| ICC8 | Operating Current (Chip Erase) | /CS=VCC | | 4 | 8 | mA |
| VIL | Input Low Voltage | | -0.5 | | 0.2VCC | V |
| VIH | Input High Voltage | | 0.8VCC | | VCC+0.4 | V |
| VOL | Output Low Voltage | IOL =100μA | | | 0.2 | V |
| VOH | Output High Voltage | IOH =-100μA | VCC-0.2 | | | V |


(T= -40°C~125°C, VCC=1.65~2.0V)

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|--------|---------------------------------|--|---------|------|---------|------|
| ILI | Input Leakage Current | | | | ±2 | μA |
| ILO | Output Leakage Current | | | | ±2 | μA |
| ICC1 | Standby Current | /CS=VCC, VIN=VCC or VSS | | 3.3 | 60 | μA |
| ICC2 | Deep Power-Down Current | /CS=VCC, VIN=VCC or VSS | | 0.6 | 25 | μA |
| ICC3 | Operating Current: (Read) | SCLK=0.1VCC/ 0.9VCC, at 133MHz,Q=Open(*1,*,2*4 I/O) | | 4 | 8 | mA |
| | | SCLK=0.1VCC/ 0.9VCC, at 80MHz,Q=Open(*1,*,2*4 I/O) | | 3 | 6 | mA |
| ICC4 | Operating Current(Page Program) | /CS=VCC | | 4 | 7 | mA |
| ICC5 | Operating Current(WRS R) | /CS=VCC | | 2 | 8 | mA |
| ICC6 | Operating Current(Sector Erase) | /CS=VCC | | 4 | 8 | mA |
| ICC7 | Operating Current(Block Erase) | /CS=VCC | | 4 | 8 | mA |
| ICC8 | Operating Current (Chip Erase) | /CS=VCC | | 4 | 8 | mA |
| VIL | Input Low Voltage | | -0.5 | | 0.2VCC | V |
| VIH | Input High Voltage | | 0.8VCC | | VCC+0.4 | V |
| VOL | Output Low Voltage | IOL =100μA | | | 0.2 | V |
| VOH | Output High Voltage | IOH =-100μA | VCC-0.2 | | | V |

8.6 AC Measurement Conditions

| Symbol | Parameter | Min | Typ. | Max | Unit. | Conditions |
|--------|---------------------------------|------------------|------|-----|-------|------------|
| CL | Load Capacitance | | | 30 | pF | |
| TR, TF | Input Rise And Fall time | | | 5 | ns | |
| VIN | Input Pause Voltage | 0.1VCC to 0.9VCC | | | V | |
| IN | Input Timing Reference Voltage | 0.5VCC | | | V | |
| OUT | Output Timing Reference Voltage | 0.5VCC | | | V | |

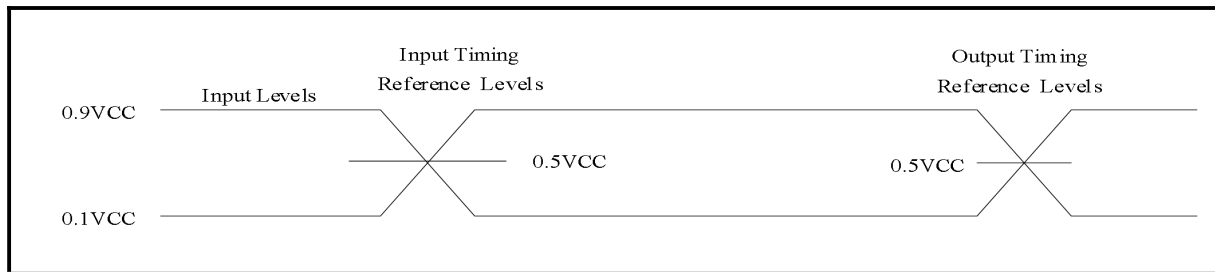Figure 73. AC Measurement I/O Waveform



8.7 AC Electrical Characteristics

(T= -40°C~85°C, VCC=1.65~2.0V)

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|--------|---|----------------------|------|------|------|
| Fc | Clock frequency for all instructions, except Read Data instruction (03H), on 1.65~2.0V power supply | DC. | | 133 | MHz |
| fR | Clock freq. for Read Data instruction (03H) | DC. | | 100 | MHz |
| tCLH | Serial Clock High Time | 45% (1/FC max) | | | ns |
| tCLL | Serial Clock Low Time | 45% (1/FC max) | | | ns |
| tCLCH | Serial Clock Rise Time (Slew Rate) | 0.2 ⁽¹⁾ | | | V/ns |
| tCHCL | Serial Clock Fall Time (Slew Rate) | 0.2 ⁽¹⁾ | | | V/ns |
| tSLCH | /CS Active Setup Time | 5 | | | ns |
| tCHSH | /CS Active Hold Time | 5 | | | ns |
| tSHCH | /CS Not Active Setup Time | 5 | | | ns |
| tCHSL | /CS Not Active Hold Time | 5 | | | ns |
| tSHSL | /CS High Time (read/write) | 20 | | | ns |
| tSHQZ | Output Disable Time | | | 6 | ns |
| tCLQX | Output Hold Time | 1.5 | | | ns |
| tDVCH | Data In Setup Time | 2 | | | ns |
| tCHDX | Data In Hold Time | 2 | | | ns |
| tHLCH | /Hold Low Setup Time (relative to Clock) | 5 | | | ns |
| tHHCH | /Hold High Setup Time (relative to Clock) | 5 | | | ns |

| | | | | | |
|---------------|--|-------------|--------------|-------------|-------------|
| tCHHL | /Hold High Hold Time (relative to Clock) | 5 | | | ns |
| Symbol | Parameter | Min. | Typ. | Max. | Unit |
| tCHHH | /Hold Low Hold Time (relative to Clock) | 5 | | | ns |
| tHLQZ | /Hold Low To High-Z Output | | | 6 | ns |
| tHHQX | /Hold Low To Low-Z Output | | | 6 | ns |
| tCLQV | Clock Low To Output Valid | | | 6 | ns |
| tWHSL | Write Protect Setup Time Before /CS Low | 20 | | | ns |
| tSHWL | Write Protect Hold Time After /CS High | 100 | | | ns |
| tDP | /CS High To Deep Power-Down Mode | | | 2 | μs |
| tRES1 | /CS High To Standby Mode Without Electronic Signature Read | | | 20 | μs |
| tRES2 | /CS High To Standby Mode With Electronic Signature Read | | | 20 | μs |
| tESL | Erase Suspend Latency | | | 40 | μs |
| tPSL | Program Suspend Latency | | | 30 | μs |
| tPRS | Latency between Program Resume and next Suspend ⁽²⁾ | 0.3 | 30 | | μs |
| tERS | Latency between Erase Resume and next Suspend ⁽³⁾ for 4K erase | 0.3 | 1000 | | μs |
| tERS | Latency between Erase Resume and next Suspend ⁽³⁾ for 64K erase | 0.3 | 15000 | | μs |
| tRST | /CS High To Next Instruction After Reset in standby/read | | | 1 | μs |
| | /CS High To Next Instruction After Reset in program/erase/write SR | | | 50 | μs |
| | /CS High To Next Instruction After Reset in Deep Power-Down | | | 30 | μs |
| tW | Write Status Register Cycle Time | | 4 | 25 | ms |
| tBP1 | Byte Program Time (First Byte) ⁽⁴⁾ | | 60 | 120 | μs |
| tBP2 | Additional Byte Program Time (After First Byte) ⁽⁴⁾ | | 1 | 2 | μs |
| tPP | Page Programming Time | | 0.3 | 2.5 | ms |
| tSE | Sector Erase Time | | 20 | 200 | ms |
| tBE | Block Erase Time(32K Bytes/64K Bytes) | | 0.06 /0.1 | 0.5 /1 | S |
| tCE | Chip Erase Time | | 25 | 60 | S |

Notes:

1. Tested with clock frequency lower than 50 MHz.
2. For tPRS, minimum timing must be observed before issuing the next program suspend instruction. However, a period equal to or longer than the typical timing is required in order for the program operation to make progress.
3. For tERS, minimum timing must be observed before issuing the next erase suspend instruction. However, a period equal to or longer than the typical timing is required in order for the erase operation to make progress.
4. For multiple bytes after first byte within a page, $tBP_n = tBP_1 + tBP_2 * N$, where N is the number of bytes programmed.

(T= -40°C~105°C, VCC=1.65~2.0V)

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|-------------------|---|--------------------|-------|------|------|
| F _c | Clock frequency for all instructions, except Read Data instruction (03H), on 1.65~2.0V power supply | DC. | | 133 | MHz |
| f _R | Clock freq. for Read Data instruction (03H) | DC. | | 100 | MHz |
| t _{CLH} | Serial Clock High Time | 45% (1/FC) | | | ns |
| t _{CLL} | Serial Clock Low Time | 45% (1/FC) | | | ns |
| t _{CLCH} | Serial Clock Rise Time (Slew Rate) | 0.2 ⁽¹⁾ | | | V/ns |
| t _{CHCL} | Serial Clock Fall Time (Slew Rate) | 0.2 ⁽¹⁾ | | | V/ns |
| t _{SLCH} | /CS Active Setup Time | 5 | | | ns |
| t _{CHSH} | /CS Active Hold Time | 5 | | | ns |
| t _{SHCH} | /CS Not Active Setup Time | 5 | | | ns |
| t _{CHSL} | /CS Not Active Hold Time | 5 | | | ns |
| t _{SHSL} | /CS High Time (read/write) | 20 | | | ns |
| t _{SHQZ} | Output Disable Time | | | 6 | ns |
| t _{CLQX} | Output Hold Time | 1.5 | | | ns |
| t _{DVCH} | Data In Setup Time | 2 | | | ns |
| t _{CHDX} | Data In Hold Time | 2 | | | ns |
| t _{HLCH} | /Hold Low Setup Time (relative to Clock) | 5 | | | ns |
| t _{HHCH} | /Hold High Setup Time (relative to Clock) | 5 | | | ns |
| t _{CHHL} | /Hold High Hold Time (relative to Clock) | 5 | | | ns |
| t _{CHHH} | /Hold Low Hold Time (relative to Clock) | 5 | | | ns |
| t _{HLQZ} | /Hold Low To High-Z Output | | | 6 | ns |
| t _{HHQX} | /Hold Low To Low-Z Output | | | 6 | ns |
| t _{CLQV} | Clock Low To Output Valid | | | 6 | ns |
| t _{WHSL} | Write Protect Setup Time Before /CS Low | 20 | | | ns |
| t _{SHWL} | Write Protect Hold Time After /CS High | 100 | | | ns |
| t _{DP} | /CS High To Deep Power-Down Mode | | | 2 | μs |
| t _{RES1} | /CS High To Standby Mode Without Electronic Signature Read | | | 20 | μs |
| t _{RES2} | /CS High To Standby Mode With Electronic Signature Read | | | 20 | μs |
| t _{ESL} | Erase Suspend Latency | | | 40 | μs |
| t _{PSL} | Program Suspend Latency | | | 30 | μs |
| t _{PRS} | Latency between Program Resume and next Suspend ⁽²⁾ | 0.3 | 30 | | μs |
| t _{ERS} | Latency between Erase Resume and next Suspend ⁽³⁾ for 4K erase | 0.3 | 1000 | | μs |
| t _{ERS} | Latency between Erase Resume and next Suspend ⁽³⁾ for 64K erase | 0.3 | 15000 | | μs |
| t _{RST} | /CS High To Next Instruction After Reset in standby/read | | | 1 | μs |
| | /CS High To Next Instruction After Reset in program/erase/write SR | | | 50 | μs |

| | | | | | |
|------|--|--|--------------|-----------|----|
| | /CS High To Next Instruction After Reset in Deep Power-Down | | | 30 | μs |
| tW | Write Status Register Cycle Time | | 4 | 25 | ms |
| tBP1 | Byte Program Time (First Byte) ⁽⁴⁾ | | 60 | 120 | μs |
| tBP2 | Additional Byte Program Time (After First Byte) ⁽⁴⁾ | | 1 | 2 | μs |
| tPP | Page Programming Time | | 0.3 | 2.5 | ms |
| tSE | Sector Erase Time | | 20 | 200 | ms |
| tBE | Block Erase Time(32K Bytes/64K Bytes) | | 0.06 /0.1 | 0.5 /1 | S |
| tCE | Chip Erase Time | | 25 | 60 | S |

Notes:

1. Tested with clock frequency lower than 50 MHz.
2. For tPRS, minimum timing must be observed before issuing the next program suspend instruction. However, a period equal to or longer than the typical timing is required in order for the program operation to make progress.
3. For tERS, minimum timing must be observed before issuing the next erase suspend instruction. However, a period equal to or longer than the typical timing is required in order for the erase operation to make progress.
4. For multiple bytes after first byte within a page, $tBP_n = tBP_1 + tBP_2 * N$, where N is the number of bytes programmed





(T= -40°C~125°C, VCC=1.65~2.0V)

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|-------------------|---|--------------------|-------|------|------|
| F _c | Clock frequency for all instructions, except Read Data instruction (03H), on 1.65~2.0V power supply | DC. | | 133 | MHz |
| f _R | Clock freq. for Read Data instruction (03H) | DC. | | 100 | MHz |
| t _{CLH} | Serial Clock High Time | 45% (1/FC) | | | ns |
| t _{CLL} | Serial Clock Low Time | 45% (1/FC) | | | ns |
| t _{CLCH} | Serial Clock Rise Time (Slew Rate) | 0.2 ⁽¹⁾ | | | V/ns |
| t _{CHCL} | Serial Clock Fall Time (Slew Rate) | 0.2 ⁽¹⁾ | | | V/ns |
| t _{SLCH} | /CS Active Setup Time | 5 | | | ns |
| t _{CHSH} | /CS Active Hold Time | 5 | | | ns |
| t _{SHCH} | /CS Not Active Setup Time | 5 | | | ns |
| t _{CHSL} | /CS Not Active Hold Time | 5 | | | ns |
| t _{SHSL} | /CS High Time (read/write) | 20 | | | ns |
| t _{SHQZ} | Output Disable Time | | | 6 | ns |
| t _{CLQX} | Output Hold Time | 1.5 | | | ns |
| t _{DVCH} | Data In Setup Time | 2 | | | ns |
| t _{CHDX} | Data In Hold Time | 2 | | | ns |
| t _{HLCH} | /Hold Low Setup Time (relative to Clock) | 5 | | | ns |
| t _{HHCH} | /Hold High Setup Time (relative to Clock) | 5 | | | ns |
| t _{CHHL} | /Hold High Hold Time (relative to Clock) | 5 | | | ns |
| t _{CHHH} | /Hold Low Hold Time (relative to Clock) | 5 | | | ns |
| t _{HLQZ} | /Hold Low To High-Z Output | | | 6 | ns |
| t _{HHQX} | /Hold Low To Low-Z Output | | | 6 | ns |
| t _{CLQV} | Clock Low To Output Valid | | | 6 | ns |
| t _{WHSL} | Write Protect Setup Time Before /CS Low | 20 | | | ns |
| t _{SHWL} | Write Protect Hold Time After /CS High | 100 | | | ns |
| t _{DP} | /CS High To Deep Power-Down Mode | | | 2 | μs |
| t _{RES1} | /CS High To Standby Mode Without Electronic Signature Read | | | 20 | μs |
| t _{RES2} | /CS High To Standby Mode With Electronic Signature Read | | | 20 | μs |
| t _{ESL} | Erase Suspend Latency | | | 40 | μs |
| t _{PSL} | Program Suspend Latency | | | 30 | μs |
| t _{PRS} | Latency between Program Resume and next Suspend ⁽²⁾ | 0.3 | 30 | | μs |
| t _{ERS} | Latency between Erase Resume and next Suspend ⁽³⁾ for 4K erase | 0.3 | 1000 | | μs |
| t _{ERS} | Latency between Erase Resume and next Suspend ⁽³⁾ for 64K erase | 0.3 | 15000 | | μs |
| t _{RST} | /CS High To Next Instruction After Reset in standby/read | | | 1 | μs |
| | /CS High To Next Instruction After Reset in program/erase/write SR | | | 50 | μs |

| | | | | | |
|------|--|--|--------------|-----------|----|
| | /CS High To Next Instruction After Reset in Deep Power-Down | | | 30 | μs |
| tW | Write Status Register Cycle Time | | 4 | 25 | ms |
| tBP1 | Byte Program Time (First Byte) ⁽⁴⁾ | | 60 | 120 | μs |
| tBP2 | Additional Byte Program Time (After First Byte) ⁽⁴⁾ | | 1 | 2 | μs |
| tPP | Page Programming Time | | 0.3 | 2.5 | ms |
| tSE | Sector Erase Time | | 20 | 200 | ms |
| tBE | Block Erase Time(32K Bytes/64K Bytes) | | 0.06 /0.1 | 0.5 /1 | S |
| tCE | Chip Erase Time | | 25 | 60 | S |


Notes:

1. Tested with clock frequency lower than 50 MHz.
2. For tPRS, minimum timing must be observed before issuing the next program suspend instruction. However, a period equal to or longer than the typical timing is required in order for the program operation to make progress.
3. For tERS, minimum timing must be observed before issuing the next erase suspend instruction. However, a period equal to or longer than the typical timing is required in order for the erase operation to make progress.
4. For multiple bytes after first byte within a page, $tBP_n = tBP_1 + tBP_2 * N$, where N is the number of bytes programmed.

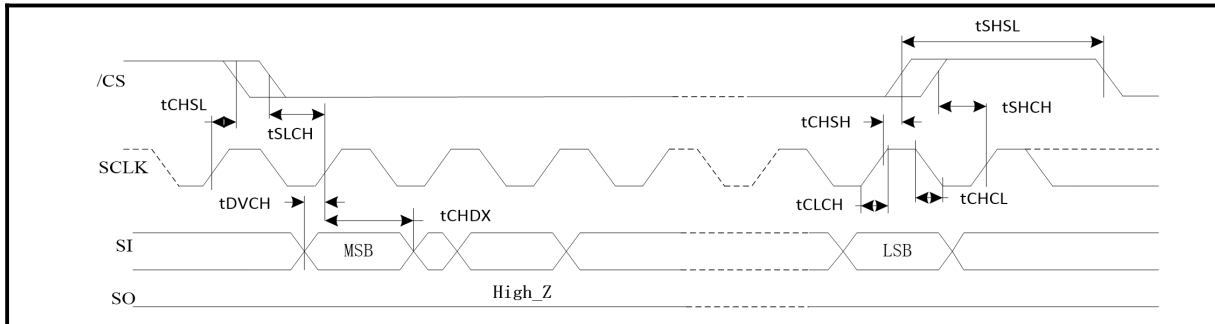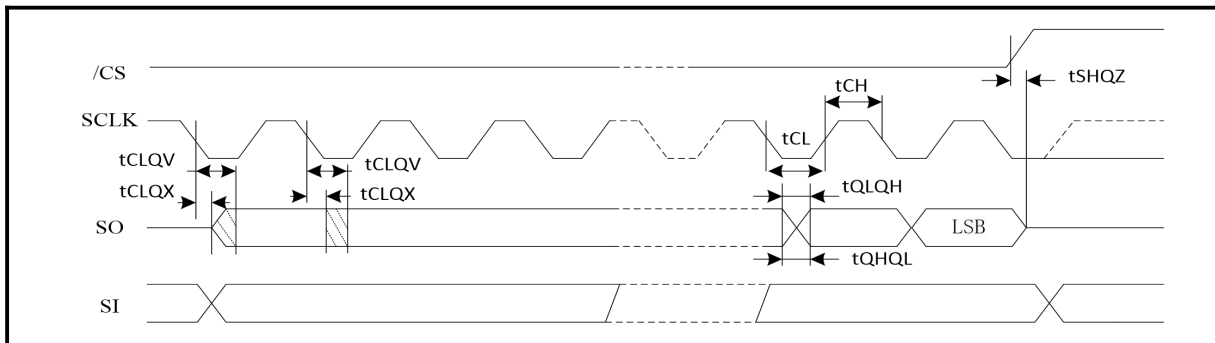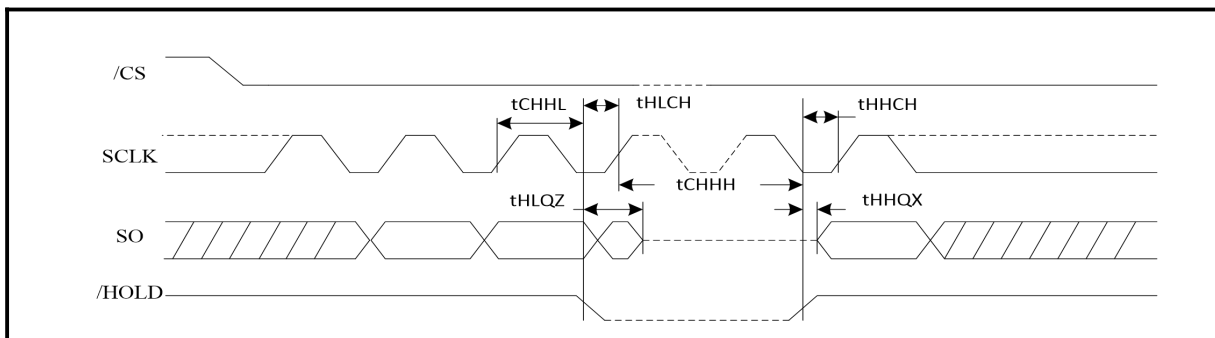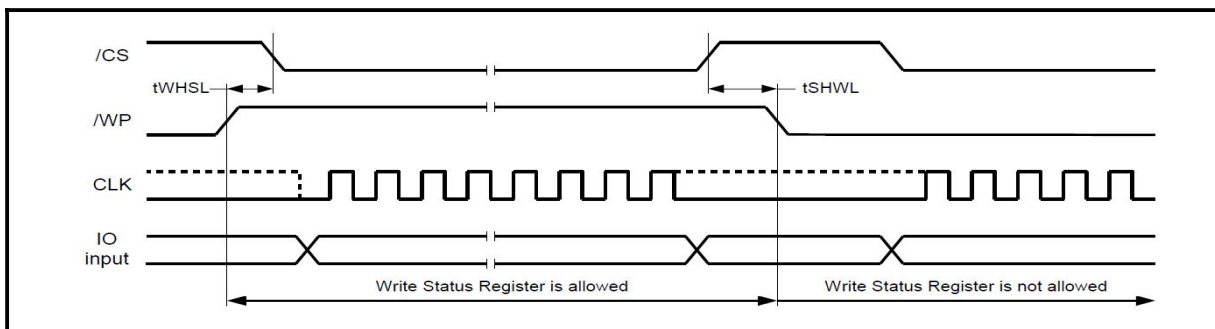Figure 74. Serial input Timing

Figure 75. Output Timing

Figure 76. Hold Timing

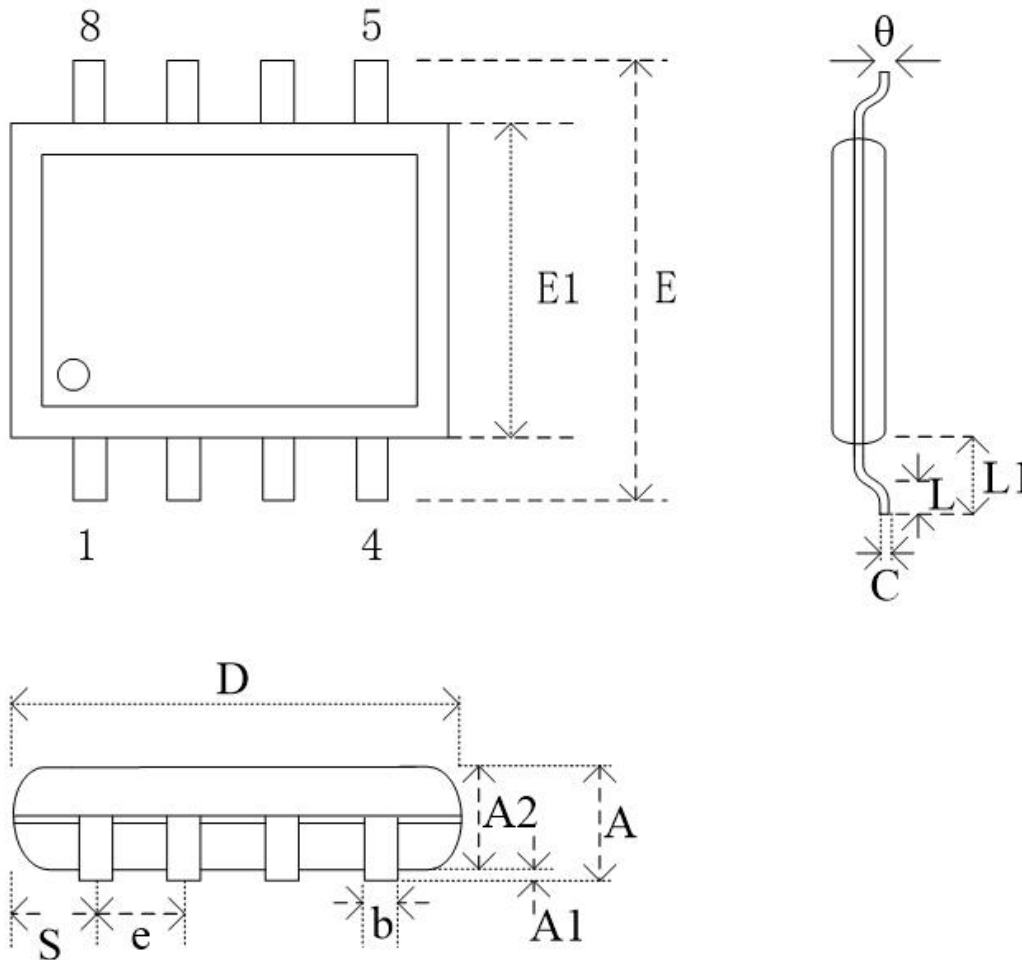Figure 77. /WP Timing


9. Package Information

9.1 Package 8-Pin SOP 208-mil




Dimensions

| Symbol | | A | A1 | A2 | b | C | *D | E | *E1 | e | L | L1 |
|--------|-----|------|------|------|------|------|------|------|------|------|------|--------------|
| Unit | | | | | | | | | | | | |
| mm | Min | - | 0.05 | 1.70 | 0.38 | 0.19 | 5.00 | 7.70 | 5.16 | 1.27 | 0.50 | 1.31 REF. |
| | Nom | - | 0.15 | 1.80 | - | - | - | 7.90 | - | 1.27 | 0.65 | |
| | Max | 2.15 | 0.25 | 1.90 | 0.50 | 0.25 | 5.33 | 8.10 | 5.38 | 1.27 | 0.80 | |

Note:

- 1、*D This size does not include burrs.
- 2、*E1 This size does not include burrs.

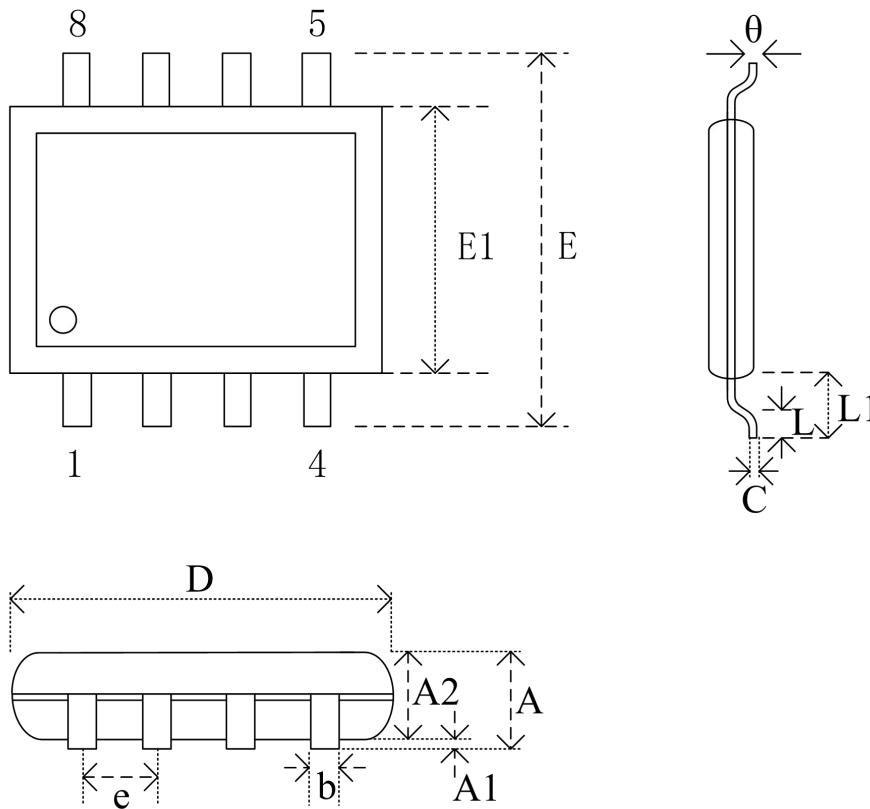9.2 Package 8-Pin SOP8 150mil




Dimensions

| Symbol | A | A1 | A2 | b | C | D | E | E1 | e | L | L1 | θ | |
|--------|-----|------|------|------|------|------|------|------|------|------|------|----------|---|
| Unit | | | | | | | | | | | | | |
| mm | Min | - | 0.05 | 1.30 | 0.37 | 0.10 | 4.80 | 5.80 | 3.80 | 1.27 | 0.40 | 1.05 | 0 |
| | Nom | - | - | 1.40 | - | - | 4.90 | 6.00 | 3.90 | | - | | 5 |
| | Max | 1.75 | 0.25 | 1.55 | 0.49 | 0.25 | 5.00 | 6.20 | 4.00 | | 1.00 | | 8 |

Note:

- 1、*D This size does not include burrs.
- 2、*E1 This size does not include burrs.

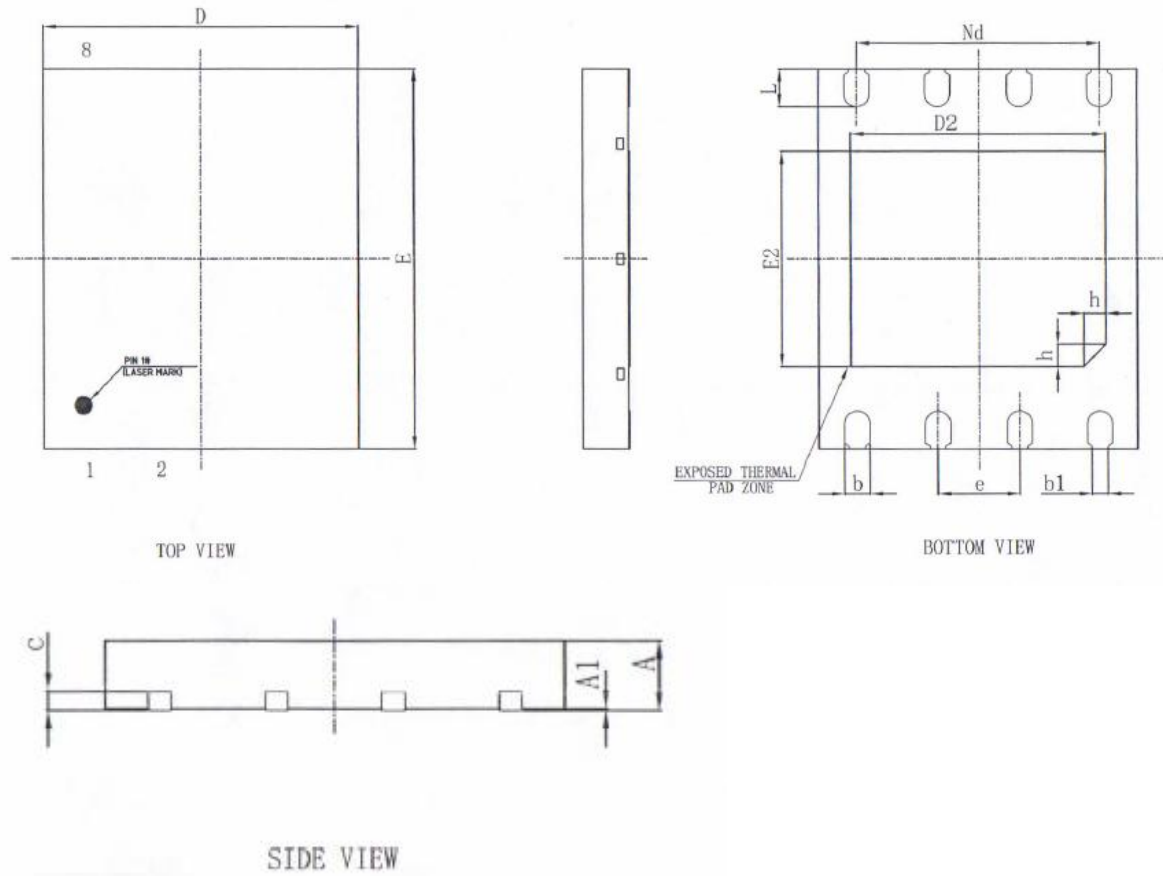9.3 Package 8-Pad WSON8 5*6mm




Dimensions

| Symbol | A | A1 | b | b1 | c | D | Nd | e | E | D2 | E2 | L | h | |
|--------|-----|------|------|------|---------|-------|------|---------|---------|------|------|------|------|------|
| Unit | | | | | | | | | | | | | | |
| mm | Min | 0.70 | 0 | 0.35 | 0.25REF | 0.18 | 4.90 | 3.81BSC | 1.27BSC | 5.90 | 3.90 | 3.30 | 0.55 | 0.30 |
| | Nom | 0.75 | 0.02 | 0.40 | | 0.203 | 5.00 | | | 6.00 | 4.00 | 3.40 | 0.60 | 0.35 |
| | Max | 0.80 | 0.05 | 0.45 | | 0.25 | 5.10 | | | 6.10 | 4.10 | 3.50 | 0.65 | 0.40 |

Note:

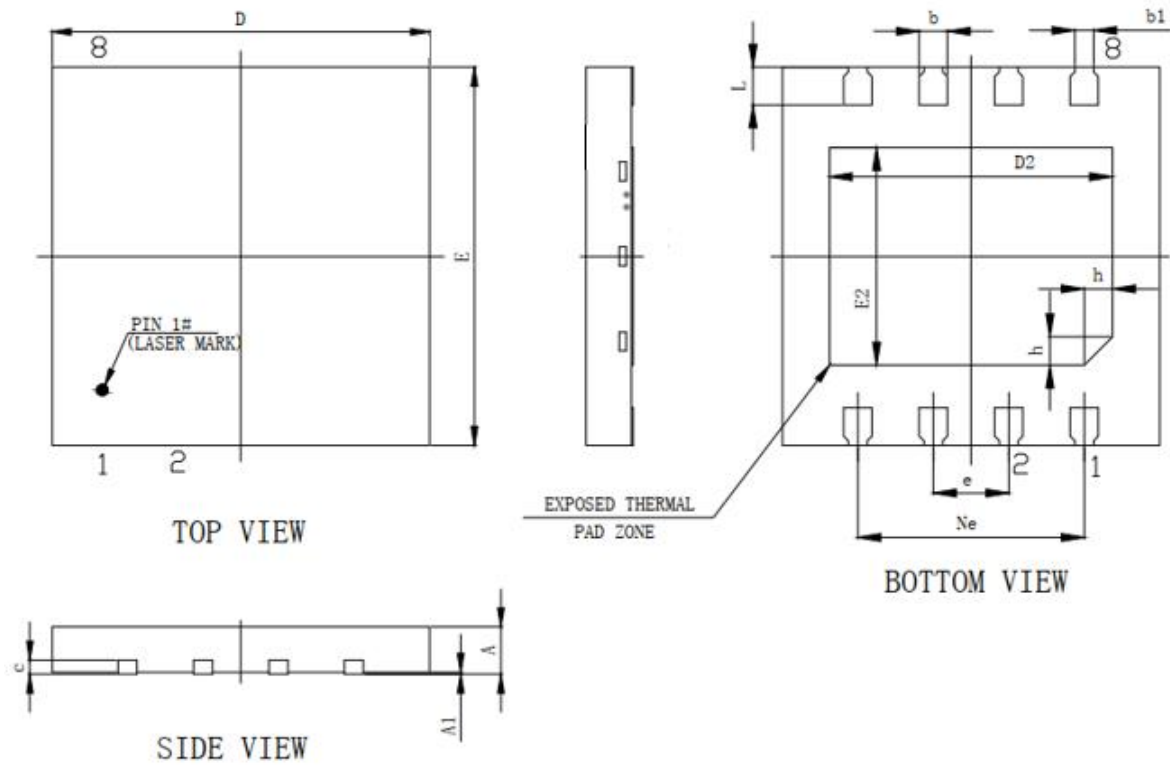- The exposed metal pad area on the bottom of the package is floating.

9.4 Package 8-Pad USON8 4X4mm

Dimensions


| Symbol | A | A1 | b | b1 | c | D | D2 | Ne | e | E | E2 | L | h | |
|--------|-----|------|------|------|------|------|------|------|---------|---------|------|------|------|------|
| Unit | | | | | | | | | | | | | | |
| mm | Min | 0.50 | 0 | 0.25 | 0.15 | 0.10 | 3.90 | 2.90 | 2.40BSC | 0.80BSC | 3.90 | 2.20 | 0.35 | 0.25 |
| | Nom | 0.55 | 0.02 | 0.30 | 0.20 | 0.15 | 4.00 | 3.00 | | | 4.00 | 2.30 | 0.40 | 0.30 |
| | Max | 0.60 | 0.05 | 0.35 | 0.25 | 0.25 | 4.10 | 3.10 | | | 4.10 | 2.40 | 0.45 | 0.35 |

Note:

- The exposed metal pad area on the bottom of the package is floating.

10. Order Information

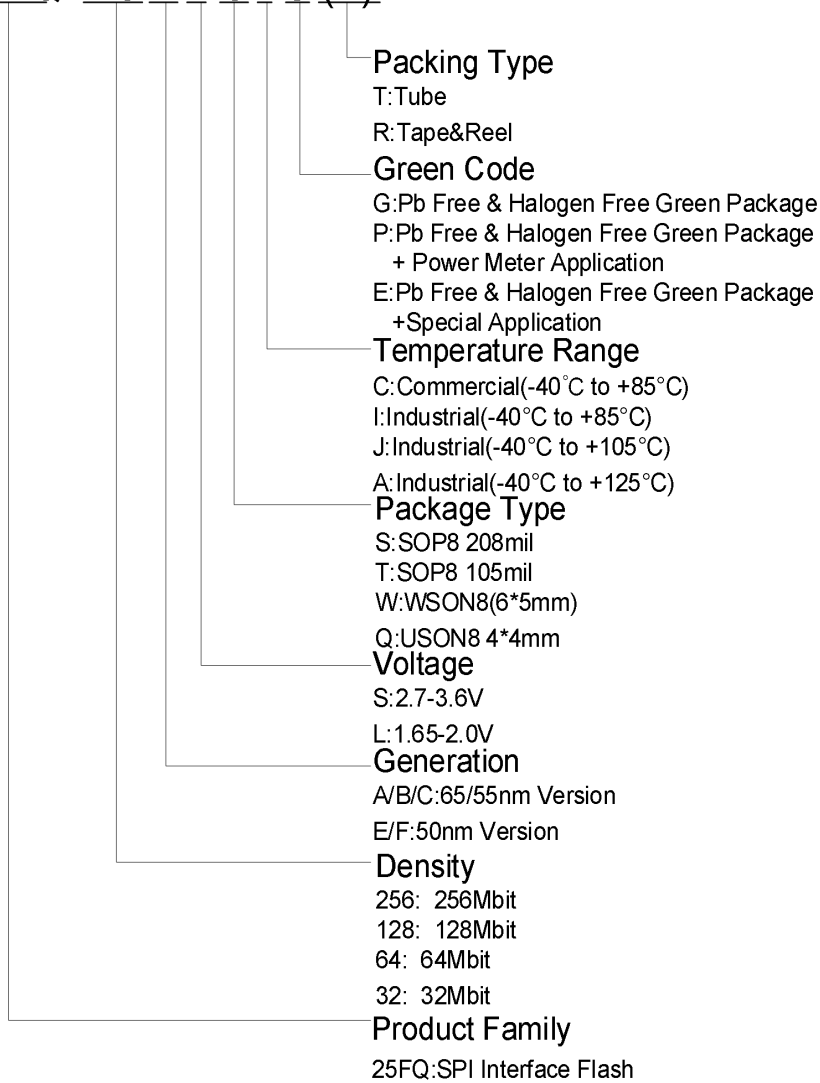BY 25FQ 128 E L S I G (T)



10.1 Valid part Numbers

The following table provides the valid part numbers for BY25FQ128EL SPI Flash Memory. Pls contact BYTe Semiconductor for specific availability by density and package type.

For consumer and industry application:

(T= -40°C~85°C, VCC=1.65~2.0V)

| Package Type | Density | Product Number |
|------------------|----------|----------------|
| S SOP8 208mil | 128M-bit | BY25FQ128ELSIG |
| W WSO8 6X5mm | 128M-bit | BY25FQ128ELWIG |
| Q USO8 4X4mm | 128M-bit | BY25FQ128ELQIG |
| T SOP8 150mil | 128M-bit | BY25FQ128ELTIG |

(T= -40°C~105°C, VCC=1.65~2.0V)

| Package Type | Density | Product Number |
|------------------|----------|----------------|
| S SOP8 208mil | 128M-bit | BY25FQ128ELSJG |
| W WSO8 6X5mm | 128M-bit | BY25FQ128ELWJG |
| Q USO8 4X4mm | 128M-bit | BY25FQ128ELQJG |
| T SOP8 150mil | 128M-bit | BY25FQ128ELTJG |

(T= -40°C~125°C, VCC=1.65~2.0V)

| Package Type | Density | Product Number |
|------------------|----------|----------------|
| S SOP8 208mil | 128M-bit | BY25FQ128ELSAG |
| W WSO8 6X5mm | 128M-bit | BY25FQ128ELWAG |
| Q USO8 4X4mm | 128M-bit | BY25FQ128ELQAG |
| T SOP8 150mil | 128M-bit | BY25FQ128ELTAG |

10.2 Minimum Packing Quantity (MPQ)

| Package Type | Packing Type | Qty for 1 Tube or Reel | Vacuum bag/ Inner Box | MPQ |
|----------------|--------------------------------|------------------------|-------------------------------|--------|
| SOP8 208mil | Tube | 95ea/Tube | 100Tubes/Bag 1Bag/InnerBox | 9,500 |
| | Tape&Reel (13inch, 16mm) | 2000ea/Reel | 1Reel/Bag 2Bags/InnerBox | 4,000 |
| WSON8 5X6mm | Tape&Reel (13inch) | 3000ea/Reel | 1Reel/Bag 1Bag/InnerBox | 3,000 |
| USON8 4X4mm | Tape&Reel (13inch) | 3000ea/Reel | 1Reel/Bag 1Bag/InnerBox | 3,000 |
| SOP8 150mil | Tube | 100ea/Tube | 100Tubes/Bag 1Bag/InnerBox | 10,000 |
| | Tape&Reel (13inch, 16mm) | 4000ea/Reel | 1Reel/Bag 1Bags/InnerBox | 4,000 |

11. Document Change History

| REVISION | DATE | ORIGINATOR | DESCRIPTION |
|----------|------------|---------------|---|
| 1.0 | 2022-07-05 | Zuohuan Yu | Initiate; Base on BY25FQ128ELS_v1.0; |
| 1.1 | 2023-02-10 | Zuohuan Yu | Update Commercial Temperature Range |
| 1.2 | 2023-04-04 | Zuohuan Yu | Update the logo and abbreviation |
| 1.3 | 2023-10-26 | Zuohuan Yu | Update package information |
| 1.4 | 2024-01-30 | Tijun Gui | 1. Change P/N from 25Q128EL to 25FQ128EL 2. Update supply voltage: 1.65~2.0V 3. Add DC/AC at 105°C and 125°C 4. Distinguish tERS into 4K and 64K |
| 1.5 | 2024-2-28 | Zuohuan Yu | Udata Packing Quantity |
| 1.6 | 2024-3-6 | Zuohuan Yu | Udata AC/DC information, add SFDP |
| 1.7 | 2024-3-14 | Xingyue Huang | Removed the E3h command from the command table |
| | | | |
| | | | |